



SEAL IDENTIFICATION GUIDE™

IS 7

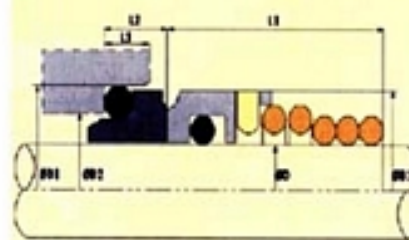


Generally O ring mounted carbon seat, solid stainless steel rotary face (sometimes with carbon, Tungsten or Silicon insert). Tapered spring grips shaft to give drive so direction of winding is important O ring seals rotary head to shaft. Metric sizes only.

IS 8

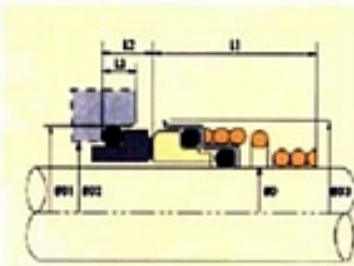

As IS7 but standard is carbon seat with ceramic rotary face located in pressed steel head. Metric sizes only.

IS 9

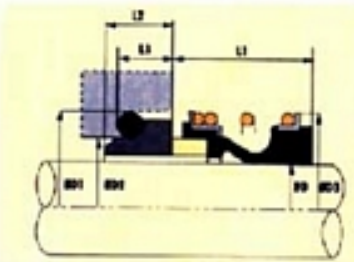

Robust single spring enclosed rubber bellows seal. Sometimes has 'Burgmann' and style number moulded into rubber bellows next to seal face insert. Metric sizes only.

SEE PAGE 6 FOR FACE MATERIAL, ELASTOMER & SEAT STYLE GUIDE