

# ACP (CONCRETE) LIMITED

## PRECAST MOVABLE CONCRETE PANELS

- Designed to Eurocode 2 & CE Marked.
- Robust, Durable, High Strength Movable Walls
- Quick and Easy to install
- Interlocking vertical unit connections without secondary steel plates
- High Impact Resistance
- Single or Double Loading
- Low cost.
- High mass base with a self cleaning 45° shedding angle
- 90° Unit to floor joint for easy outloading & reduced machinery damage
- Variable height walling up to 4.0m high
- Flexible handling with tine slots and cast in lifters
- Foundation Free - No Wet Trades
- All Weather Construction

# Arrow Panels



Completed storage bunkers with 3.6m, 3.0m and 2.4m high Arrow panels.



Positive panel-to-panel connection with the tongue and groove base joint system.



ACP Arrow Panels minimize wasted space and maximise flexibility.



BRITISH  
PRECAST





# ACP Wall Panels

## Arrow Panel Details


Height	Weight	Width	Stem	Base
2.4m	2.59t	1.0m	200mm	1.55m
3.0m	2.88t	1.0m	200mm	1.55m
3.6m	3.15t	1.0m	200mm	1.55m
4.0m	3.35t	1.0m	200mm	1.55m

All **ACP Wall Panels** are manufactured to the highest quality standards in factory controlled conditions. With over 900m of wall panel moulds under one roof, ACP is able to produce massive quantities of high quality wall units day after day.

The precast Arrow panels are available in standard heights from 2.4m to 4.0m. All but the 4.0m units are completely freestanding and do not require fixing down, the heavy base section providing the ballast right where it's needed. Non standard heights are available on a pro- rata basis if required. Special corner units are supplied to form the full bunker system

Quality precast concrete products demand high quality raw materials. **ACP's** concrete is mixed on site in a "state of the art" 80 cubic metre per hour batching plant.


Quality control runs right back to the quarry with **ACP's** parent company the **Thomas Armstrong Group** controlling the supply of all the bulk components of the mix.

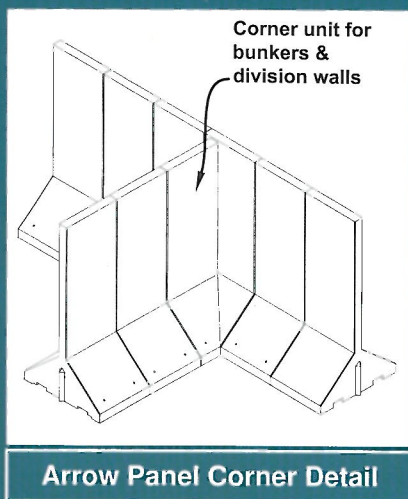

The **ACP Wall Panels** can be delivered and installed by the same professional team.

Units are regularly installed with a telehandler, further reducing the cost and time to complete the project. Repositioning can be carried out using the cast in top edge lifting system or the simple pallet fork slots cast into the base.

To find out how **ACP (Concrete) Ltd** can improve your storage facilities please call 01889 598660

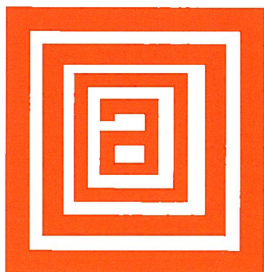

**ACP (Concrete) Limited**  
Concrete Panel Division  
Wood Lane Business Centre  
Wood Lane, Uttoxeter  
Staffs ST14 8JR

Tel: 01889 598660 Fax: 01889 568160  
[www.acp-concrete.co.uk](http://www.acp-concrete.co.uk)