



# Kraus & Naimer

BLUE LINE switchgear

since 1907

## Catalog 120 Control Switches

07/2016

CG, CH and CHR type up to 25 A



---

# Kraus & Naimer

The development of the Blue Line rotary switch, contactor and motor starter product ranges is based on more than hundred years experience by Kraus & Naimer in the design and manufacture of electrical switchgear. Kraus & Naimer pioneered the introduction of the cam operated rotary switch and continues to be recognized as the world leader in that product field.

## BLUE LINE

Blue Line products are protected by numerous patents throughout the industrial world. They are built to national and international standards and designed to withstand adverse temperatures and climates.

Blue Line products are accepted and universally recognized for their quality and workmanship. They are supported by a worldwide sales and service organization.

The Kraus & Naimer Registered Trademark



WORLDWIDE SYMBOL  
FOR QUALITY SWITCHGEAR

---

---

Disconnectors and Main Switches acc. to IEC 60947-3 see Catalog 500

<b>Contents</b>	<b>Page</b>
Construction Data	4
Dimensions and Nominal Ratings	5
How to order	6, 7
Switch Function and Configuration	
ON/OFF Switches	8, 9
Double-throw Switches	10-12
General Application Switches	12
Coding Switches	13
Multi-step Switches	14-16
Voltmeter Switches	17-19
Ammeter Switches	19-21
Volt-ammeter Switches	21
Control Switches	21, 22
Motor Switches	23-25
Types of Mounting	
Panel Mounting	26-29
Base Mounting	30, 31
Escutcheon Plates	32, 33
Handles	34
International Standards and Approvals	35
Technical Data	36-38
Tightening torque of screws	39
Dimensions	
Panel Mounting	40-43
Base Mounting	44, 45
Overall Switch Lengths	45, 46
Blue Line Switchgear: Summary	48

---

## Construction Data

Cam switches of the CG, CH and CHR-series are designed for universal application and may ideally be used for control switches, instrumentation switches and motor control switches. Different contact designs, contact materials and terminals allow the use as well as in electronic circuitry and in aggressive environments in accordance with IEC 60947-3, EN 60947-3, VDE 0660 part 107, UL and cUL (cUR).

The stage is the basis for all switches and can be supplied with a maximum of 2 contacts. All switches of this series are supplied with open terminals which are accessible while the switch is installed. The terminals are protected against accidental finger contact according to EN 50274, VDE 0660 part 514 and BGV A3. Captive plus-minus terminal screws and integrated screwdriver guides facilitate wiring. Due to the particular arrangement of the terminals of the CG switches, it is possible


to install the switches closely, side by side, or to mount them directly at the cable trays. The contact terminal numbers are easy to read, even if the switch is installed.

The captive plus-minus screws of the CH and CHR-series are located about 90° apart from the terminal direction. This allows for connecting wires without any interference with the terminal screws.

For connection with ring type terminals the CHR-series were designed. The switches are supplied with large open terminals. This allows for connection without removing the screws.


### 3 different Contact Systems are available

CG6 to  
CHR16B




A rigid, double-break bridge with silver alloy contacts provides high making and breaking capabilities for regular control applications.

CG4 and  
CG4-1




High contact reliability by multiple cross-point contacts, CG4 with 1 μ and CG4-1 with 35 μ gold plating.

CGD4-1



High contact reliability by H-bridge design with "cross-wire" contacts. The contact system with gold-plated contacts (CH12/CHR12 with silver contact) allows for low voltages, electronic compatible.

CH11/CHR11  
CH12/CHR12





Type	Size	Possible Switching Angles	Max. No. of Stages
CG4-CGD4-1	S00	30°, 45°, 60°, 90°	8
CG6-CHR6	S00	30°, 45°, 60°, 90°	4
CG8-CHR16	S0	30°, 45°, 60°, 90°	12
CG8B	S1	30°, 45°, 60°, 90°	12
CH10B-CHR16B	S1	30°, 45°, 60°, 90°	12
CG8S	S0	60°	on request

CG-series




CH-series

CHR-series

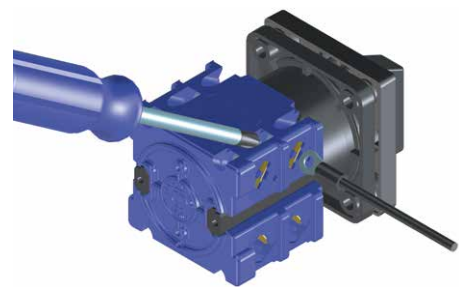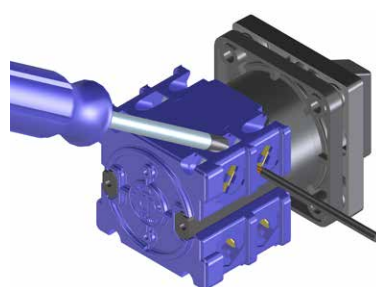

Above illustrates the standard terminal positions.

## Nominal Ratings

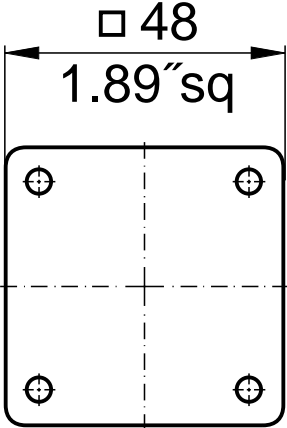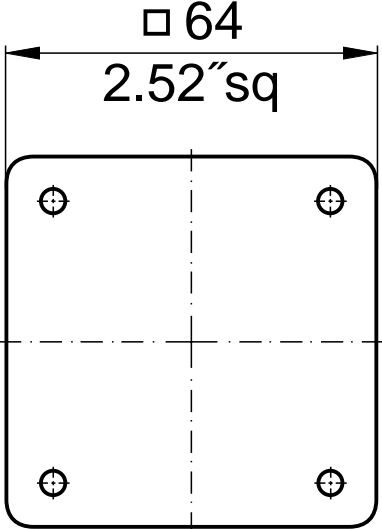Switch Size	Type	According to IEC 60947-3, EN 60947-3, VDE 0660 part 107			
		Operational Voltage <sup>1</sup> $U_e$ <b>V</b>	Thermal Current $I_u/I_{th}$ <b>A</b>	Motor Rating 3 x 380 V-440 V AC-23A AC-3 <b>kW kW</b>	
<b>S00</b> 	<b>CG4</b>	440	10	3	2,2
	<b>CG4-1</b>	440	10	3	2,2
	<b>CGD4-1</b>	440	5	-	-
	<b>CG6</b>	690	20	7,5	5,5
	<b>CH6</b>	690	20	7,5	5,5
	<b>CHR6</b>	690	20	7,5	5,5
<b>S0</b> 	<b>CG8</b>	690	20	7,5	5,5
	<b>CH10</b>	690	20	7,5	5,5
	<b>CH11</b>	600	6	-	-
	<b>CH12</b>	600	6	-	-
	<b>CH16</b>	690	25	11	7,5
	<b>CHR10</b>	690	20	7,5	5,5
	<b>CHR11</b>	600	6	-	-
	<b>CHR12</b>	600	6	-	-
	<b>CHR16</b>	690	25	11	7,5
	<b>S1</b> 	<b>CH10B</b>	690	20	7,5
<b>CH16B</b>		690	25	11	7,5
<b>CHR10B</b>		690	20	7,5	5,5
<b>CHR16B</b>		690	25	11	7,5

For further technical details, refer to pages 36-38.

<sup>1</sup>Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request.

## How to order

Disconnectors and Main Switches according to IEC 60947-3 see Catalog 500

Three types of data (shown below) are required for ordering Blue Line cam-operated switches. Code numbers for ordering are shown in this catalog.

### 1. Type of Switch

The type of switch required may be easily selected by referring to the table on page 5 which shows the thermal current, power rating and dimensions of each switch. For further technical details, refer to pages 36-38. Variations of contacts and terminals are shown below.

### 2. Switch Function

The code numbers for standard switches shown on pages 8-25 indicate the switch function, escutcheon plate, handle and any optional extras.

Additional coding to modify type and color of handle and escutcheon plate is explained below.

### 3. Type of Mounting

Types of mounting are shown on pages 26-31. Catalog **101** describes enclosures and optional extras.

Specify the mounting code to indicate required mounting.

**CH10**

**A202-600**

**VE**

## Type of Switch

Extending the switch type coding the following combinations will define:

Amendment	Definition	For switch types
-1	with gold contacts <sup>1</sup>	CG4-1, CGD4-1, CH10-1, CH10B-1, CH16B-1, CHR6-1, CHR10-1
-4 <sup>2</sup>	with quick connects (nickel-plated)	CH10-4, CH10B-4, CH16-4, CH16B-4
-6 <sup>2</sup>	with angled quick connects (nickel-plated)	CH10-6, CH10S-6, CH16-6
B	S0 switches with latching mechanism size S1	CH6-6, CH10-6, CH10S-6, CH16-6 CG8B, CH10B, CH11B, CH12B, CH16B, CH16B, CHR10B, CHR16B for four hole panel mounting
L	with lockout-relay w/o manual release	CH10L, CHR10L, CHR16L
M	with lockout-relay with manual release	CHR10M
X	with power failure release	CG8X
R	with spring return latching mechanism	CG8R, CH10R, CH11R, CHR10R, CHR11R
S	with snap action	CG8S, CH10S, CH16S, CHR10S, CHR16S with 60° or 90° switching
Y	with power failure release and trip-free release	CG8Y

**Example:** Coding for switch type **CH10** with latching mechanism size S1 is **CH10B**.

## Modification of Switches

The part number for switch function and options may be modified in cases where items are required other than standard. The modification may involve the escutcheon plate inscription, color combination of escutcheon plate and handle, type of escutcheon plate and handle or the optional extra.

Switch Size	Escutcheon Plate Frame	Handle	Escutcheon Plate Backing	Escutcheon Plate Lettering	Dash Number
S00, S0, S1	black	black	brushed alu	black	-600
S00, S0, S1	black	black	black	mat silver	-700

<sup>1</sup>Technical data on request. <sup>2</sup>Connection Diagrams on request.

## How to order

### Modification of Switches

The standard switch consists of a transparent escutcheon plate with brushed aluminum backing and black inscription. The escutcheon plate frame is black as well as the handle. Page 6 shows further color combinations of escutcheon plate and handle which are available. The appropriate dash number must be substituted in the switch function coding to specify other color combinations as required.

**Example:** The complete coding for switch type CG8 with a 3 pole ON/OFF switch function, black handle and black escutcheon plate frame with brushed aluminum backing and black inscription which reads 0-1 is as follows: **CH10 A202-600 E**.

The following is a list of special programs for escutcheon plate and handle combinations. They may be obtained by specifying any one of the following two (2) digit dash numbers as a part of the overall dash number. It is still necessary to prefix these two digit numbers with the first digit which represents the color combination desired.

#### Special programs for escutcheon plate and handle combinations

- 000** = without escutcheon plate, without handle
- .01** = without escutcheon plate
- .02** = without handle
- .03** = with square escutcheon plate without lettering
- .04** = with rectangular escutcheon plate without lettering
- .05** = with square escutcheon plate without lettering and without handle
- .06** = with rectangular escutcheon plate without lettering and without handle
- .07** = standard escutcheon plate, without lettering on rectangular section
- .08** = with F-handle
- .09** = with P-handle
- .10** = escutcheon plate frame and fixation ring only (if using switches with single hole mounting: -**.16**)
- .11** = without escutcheon plate, but with handle bearing plate
- .12** = with yellow escutcheon plate backing and red handle
- .14** = with B-handle
- .16** = escutcheon plate frame and fixation ring only if using switches with single hole mounting
- .17** = standard escutcheon plate and rectangular add-on escutcheon plate if using switches with single hole mounting FT2

**Example:** The complete coding for switch type CH10 with a 3 pole ON/OFF switch function with black face plate frame, square face plate without lettering, brushed aluminum plate backing and black handle reads as follows: **CH10 A202-603 E**.

### Handles, Escutcheon Plates and Optional Extras

The handles for standard switches shown on pages 8-25 are suitable for mounting units with four hole mounting. Alternative types of handles available are illustrated on pages 26-31.

When a handle, escutcheon plate or optional extra is required but not covered by the dash number, the code number for the selected component should be entered separately. A comprehensive range of available standard escutcheon plates is illustrated on pages 32-34. Non-standard or special escutcheon plate engravings are available at extra cost. The large number of optional extras and enclosures is covered in Catalog 101.

### Switch Size

CG, CH and CHR switches are available in sizes S00, S0 and S1. These size codes indicate the dimension of the mounting, the escutcheon plate and the handle, as well as the size of optional devices and enclosures. Page 5 lists these sizes and the various switch types they include.

### Ordering of Special Switches and Escutcheon Plates

When ordering special switches and escutcheon plates it is advisable to use our order form, as illustrated. The customer's requirements are shown in blue as an example.

For technical reasons, it may not be possible to follow the sequence of contacts requested by the customer. The final contact development which is sent with every switch will show the customer's original terminal markings.




























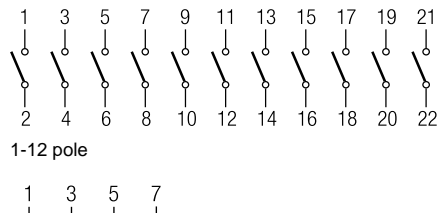




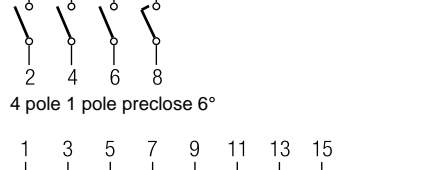




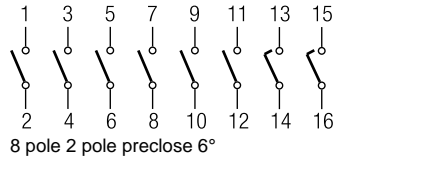

ESCUTCHEON PLATE	SWITCH	MOUNTING	FRAM	DATE
<p>MOTOR 1</p> <p>POSITIONS</p> <p>O H A</p>	1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40	CH16	VE	
	OPTIONAL PLATE	MOD4		
	EXTRAS			
HANDLE	G251			

Order forms are available on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

ON/OFF Switches with 60° Switching

[Dimensions p. 46](#)

1 pole 2 pole 3 pole 3 pole with red handle 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° <sup>1</sup> 9 pole 10 pole 11 pole 12 pole	 F070					A200-600 A201-600 A202-600 A202-626 A203-600 WAA653 WAA341 A342-600 A343-600 A344-600 WAA654 WAA345 A346-600 WAA347 A348-600	1 1 2 2 2 2 3 4 4 4 4 5 5 6 6		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole 7 pole 8 pole 8 pole 2 pole preclose 6° <sup>1</sup> 9 pole 10 pole 11 pole 12 pole	 F088					A200-620 A201-620 A202-620 A203-620 WAA653 WAA341 A342-620 A343-620 A344-620 WAA654 WAA345 A346-620 WAA347 A348-620	1 1 2 2 2 2 3 4 4 4 4 5 6 6		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole	 F088-PRL					A200-621 A201-621 A202-621 A203-621 WAA653 WAA341 A342-621	1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole	 F198					A200-622 A201-622 A202-622 A203-622 WAA653 WAA341 A342-622	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole	 F198-PRL					A200-623 A201-623 A202-623 A203-623 WAA653 WAA341 A342-623	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole	 F328-PRL					A200-624 A201-624 A202-624 A203-624 WAA653 WAA341 A342-624	1 1 2 2 2 3 3		
1 pole 2 pole 3 pole 4 pole 4 pole 1 pole preclose 6° <sup>1</sup> 5 pole 6 pole	 F323-PRL					A200-625 A201-625 A202-625 A203-625 WAA653 WAA341 A342-625	1 1 2 2 2 3 3		

[< back to table of contents >](#)











































































<sup>1</sup>For use in a three phase four-wire system with switched neutral.



Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			























































ON/OFF Switches with 90° Switching

[Dimensions p. 46](#)

1 pole contacts	 <p>F056</p>					A290-600	1	 <p>1, 2, 3, 4, 5 and 6 pole</p>
2 pole preclose 30°						A291-600	1	
3 pole						A292-600	2	
4 pole						A324-600	2	
4 pole 1 pole preclose 60° <sup>1</sup>						A293-600	2	
4 pole 3 pole preclose 30°						WAA327	2	
5 pole contacts	 <p>F063</p>					A290-620	1	 <p>4 pole 1 pole preclose 60°</p>
2 pole preclose 30°						A291-620	1	
3 pole						A292-620	2	
4 pole						A324-620	2	
4 pole 1 pole preclose 60° <sup>1</sup>					A293-620	2	 <p>4 pole 3 pole preclose 30°</p>	
4 pole 3 pole preclose 30°					WAA327	2		
5 pole contacts					WAA325	3		
6 pole preclose 30°					A326-620	3		
3 pole 360° rotation	 <p>F062</p>  <p>F206</p>					WAA208	2	
						WAA208	2	
3 pole for foot operation				 <sup>2</sup>	WAA386	2		

[< back to table of contents >](#)

ON/OFF Switches with 30° Switching








































































1 pole	 <p>F169</p>					WAA100	1	 <p>1-4 pole</p>
2 pole						WAA101	1	
3 pole						WAA102	2	
4 pole						WAA103	2	
1 pole with spring return	 <p>F153</p>					A204-600	1	 <p>1-4 pole</p>
2 pole with spring return						A205-600	1	
3 pole with spring return						WAA206	2	
4 pole with spring return					WAA207	2		
1 pole with spring return	 <p>F169</p>					A204-620	1	
2 pole with spring return						A205-620	1	
3 pole with spring return						WAA206	2	
4 pole with spring return						WAA207	2	

<sup>1</sup>For use in a three phase four-wire system with switched neutral. <sup>2</sup>available as switch types CH16B and CHR16B

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>2</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

































Double-throw Switches without „OFF“ 60° Switching

[Dimensions p. 46](#)






















































1 pole	 <p>F072</p>					A220-600	1	
2 pole						A221-600	2	
3 pole						A222-600	3	
4 pole						A223-600	4	
4 pole 1 pole preclose 6° <sup>1</sup>						WAA673	4	
5 pole						A369-600	5	
6 pole						A370-600	6	
7 pole						A371-600	7	
8 pole						A372-600	8	
8 pole 2 pole preclose 6° <sup>1</sup>						WAA972	8	
9 pole						WAA373	9	
10 pole						WAA374	10	
11 pole					WAA375	11		
12 pole					WAA376	12		

[< back to table of contents >](#)

Double-throw Switches without „OFF“ with electrically isolated contacts

1 pole	 <p>F072</p>					A720-600	1	
2 pole						A721-600	2	
3 pole						A722-600	3	
4 pole						A723-600	4	
4 pole 1 pole preclose 6° <sup>1</sup>						WAA973	4	
1 pole with spring return	 <p>F026</p>					A795-600	1	

Double-throw Switches without „OFF“ 30° Switching





































1 pole	 <p>F026</p>					WAA120	1	
2 pole						WAA121	2	
3 pole						WAA122	3	
4 pole						WAA123	4	
1 pole with spring return	 <p>F026</p>					A295-600	1	
2 pole with spring return						A296-600	2	
3 pole with spring return						WAA297	3	
1 pole with spring return	 <p>F153</p>					A295-620	1	
2 pole with spring return						A296-620	2	
3 pole with spring return						WAA297	3	

<sup>1</sup>For use in a three phase four-wire system with switched neutral. <sup>2</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>2</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			













Double-throw Switches with Center „OFF“ 60° Switching

Dimensions p. 46













1 pole	 F071					A210-600	1	 1-4 pole
2 pole		A211-600	2					
3 pole		A212-600	3					
4 pole		A213-600	4					
4 pole 1 pole preclose 6° <sup>1</sup>		WAA913	4					
5 pole		A361-600	5					
6 pole		A362-600	6					
7 pole		WAA363	7					
8 pole	WAA364	8						
8 pole 2 pole preclose 6° <sup>1</sup>	WAA664	8						
1 pole	 F090					A210-620	1	 4 pole 1 pole preclose 6°
2 pole		A211-620	2					
3 pole		A212-620	3					
4 pole		A213-620	4					
4 pole 1 pole preclose 6° <sup>1</sup>		WAA913	4					
5 pole		A361-620	5					
6 pole		A362-620	6					
7 pole		WAA363	7					
8 pole	WAA364	8						
8 pole 2 pole preclose 6° <sup>1</sup>	WAA664	8						
1 pole	 F085					A210-621	1	 6 and 7 pole
2 pole		A211-621	2					
3 pole		A212-621	3					
1 pole	 F085-PRL					A210-622	1	 8 pole
2 pole		A211-622	2					
3 pole		A212-622	3					
1 pole	 F260					A210-623	1	 8 pole 2 pole preclose 6°
2 pole		A211-623	2					
3 pole		A212-623	3					
1 pole	 F732					A210-624	1	 8 pole 2 pole preclose 6°
2 pole		A211-624	2					
3 pole		A212-624	3					
4 pole 1 pole preclose 6° <sup>1</sup>		A213-624 WAA913	4					

[< back to table of contents >](#)

Double-throw Switches with Center „OFF“ 90° Switching

1 pole	 F057					A218-600	1	 1-4 pole
2 pole		A219-600	2					
3 pole		WAA299	3					
4 pole 1 pole preclose 6° <sup>1</sup>		WAA294	4					
1 pole	 F064					A218-620	1	 1-4 pole
2 pole		A219-620	2					
3 pole		WAA299	3					
4 pole 1 pole preclose 6° <sup>1</sup>		WAA294	4					

Double-throw Switches with Center „OFF“ and electrically isolated contacts

1 pole	 F071					A710-600	1	 1-4 pole
2 pole		A711-600	2					
3 pole		A712-600	3					
4 pole 1 pole preclose 6° <sup>1</sup>		A713-600 WAA963	4					
1 pole with spring return to center	 F025					A714-600	1	 1 and 2 pole
2 pole		A715-600	2					

<sup>1</sup>For use in a three phase four-wire system with switched neutral. <sup>2</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Double-throw Switches with Spring Return to Center

Dimensions p. 46

1 pole with spring return to center						A214-600 A215-600 A216-600	1 2 3	
2 pole						A214-620 A215-620 A216-620	1 2 3	
3 pole						A320-600 A321-600 A322-600	1 2 3	
1 pole with spring return from left to center						A320-600 A321-600 A322-600	1 2 3	
2 pole						A320-621 A321-621 A322-621	1 2 3	
3 pole						A320-621 A321-621 A322-621	1 2 3	

General Application Switches

1 pole 2 Gang						A310-600 A312-600 WAA314	1 2 3	
2 pole Switching sequence: 0, A, A+B						A310-620 A312-620 WAA314	1 2 3	
3 pole						A311-600 WAA313 WAA315	2 3 5	
1 pole 3 Gang						A311-620 WAA313 WAA315	2 3 5	
2 pole Switching sequence: 0, A, A+B, A+B+C						WAA330 WAA331 WAA332	1 2 3	
3 pole						WAA330 WAA331 WAA332	1 2 3	
1 pole 2 Gang						WAA339	2	
2 pole Series-parallel Switching						WAA339	2	
3 pole Switching sequence: 0, A+B series, A, A+B parallel						WAA339	2	

































<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH11 CH12	CH10B- CHR16B			

Coding Switches/Binary Code

[Dimensions p. 46](#)






















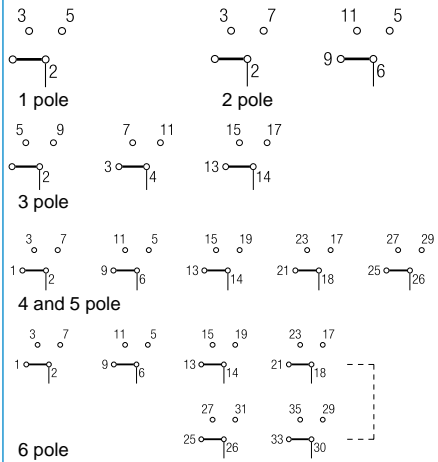





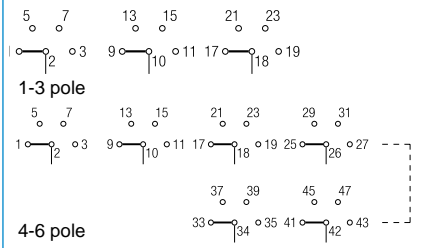











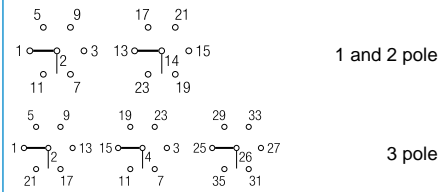




















< back to table of contents >

0 - 7 360° rotation	 F322			A540-600	2	
0 - 7 complement 360° rotation	 F322			WAA541	2	
0 - 7 + complement 360° rotation	 F322			WAA542	3	
0 - 9	 F007			A550-600	2	
0 - 9 complement	 F007			WAA551	2	
0 - 9 + complement	 F007			WAA552	4	
0 - 11 360° rotation	 F009			WAA543	2	
0 - 11 + complement 360° rotation	 F009			WAA545	4	

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Multi-step Switches without „OFF“

[Dimensions p. 46](#)

1 pole 3 Step 2 pole 3 pole 4 pole 5 pole 6 pole						A230-600 A250-600 A270-600 A476-600 WAA484 WAA489	2 3 5 6 8 9	 <p>1 pole</p> <p>2 pole</p> <p>3 pole</p> <p>4 and 5 pole</p> <p>6 pole</p>
1 pole 4 Step 2 pole 3 pole 4 pole 5 pole 6 pole						A231-600 A251-600 A271-600 A477-600 WAA485 WAA490	2 4 6 8 10 12	 <p>1-3 pole</p> <p>4-6 pole</p>
1 pole 5 Step 2 pole 3 pole 4 pole						A232-600 A252-600 WAA272 WAA478	3 5 8 10	 <p>1-4 pole</p>
1 pole 6 Step 2 pole 3 pole						A233-600 WAA253 WAA273	3 6 9	 <p>1 and 2 pole</p> <p>3 pole</p>
1 pole 7 Step 2 pole 3 pole						WAA234 WAA254 WAA274	4 7 11	 <p>1-3 pole</p>
1 pole 8 Step 2 pole 3 pole						WAA235 WAA255 WAA275	4 8 12	 <p>1-3 pole</p>
1 pole 9 Step						WAA236	5	
1 pole 10 Step						WAA237	5	
1 pole 11 Step						WAA238	6	
1 pole 12 Step 1 pole 360° rotation						WAA239 WAA639	6 6	

[< back to table of contents >](#)

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Multi-step Switches without „OFF“ with electrically isolated contacts [Dimensions p. 46](#)

1 pole 3 Step						A730-600	2	
2 pole						A750-600	3	
1 pole 4 Step						A731-600	2	
2 pole						A751-600	4	

[< back to table of contents >](#)

Multi-step Switches with „OFF“





























































































1 pole 2 Step						A240-600	1	
2 pole						A260-600	2	
3 pole						A280-600	3	
4 pole						WAA480	4	
5 pole						WAA486	5	
6 pole						WAA491	6	
1 pole						A240-620	1	1-6 pole
2 pole						A260-620	2	
3 pole						A280-620	3	
4 pole						WAA480	4	
5 pole						WAA486	5	
6 pole						WAA491	6	
1 pole 3 Step						A241-600	2	
2 pole						A261-600	3	
3 pole						A281-600	5	
4 pole						WAA481	6	
5 pole						WAA487	8	
1 pole						A241-620	2	
2 pole						A261-620	3	
3 pole						A281-620	5	
4 pole						WAA481	6	
5 pole						WAA487	8	
1 pole						A241-621	2	
2 pole						A261-621	3	

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Multi-step Switches with „OFF“

[Dimensions p. 46](#)

1 pole 4 Step 2 pole 3 pole 4 pole						A242-600 WAA262 WAA282 WAA482	2 4 6 8	
1 pole 2 pole 3 pole 4 pole						A242-620 WAA262 WAA282 WAA482	2 4 6 8	1-4 pole
1 pole 5 Step 2 pole 3 pole						A243-600 WAA263 WAA283	3 5 8	
1 pole 2 pole 3 pole						A243-620 WAA263 WAA283	3 5 8	1-3 pole
1 pole 6 Step 2 pole 3 pole						A244-600 WAA264 WAA284	3 6 9	
1 pole 2 pole 3 pole						A244-620 WAA264 WAA284	3 6 9	1-3 pole
1 pole 7 Step 2 pole						WAA245 WAA265	4 7	
1 pole 2 pole						WAA245 WAA265	4 7	1 pole                      2 pole
1 pole 8 Step						WAA246	4	
1 pole						WAA246	4	
1 pole 9 Step						WAA247	5	
1 pole						WAA247	5	
1 pole 10 Step						WAA248	5	
1 pole						WAA248	5	
1 pole 11 Step 1 pole 360° rotation						WAA249 WAA649	6 6	
1 pole 1 pole 360° rotation						WAA249 WAA649	6 6	

[< back to table of contents >](#)























<sup>1</sup>Connection diagrams for CHR switches on request.



Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CG8- CH10- CHR16	CH10B- CHR16B			

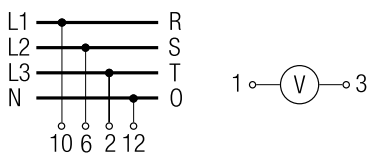










































Voltmeter Switches without „OFF“

[Dimensions p. 46](#)

3 phase 3 wire	 F792					A023-600	2	
	 F793					A023-620	2	
3 phase 3 wire 3 phase to phase and phase to neutral	 F794					A025-600	3	
	 F795					A025-620	3	

Voltmeter Switches with „OFF“

[< back to table of contents >](#)










































































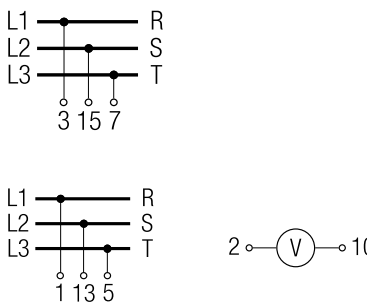



















2 pole 360° rotation	 F170-PRL					WAA002	1	
3 phase 3 wire	 F775					A004-600	2	
	 F776					A004-620	2	
	 F408-PRL					A004-621	2	
	 F777					A004-622	2	
	 F409-PRL					A004-623	2	
	 F778					A004-624	2	
	 F212-PRL					WAA011	2	

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Voltmeter Switches with „OFF“

[Dimensions p. 46](#)

3 phase to neutral						WAA005	2	
	F779					WAA005	2	
						WAA005	2	
	F780					WAA005	2	
						WAA005	2	
	F411-PRL					WAA005	2	
3 phase to phase and 3 phase to neutral						A007-600	3	
	F782					A007-620	3	
						A007-621	3	
	F783					A007-622	3	
						A007-623	3	
	F784					A007-624	3	
2 separate 3 phase with center „OFF“						WAA008	4	
	F786					WAA008	4	
						WAA008	4	
	F787					WAA008	4	
						WAA008	4	
	F418-PRL					WAA008	4	
						WAA008	4	
	F788					WAA008	4	

[< back to table of contents >](#)

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

## Voltmeter Switches with „OFF“

*Dimensions p. 46*

3 phase and 1 phase to neutral						WAA010	3	
	F789					WAA010	3	
						WAA010	3	
	F790					WAA010	3	
						WAA010	3	
	F419-PRL					WAA010	3	
						WAA010	3	
	F791					WAA010	3	

## Ammeter Switches

< back to table of contents >

Single pole with one current transformer						WAA046	1	
	F058					WAA046	1	
						WAA046	1	
	F208					WAA046	1	
	F340-PRL							
Single pole with 3 current transformers without „OFF“						A017-600	3	
	F181-PRL					A017-620	3	
						A017-620	3	
	F719				A017-620	3		
Single pole with 3 current transformers with „OFF“ 360° rotation						A048-600	3	
	F059					A048-620	3	
						A048-621	3	
	F066					A048-622	3	
						A048-622	3	
	F186					A048-623	3	
	F318-PRL							
	F172-PRL							

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CG8- CH10- CHR16	CH10B- CHR16B			

**Ammeter Switches**

*Dimensions p. 46*

Single pole with 2 current transformers (3 readings)	<p>F172-PRL</p>					A021-600	2	
	<p>F066</p>					A021-620	2	
Single pole with 4 current transformers	<p>F060</p>					WAA036	4	
	<p>F327-PRL</p>					WAA036	4	
2 pole 2 current transformers	<p>F057</p>					WAA037	3	
	<p>F064</p>					WAA037	3	
	<p>F320-PRL</p>					WAA037	3	
2 pole 3 current transformers	<p>F181-PRL</p>					WAA019	5	
	<p>F719</p>					WAA019	5	
2 pole	<p>F059</p>					A038-600	5	
	<p>F172-PRL</p>					A038-620	5	
	<p>F318-PRL</p>					A038-621	5	
2 pole 4 current transformers	<p>F060</p>					WAA039	6	
	<p>F327-PRL</p>					WAA039	6	

























[< back to table of contents >](#)

<sup>1</sup>Connection diagrams for CHR switches on request.















































Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

## Volt-ammeter Switches

Dimensions p. 46

3 phase - phase to phase 3 current	 F101					WAA027	6	
	 F077					WAA028	7	
3 phase voltage 3 phase current 4 wire	 F174-PRL					WAA033	5	
3 phase voltage 3 phase current 3 wire	 F174-PRL					WAA035	5	

## Control Switches

Stop switch	 F022					WAA174	1	
Start switch	 F023					A175-600	1	
Stop start switch single pole	 F024					A176-600	1	
Stop start switch 2 pole	 F024					WAA183	2	
Stop start switch with spring return from start to run	 F119					A178-600	1	
	 F130					A178-620	1	
Stop start switch with spring return to run for 2 units	 F121					WAA177	2	
	 F132					WAA177	2	

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Control Switches

Dimensions p. 46

Stop start switch with spring return to run with contactor interlock contactors for 2 units						WAA182	2	
						WAA182	2	
Motor voltage control switch						WAA150	2	

Control Switches with electrically isolated contacts

Stop start switch 1 pole						A789-600	1	
Stop start switch with spring return to 1						A791-600	1	
Stop start switch with spring return to run for 2 units						WAA790	2	
Contactor control with spring return to „OFF“						WAA179	2	
						WAA179	2	
Circuit breaker control						WAA537	2	

Control and Alarm Switches<sup>1</sup>

With slip clutch and without indicator device						WAA190	5 <sup>2</sup>	
Without indicator device						WAA192	2	

<sup>1</sup>Advise the indicator device, described in Catalog 101, page 9. <sup>2</sup>incl. slip clutch

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Motor Reversing Switches

Dimensions p. 46

2 pole						A400-600	2	
	F071					A400-620	2	
						A400-621	2	
3 pole						A401-600	3	
	F071					A401-620	3	
						A401-621	3	
3 pole with spring return to „OFF“						A228-600	3	
	F025					A228-620	3	
3 pole for use with reversing contactors						WAA402	4	
	F121							

< back to table of contents >

Motor Control Switches

2 speed 2 winding 0-A-BY or Δ						WAA451	3	
	F073					WAA451	3	
3 speed 2 winding 0-AΔ-BY-AY						WAA457	6	
	F109					WAA457	6	

<sup>1</sup>Connection diagrams for CHR switches on request.

Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			

Motor Control Switches

Dimensions p. 46

2 speed single winding						A440-600	4	
						A440-620	4	
2 speed single winding without „OFF“						A466-600	4	
2 speed single winding with center „OFF“						A441-600	4	
						A441-620	4	
2 speed single winding reversing						A442-600	6	
						A442-620	6	
2 speed single winding for use with contactors						WAA444	5	
						WAA444	5	
2 speed reversing for 2 way operation with slip clutch for „OFF“ load use						WAA468	10 <sup>2</sup>	
						WAA468	10 <sup>2</sup>	

[< back to table of contents >](#)





























<sup>1</sup>Connection diagrams for CHR switches on request. <sup>2</sup>incl. slip clutch



Function	Escutch. Plate	Type/Handle				Code	Stages	Connection Diagram <sup>1</sup>
		CG4- CGD4-1	CG6- CHR6	CH10- CHR16	CH10B- CHR16B			



























Star-delta Switches

Dimensions p. 46

OFF-star-delta						A410-600	4	
	F080					A410-620	4	
Reversing						WAA413	5	
With auxiliary contact closed in „OFF“ position						WAA416	5	
For use with reversing contactors						A419-600	4	




[< back to table of contents >](#)

Start and Run Switches

Split-phase start						A425-600	2	
	F119					A425-620	2	
Split-phase start reversing						WAA426	3	
	F120					WAA426	3	
Split-phase reversing auto cutout of start field winding						WAA622	3	

<sup>1</sup>Connection diagrams for CHR switches on request.

<b>Two or Four Hole Panel Mounting</b>	Terminals rotated 90°	<b>Code</b>	CG4-CHR6	CG8-CHR16	CH10B-CHR16B
--	-----------------------	-------------	----------	-----------	--------------

<b>Panel mounting</b>						
	<p>Two hole panel mounting, Protection IP 40</p>	●	E E-V	● ●		
	<p>Two hole panel mounting, Protection IP 66/67/69k</p>	●	EF EF-V	● ●		
	<p>Four hole panel mounting, Protection IP 40</p>	●	E E-V	● ●	● ●	● ●
	<p>Four hole panel mounting, Protection IP 66/67/69k</p>	●	EF EF-V	● ●	● ●	● ●
	<p>Two hole panel mounting, Protection IP 66/67/69k</p>	●	E22 E22-V	● ●		
<b>Panel mounting using larger escutcheon plate and handle and with heavy duty latching</b>						
	<p>Four hole panel mounting, Protection IP 40</p>		EG	●		
	<p>Four hole panel mounting, Protection IP 66/67/69k</p>		EGF	●		

[< back to table of contents >](#)

Two Hole Panel Mounting or Mosaic Mounting	Code	CG4-CHR6
--	------	----------

**Panel mounting with round shaft for combining with commercial radio knobs**



Two hole panel mounting, Protection IP 40  
Shaft diam. 6 mm/.24 inch

E9



Two hole panel mounting, Protection IP 40  
Shaft diam. 6,35 mm/.25 inch

E91



**Mosaic mounting**

For Siemens-Mosaic 30 mm grid depth, Protection IP 40

E92



For Subklew-, Kreutzenbeck-, Symo-Mosaic, Protection IP 40  
28 mm    25 mm    25 mm grid depth

E93



For Mauell-Mosaic 30 mm grid depth, Protection IP 40

E94



< back to table of contents >

<b>Two or Four Hole Panel Mounting</b>	<b>Code</b>	CG8-CHR16	CH10B-CHR16B
--	-------------	-----------	--------------

	<p><b>Panel mounting with heavy duty latching and metal shaft</b></p> <p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size S0</p>	KN2	●	
	<p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size S1</p>	KN1	●	●
	<p>Four hole panel mounting, Protection IP 40 Mounting plate, escutcheon plate and handle of size S1 and 6 mm square metal shaft</p>	KD1	●	●
<p><b>Panel mounting with protective cover</b></p>				
	<p>Four hole panel mounting Protection front IP 40 rear IP 30</p>	EC	CH CHR	●
	<p>Four hole panel mounting with additional shaft seal Protection front IP 65 rear IP 30</p>	ED	CH CHR	●
	<p>Four hole panel mounting Protection front IP 40 rear IP 42</p>	EC1		●
	<p>Four hole panel mounting with additional shaft seal Protection front IP 66/67/69k rear IP 42</p> <p>Two hole panel mounting Protection front IP 66/69k rear IP 42</p>	ED1		●
		ED22	●	

[< back to table of contents >](#)

Single Hole Mounting	Terminals rotated 90°	Code	CG4-CHR6	CG8-CHR16
----------------------	-----------------------	------	----------	-----------

**With locking nut and shaft seal**



Without escutcheon plate,  
Protection IP 66/67/69k



FS1  
FS1-V  
FT1  
FT1-V  
FT3  
FT3-V

mm  
16/22  
16/22

mm  
22  
22  
22/30  
22/30



With square escutcheon plate,  
Protection IP 66/67/69k



FS2  
FS2-V  
FT2  
FT2-V  
FT4  
FT4-V

16/22  
16/22

22  
22  
22/30  
22/30

With size S1 square escutcheon plate  
and heavy duty latching, Protection IP 66/67/69k



FH3  
FH3-V

22  
22



With rectangular escutcheon plate,  
Protection IP 66/67/69k



FS4  
FS4-V  
FT6  
FT6-V

16/22  
16/22

22  
22

With size S1 rectangular escutcheon plate  
and heavy duty latching, Protection IP 66/67/69k



FH4  
FH4-V




22  
22



Mounting key for locking nut

S00 T170 09

Base Mounting	Terminals rotated 90°	Code	CG4- CGD4-1	CG8- CHR16
---------------	-----------------------	------	----------------	---------------

Base mounting					
	<p>Base mounting - four hole, Protection IP 40</p>	●	VE VE-V		● ●
	<p>For four hole base mounting and with integrated simplified door clutch, Protection IP 65</p>	●	VF VF-V		● ●
	<p>For two hole base mounting, Protection IP 40</p>	●	VE22 VE22V		● ●
	<p>For two hole base mounting and with integrated simplified door clutch, Protection IP 65</p>	●	VF22 VF22V		● ●
	<p>Snap-on base mounting for track EN 60715, Protection IP 40</p>		VE1		●
	<p>Snap-on base mounting for track EN 60715, Escutcheon plate can be fastened by screws at the switch, Protection IP 40</p>		VE1E	●	●
	<p>Snap-on base mounting for track EN 60715, Escutcheon plate fastened by single hole mounting at the switch e.g. for combining with key-lock device, Protection IP 66/67/69k</p>		VE1F	●	●

[< back to table of contents >](#)

<b>Base Mounting</b>	<b>Code</b>	CG4- CGD4-1	CG8- CHR16
----------------------	-------------	----------------	---------------

**Base mounting**



Snap-on base mounting for track EN 60715 with rectangular escutcheon plate for 45 mm standard knock-out, Protection IP 40

VE2



Snap-on base mounting for track EN 60715, both the escutcheon plate for 45 mm standard knock-out and the handle are adjustable in height, Protection IP 40

VE21



< back to table of contents >

# Escutcheon Plates



Square and rectangular escutcheon plates are available for each size of switch. The escutcheon plate consists of a frame and a faceplate having the switch positions which is then embossed with hot-foil backing. The escutcheon plate frame is an essential part of the switch and serves as a bearing surface for the handle. If the switch is to be mounted without an escutcheon plate we would recommend for size S1 the handle bearing plate T100-04.

## Standard Letterings Available

(Over 500 standard letterings, special letterings upon request.)

### 30° switching

F022	F141	F158	F703	F023	F137	F142	F159	F701	F704	F152	F709	F026	F035	F153	F169	F024	F143		
F160	F221	F222	F224	F025	F034	F036	F037	F038	F039	F139	F144	F147	F149	F150	F151	F219	F258		
F259	F273	F280	F329	F384	F708	F053	F161	F297	F298	F306	F307	F001	F040	F052	F229	F355	F018		
F019	F029	F030	F154	F155	F165	F166	F183	F184	F301	F302	F321	F332	F333	F334	F335	F343	F353	F374	F711
F712	F002	F021	F033	F041	F055	F305	F319	F054	F003	F042	F138	F255	F299	F308	F353	F350	F351		
F004	F014	F017	F020	F027	F028	F031	F032	F043	F049	F135	F156	F157	F162	F167	F168	F187	F189		
F303	F304	F336	F337	F347	F348	F710	F713	F714	F734	F005	F044	F136	F140	F702	F006	F010	F045		
F015	F050	F007	F011	F046	F008	F012	F047	F016	F051	F009	F013	F048	F748						

### 45° switching

F747	F295	F742	F743	F215	F216	F738	F744	F746	F792	F793	F107	F109	F114	F115	F212	F213	F214
F217	F267	F289	F330	F375	F376	F383	F408	F409	F410	F411	F412	F413	F426	F427	F430	F729	F752
F775	F776	F777	F778	F779	F780	F781	F796	F797	F798	F105	F108	F112	F113	F117	F118	F293	F429
F739	F741	F419	F789	F790	F791	F794	F795	F110	F106	F116	F294	F317	F414	F415	F416	F417	F418
F782	F783	F784	F785	F786	F787	F788	F799	F111	F210	F211	F284	F285	F296	F322	F727	F740	

back to table of contents >



# Escutcheon Plates

## 60° switching

F070	F087	F088	F089	F133	F197	F198	SYNCHROSCOPE	F243	F247	F263	F268	F310	F311	F323	F328	F352	F367
F379	F380	F470	F754	F072	F163	F164	F192	F193	F196	F230	F231	F234	F244	F257	F262	F264	F282
F288	F291	F313	F382	F441	F705	F721	F722	F750	F757	F758	F075	F076	F098	F220	F223	F356	F357
F377	F723	F071	F073	F080	F081	F085	F086	F090	F091	F092	F093	F094	F104	F194	F235	F237	F239
F240	F241	F249	F260	F269	F274	F281	F290	F292	F312	F314	F315	F316	F324	F331	F344	F354	F358
F359	F364	F370	F371	F373	F381	F385	F442	F444	F469	F732	F735	F759	F077	F100	F101	F102	F309
F342	F343	F361	F362	F363	F365	F366	F078	F191	F325	F326	F720	F074	F082	F096	F097	F195	F724
F256	F079	F083	F084	F095	F099	F185	F190	F199	F233	F236	F238	F242	F283	F725	F730	F731	F736
F737																	

## 90° switching

F056	F063	F068	F134	F201	F251	F252	F346	F456	F058	F065	F069	F177	F178	F182	F208	F253	F254
F340	F360	F378	F458	F443	F700	F743	F057	F061	F064	F067	F171	F181	F205	F207	F209	F320	F349
F437	F445	F715	F719	F059	F060	F062	F066	F170	F172	F173	F174	F175	F176	F179	F180	F186	F188
F202	F204	F206	F250	F265	F266	F286	F318	F327	F338	F339	F425	F716	F717	F718	F726	F733	F751
F755	F756																

## Miscellaneous





F119	F130	F122	F126	F125	F129	F225	F248	F246	F261	F341	F345	F287	F123	F127	F145	F146	F148						
F706	F707	F245	F120	F124	F128	F131	F121	F132	F749									F990	F991	F801	F802	F803	F804
F823	F824	F825	F826	F827	F828	F829	F830	F831	F832	F833	F834	F835	F837	F838	F839	F840	F841						





<sup>1</sup>INTERRUPTEUR PRINCIPAL, OUVERTURE EN POSITION 0 <sup>2</sup>INTERRUPTORE GENERALE, APRIRE SOLO CON MANIGLIA SU 0  
<sup>3</sup>INTERRUPTOR PRINCIPAL, ABRIR ARMARIO SOLO EN POS. "0"

# Handles

Type	Color	Code	Size		
			S00	S0	S1
















Type	Color	Code	Size		
			S00	S0	S1

<p>R-Handle</p> 	black red white electro-gray	G001 G002 G003 G007	— — — —	● ● ● ●	● ● ● ●
<p>F-Handle</p> 	black red white electro-gray	G221 G222 G223 G227	● ● ● ●	● ● ● ●	● ● ● ●
<p>S-Handle</p>  <p>S0      S1</p>	black red white electro-gray	G301 G302 G303 G307	— — — —	● ● ● ●	● ● ● ●
<p>P-Handle</p>  <p>S0      S1</p>	black red white electro-gray	G211 G212 G213 G217	— — — —	● ● ● ●	● ● ● ●
<p>O-Handle</p> 	black red white electro-gray	G321 G322 G323 G327	— — — —	— — — —	● ● ● ●

<p>I-Handle</p>  <p>S00      S0, S1</p>	black red white electro-gray	G251 G252 G253 G257	● ● ● ●	● ● ● ●	● ● ● ●
<p>B-Handle</p> 	black red white electro-gray	G521 G522 G523 G527	— — — —	● ● ● ●	● ● ● ●
<p>L-Handle</p> 	black red white electro-gray	G501 G502 G503 G507	— — — —	— — — —	● ● ● ●
<p>K-Handle</p> 	black red white electro-gray	G411 G412 G413 G417	— — — —	— — — —	● ● ● ●

[< back to table of contents >](#)

## International Standards and Approvals

Country	Authority	Mark or Standard					CH6	CH10	CH16	CHR6	CHR10	CHR16
			CG4	CG4-1 CGD4-1	CG6	CG8	CH11 CH12 CH10B	CH16B	CHR11 CHR12 CHR10B	CHR16B		
USA	Underwriters Laboratories	 <sup>1</sup>							●		●	
		 <sup>2</sup> <sub>3</sub>	●	●	●	●	●	●				
Canada	Canadian Standards Association	 <sup>6</sup>	●	CG4-1	●	●	●	●	●	●	●	
		 <sup>1</sup> c							●		●	
		 <sup>2</sup> <sub>3</sub> c	●	●			●	●				
Switzerland	Schweizerischer Elektrotechnischer Verein		+	+	+	+	+	+	+	+	+	
Denmark	Danmarks Elektriske Materielkontrol		+	+	+	+	+	+	+	+	+	
Norway	Norges Elektriske Materielkontrol		+	+	+	+	+	+	+	+	+	
Sweden	Svenska Elektriska Materielkontrollanstalten		+	+	+	+	+	+	+	+	+	
Finland	Sähkötar-kastuskeskus		+	+	+	+	+	+	+	+	+	
Austria	Österreichischer Verband für Elektrotechnik		+	+	+	+	+	+	+	+	+	
Federal Republic of Germany	Verband Deutscher Elektrotechniker	VDE 0660 <sup>4</sup>	+	+	+	+	+	+	+	+	+	
Great Britain	British Standards Institution	BS EN 60947 <sup>4</sup>	+	+	+	+	+	+	+	+	+	
	International Electrical Commission (IEC) Recommendation	IEC 60947 <sup>5</sup>	+	+	+	+	+	+	+	+	+	
China	China Quality Certification Centre	 <sup>3</sup> GB14048.3	●	CG4-1			CH10 CH10B	●	CHR10 CHR10B	●		
Russia Belarus Kazakhstan	Eurasian Conformity		●	● +	●	●	●	●	●	●		
	Germanischer Lloyd		+	+	+	+	+	+	+	+		
	Lloyds Register EMEA		+	+	+	+	CH10 CH10B	●	+	+		

● Switch approved + Switch conforms to requirements

<sup>1</sup> Approved under the "Component Program" (UL-Recognized Industrial Component). File No. E35541, Category Control No. NLRV2 (U.S.) and NLRV8 (Canada) resp. File No. E60262, Category Control Number NRNT2 (U.S.) and NRNT8 (Canada).

<sup>2</sup> Approved under the "Listing Program". File No. E35541, Category Control No. NLRV (U.S.) resp. NLRV7 (Canada).

<sup>3</sup> Switch types CGD4-1, CH11, CH12, CHR11, CHR12 approved under the "Listing Program". File No. E60262, Category Control No. NRNT (U.S.) resp. NRNT7 (Canada).

<sup>4</sup> It is not required for Industrial Switchgear to bear a symbol but must conform to requirements. By stating the specific standard no. on the product the manufacturer declares that all requirements of the product standard are met.

<sup>5</sup> IEC does not operate an approval scheme.

<sup>6</sup> File No. 13002, Class No. 3211-05 resp. 4652-04.

<b>Selection Data</b>	CG4	CG6	CH6	CHR6		
	CG4-1	CG8	CH10 CH10B	CHR10 CHR10B	CH16 CH16B	CHR16 CHR16B

<b>Rated Insulation Voltage <math>U_e</math></b>	IEC 60947-3, EN 60947-3 <sup>1</sup> VDE 0660 part 107 <sup>1</sup>	V	440	690	690	690	690	690	
	SEV max.	V	400	690	–	–	–	–	
	UL/Canada <sup>2</sup>	V	300	300	600	600	600	600	
	CEE 24	V	380	380	–	–	–	–	
	min. voltage	V	on request						
<b>Rated Impulse Withstand Voltage <math>U_{imp}^1</math></b>		kV	4	6	6	6	6	6	
<b>Rated Thermal Current <math>I_u/I_{th}</math></b>	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	10	20	20	20	25	25	
	SEV max.	A	10	20	–	–	–	–	
	UL/Canada	A	10	16	20	20	25	25	
<b>Rated Operational Current <math>I_e</math></b>									
AC-21A	Switching of resistive loads, including moderate overloads	IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	10	20	20	20	25	25
AC-1	Resistive or low inductive loads	SEV 400 V	A	10	–	–	–	–	–
		500 V	A	–	–	–	–	–	–
		600 V	A	–	–	–	–	–	–
AC-22A	Switching of combined resistive or low inductive loads including moderate overloads	IEC 60947-3 220 V-440 V	A	10	20	20	20	25	25
		VDE 0660, 500 V	A	–	20	20	20	25	25
		part 107 660 V-690 V	A	–	16	16	16	25	25
AC-15	Switching of control devices, contactors, valves etc.	IEC 60947-5, EN 60947-5-1 110 V	A	2,5	6	5	5	8	8
		VDE 0660, 220 V-240 V	A	2,5	5	5	5	8	8
		part 200 380 V-440 V	A	1,5	4	4	4	5	5
Pilot Duty	UL/Canada <sup>2</sup> Heavy		A300	A300	A600	A600	A600	A600	
Ampere Rating	UL/Canada <sup>2</sup>	A	10	16 (150 V) 10 (300 V)	20	20	25	25	
Resistive load/Motor load	CEE 24 <sup>2</sup> NEMKO/FI <sup>2</sup>	A	4/2	10/6	–	–	–	–	
		A	6/4 <sup>4</sup>	10/6	–	–	–	–	
<b>Breaking capacity</b>	220 V-240 V	A	50	150	150	150	200	200	
	380 V-440 V	A	50	150	150	150	200	200	
	660 V-690 V	A	–	80	80	80	125	125	
Power loss per contact at $I_u$		W	0,4/0,7	0,8	1,4	1,4	2,3	2,3	
Resistance to vibration					on request				
Resistance to shock					min. 5 g, 30 ms				
<b>Short Circuit Protection</b>									
Max. fuse size	(gG-characteristic)	A	10	25	25	25	35	35	
Rated short-time withstand current	(1s-current)	A	90	140	200	200	250	250	
<b>DC Switching Capacity<sup>6</sup></b>			<b>Rated Operational Current <math>I_e</math></b>						
No. of series contacts	1 2 3 4 5 6 8	A	CG4	CG6	CH6	CHR6			
	Voltage V		CG4-1	CG8	CH10 CH10B	CHR10 CHR10B	CH16 CH16B	CHR16 CHR16B	
Resistive loads $T \leq 1$ ms	24 48 70 95 120 145 190		10	20	20	20	25	25	
	48 95 140 190 240 290 350		6	12	16	12	12	20	
	60 120 180 240 300 360 450		2,5	4,5	8	4,5	4,5	7,5	
	110 220 330 440 550 660 –		0,7	1	2	1	1,5	1,5	
	220 440 660 – – – –		0,3	0,4	0,6	0,4	0,4	0,5	
440 660 – – – –		0,2	0,27	0,35	0,27	0,27	0,3		
Inductive loads $T = 50$ ms	24 48 70 95 120 145 190		6	12	20	12	12	20	
	30 60 90 120 150 180 240		3	5	13	5	9	9	
	48 95 140 190 240 290 350		1	2	6	2	3	3	
	60 120 180 240 300 360 450		0,7	1	3	1	1,5	1,5	
	110 220 330 440 550 660 –		0,3	0,4	1	0,4	0,4	0,5	
<b>Min. Ambient Temperature of Stages</b>			-25 °C (valid only without optional extra)						
<b>Max. Ambient Temperature of Stages<sup>5,7</sup></b>			55 °C during 24 hours with peaks up to 60 °C						
			35 °C during 24 hours with peaks up to 40 °C						

[< back to table of contents >](#)

<sup>1</sup>Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request. <sup>2</sup>International Standards and Approvals, refer to page 35. <sup>3</sup>Valid only for max. 4 simultaneously opening contacts. <sup>4</sup>Valid for CG4 only. <sup>5</sup>For electromagnetic optional extras see additional data in Catalog 101. <sup>6</sup>Values for switches with spring return on request. <sup>7</sup>Storage temperature: -40 °C to 85 °C (in case of temperature below -5 °C no shock load permissible).

<b>Selection Data</b>	CG4	CG6	CH6	CHR6	CH16	CHR16
	CG4-1	CG8	CH10 CH10B	CHR10 CHR10B	CH16B	CHR16 CHR16B

[< back to table of contents >](#)

Rated Utilization Category				IEC 60947-3, EN 60947-3 VDE 0660 part 107							
AC-2	Slip ring motor starting, reversing and plugging, star-delta starting (CG4-CHR10B)	3 phase	220 V-240 V	kW	2,5	4	4	4	5,5	5,5	
		3 pole	380 V-440 V		4,5	7,5	7,5	7,5	11	11	
			500 V		–	10	10	10	15	15	
			660 V-690 V		–	10	10	10	13	13	
AC-3	Direct-on-line starting, star-delta starting (CH16-CHR16B)	3 phase	220 V-240 V	kW	1,5	3	3	3	4	4	
		3 pole	380 V-440 V		2,2	5,5	5,5	5,5	7,5	7,5	
			500 V		–	5,5	5,5	5,5	7,5	7,5	
			660 V-690 V		–	5,5	5,5	5,5	7,5	7,5	
		1 phase	110 V-120 V	kW	0,3	0,6	0,6	0,6	1,5	1,5	
	2 pole	220 V-240 V	0,55		2,2	2,2	2,2	3	3		
		380 V-440 V	0,75		3	3	3	3,7	3,7		
		500 V	–		–	3	3	4	4		
		660 V-690 V	–	–	3	3	3,7	3,7			
AC-4	Direct-on-line starting, reversing, plugging and inching	3 phase	220 V-240 V	kW	0,37	0,55	0,55	0,55	1,5	1,5	
		3 pole	380 V-440 V		0,55	1,5	1,5	1,5	3	3	
			500 V		–	1,5	1,5	1,5	3	3	
			660 V-690 V	–	1,5	1,5	1,5	3	3		
		1 phase	110 V-120 V	kW	0,15	0,3	0,3	0,3	0,45	0,45	
	2 pole	220 V-240 V	0,25		0,75	0,75	0,75	1,1	1,1		
	380 V-440 V	0,5	1,5		1,5	1,5	2,2	2,2			
AC-23A	Frequent switching of motors or other high inductive loads	3 phase	220 V-240 V	kW	1,8	3,7	3,7	3,7	5,5	5,5	
		3 pole	380 V-440 V		3	7,5	7,5	7,5	11	11	
			500 V		–	7,5	7,5	7,5	11	11	
			660 V-690 V	–	7,5	7,5	7,5	11	11		
		1 phase	110 V-120 V	kW	0,37	0,75	0,75	0,75	1,5	1,5	
	2 pole	220 V-240 V	0,75		2,5	2,5	2,5	3	3		
	380 V-440 V	1,1	3,7		3,7	3,7	5,5	5,5			
		500 V	–	–	4	4	5,5	5,5			
		660 V-690 V	–	–	4	4	5,5	5,5			
<b>Ratings</b>	Standard motor load DOL-Rating (similar AC-3)	3 phase	110 V-120 V	HP	0,75	1,5	1,5	1,5	2	2	
		3 pole	220 V-240 V		1	1	3	3	5	5	
			440 V-600 V		–	–	5	5	10	10	
			1 phase	110 V-120 V	HP	0,33	0,5	0,5	0,5	1	1
		2 pole	220 V-240 V	0,75		1	1	1	2	2	
			277 V	0,75		1	2	2	3	3	
			440 V-600 V	–	–	2	2	5	5		
	Heavy motor load Reversing-Rating (similar AC-4)	3 phase	110 V-120 V	HP	–	0,5	0,5	0,5	1	1	
		3 pole	220 V-240 V		–	1	1	1	2	2	
			440 V-600 V		–	–	3	3	5	5	
			1 phase	110 V-120 V	HP	–	0,17	0,17	0,17	0,33	0,33
		2 pole	220 V-240 V	–		0,5	0,5	0,5	0,75	0,75	
		277 V	–	0,5		0,6	0,6	1	1		
		440 V-600 V	–	–	1,5	1,5	2	2			
<b>Max. Permissible Wire Gage</b> - Use copper wire only	Single-core or stranded wire			mm <sup>2</sup>	2x1,5	2x2,5	2x4		2x4		
				AWG	2x14	2x12	2x10		2x10		
	Flexible wire (sleeving in accordance with DIN 46228)			mm <sup>2</sup>	2x1,5(1)	2x2,5(2,5)	2x2,5(2,5)		2x2,5(2,5)		
	Flexible AWG wires (without sleeve)			AWG	2x16	2x14	2x12		2x12		
	Connection with insulated ring and fork type terminals			mm					≥3,6	≥3,6	
	Internal diameter			mm					≤8,6	≤8,6	
	External diameter			mm					6,3	6,3	
Connection with quick connect terminations			mm								

<b>Selection Data</b>	CGD4-1	CH11	CHR11	CH12	CHR12
-----------------------	--------	------	-------	------	-------

<b>Rated Insulation Voltage <math>U_e</math></b>		IEC 60947-3, EN 60947-3 <sup>1</sup> VDE 0660 part 107 <sup>1</sup>	V	440	600	600	600	600		
		North America	V	300	300	300	300	300		
		min. voltage	V	1 <sup>4</sup>	1 <sup>4</sup>	1 <sup>4</sup>	6	6		
<b>Rated Impulse Withstand Voltage <math>U_{imp}</math></b>				on request						
<b>Rated Thermal Current <math>I_U/I_{th}</math></b>		IEC 60947-3, EN 60947-3 VDE 0660 part 107	A	5	6	6	6	6		
		North America	A	5	6	6	6	6		
<b>Rated Operational Current <math>I_e</math></b>		IEC 60947-3, EN 60947-3 VDE 0660 part 107								
AC-21A	Switching of resistive loads, including moderate overloads	North America <sup>2</sup>	1 V/6 V	A	5/2	6/3	6/3	-/6	-/6	
			12 V/24 V	A	1,2/0,7	2/1	2/1	6/5	6/5	
			48 V/60 V	A	0,45/-	0,8/0,7	0,8/0,7	4/3,5	4/3,5	
			110 V	A	0,25	0,4	0,4	3	3	
			240 V	A	0,15	0,2	0,2	1,8	1,8	
			300 V	A	0,13	0,13	0,13	1,3	1,3	
			440 V	A	0,1	0,1	0,1	1	1	
			500 V	A	-	0,08	0,08	0,8	0,8	
				600 V	A	-	0,05	0,05	0,5	0,5
<b>Power loss per contact at <math>I_U</math></b>			W	0,4	0,4	0,4	0,2	0,2		
<b>Short Circuit Protection</b>										
Max. fuse size		(glass-tube, quick)	A	5	6	6	6	6		
Rated short-time withstand current		(1s-current)	A	30	35	35	50	50		
<b>DC Switching Capacity<sup>5</sup></b>		IEC 60947-3, EN 60947-3 VDE 0660 part 107								
DC-21B	Resistive load $T \leq 1$ ms	North America <sup>2</sup>	1 V/6 V	A	3/1,2	4/2,5	4/2,5	-/4	-/4	
			12 V/24 V	A	0,7/0,4	1,5/0,8	1,5/0,8	3/2,2	3/2,2	
			48 V/60 V	A	0,25/0,2	0,3/0,27	0,3/0,27	1,2/1	1,2/1	
			110 V/240 V	A	0,13/0,08	0,2/0,1	0,2/0,1	0,6/0,3	0,6/0,3	
			300 V/440 V	A	0,07/0,05	0,07/0,05	0,07/0,05	0,2/0,15	0,2/0,15	
			500 V/600 V	A	-	0,03/0,02	0,03/0,02	0,1/0,1	0,1/0,1	
<b>Max. Permissible Wire Gage</b> - Use copper wire only										
Single-core or stranded wire			mm <sup>2</sup>	2x1,5	2x4		2x4			
			AWG	2x14	2x10		2x10			
Flexible wire (sleeving in accordance with DIN 46228)			mm <sup>2</sup>	2x1,5(1)	2x2,5(2,5)		2x2,5(2,5)			
Flexible AWG wires (without sleeve)			AWG	2x16	2x12		2x12			
Connection with insulated ring and fork type terminals			mm			≥3,6		≥3,6		
Internal diameter			mm			≤8,6		≤8,6		
External diameter			mm			6,3		6,3		
Connection with quick connect terminations										
<b>Max. Ambient Temperature of Stages</b>				-25 °C (valid only without optional extra)						
<b>Max. Ambient Temperature of Stages<sup>3, 6</sup></b>		open at 100 % $I_U/I_{th}$		55 °C during 24 hours with peaks up to 60 °C						
		enclosed at 100 % $I_{the}$		35 °C during 24 hours with peaks up to 40 °C						

[< back to table of contents >](#)


<sup>1</sup>Valid for lines with grounded common neutral termination, overvoltage category III, pollution degree 3. Values for other supply systems on request. <sup>2</sup>max. 300 V. <sup>3</sup>For electromagnetic optional extras see additional data in Catalog 101. <sup>4</sup>Values for lower voltages on request. <sup>5</sup>Values for switches with spring return on request. <sup>6</sup>Storage temperature: -40 °C to 85 °C (in case of temperature below -5 °C no shock load permissible).

## Tightening torque of screws


Type	Tightening torque	
	Nm	lb-in
CG4	0,6	5
CG4-1	0,6	5
CGD4-1	0,6	5
CG6	0,8	7
CG8	0,8	7
CG8B	0,8	7
CG8R	0,8	7
CG8S	0,8	7
CG8Y	0,8	7
CH6	1,2	10
CH10	1,2	10
CH10-1	1,2	10
CH10-4	1,2	10
CH10-6	1,2	10
CH10B	1,2	10
CH10B-1	1,2	10
CH10B-4	1,2	10
CH10L	1,2	10
CH10R	1,2	10
CH10S	1,2	10
CH10S-6	1,2	10
CH11	1,2	10
CH11B	1,2	10
CH11R	1,2	10
CH12	1,2	10
CH12B	1,2	10
CH16	1,2	10
CH16-4	1,2	10
CH16-6	1,2	10
CH16B	1,2	10
CH16B-1	1,2	10
CH16B-4	1,2	10
CH16S	1,2	10
CHR6	1,4	12
CHR6-1	1,4	12
CHR10	1,4	12
CHR10-1	1,4	12
CHR10B	1,4	12
CHR10L	1,4	12
CHR10M	1,4	12
CHR10R	1,4	12
CHR10S	1,4	12
CHR11	1,4	12
CHR11R	1,4	12
CHR12	1,4	12
CHR16	1,4	12
CHR16B	1,4	12
CHR16L	1,4	12
CHR16S	1,4	12

< [back to table of contents](#) >


**Two or Four Hole Panel Mounting**

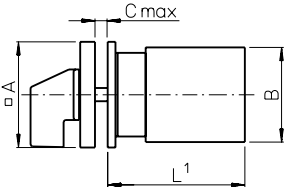


**E**  
for  
CG4-CGD4-1  
CH6/CHR6  
**E-V**  
for  
CG6




**E**  
**E-V**




**E-V**  
for  
CG4-CGD4-1  
CH6/CHR6  
**E**  
for  
CG6




	CG4 CG4-1 CGD4-1	CG6	CG8	CH6 CHR6	CH10- CHR16	CH10B- CHR16B
<b>A</b>	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52
<b>B</b>	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20
<b>C</b>	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16
<b>D1</b>	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20
<b>D2</b>	8-11 .31-.43	8-11 .31-.43	8-19 .31-.75	8-19 .31-.75	8-19 .31-.75	10-22 .39-.87
<b>E</b>	-	-	36 1.42	-	36 1.42	48 1.89




**EF**  
for  
CG4-CGD4-1  
CH6/CHR6  
**EF-V**  
for  
CG6




**EF**  
**EF-V**




**EF-V**  
for  
CG4-CGD4-1  
CH6/CHR6  
**EF**  
for  
CG6




	CG4 CG4-1 CGD4-1	CG6	CG8	CH6 CHR6	CH10- CHR16	CH10B- CHR16B
<b>A</b>	30 1.18	30 1.18	48 1.89	30 1.18	48 1.89	64 2.52
<b>B</b>	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	56 2.20
<b>C</b>	4 .16	4 .16	4 .16	4 .16	4 .16	4 .16
<b>D1</b>	3,2 .13	3,2 .13	5 .20	3,2 .13	5 .20	5 .20
<b>D2</b>	8-11 .31-.43	8-11 .31-.43	15-19 .59-.75	8-11 .31-.43	15-19 .59-.75	19-22 .75-.87
<b>E</b>	-	-	36 1.42	-	36 1.42	48 1.89
<b>M</b>	1 .04	1 .04	-	1 .04	-	-



**E22**  
for  
CG  
**E22-V**  
for  
CH/CHR



**E22-V**  
for  
CG  
**E22**  
for  
CH/CHR



	CG8	CH10- CHR16
<b>A</b>	48 1.89	48 1.89
<b>B</b>	38 1.50	46 1.81
<b>C</b>	4 .16	4 .16
<b>D1</b>	5 .20	5 .20
<b>E</b>	30 1.17	30 1.17



[< back to table of contents >](#)



**Dimensions** mm  
inch



**Four Hole Panel Mounting or Mosaic Mounting**

**EG  
EGF**




	CG8	CH10-CHR16
<b>A</b>	64 2.52	64 2.52
<b>B</b>	38 1.50	46 1.81
<b>C</b>	4 .16	4 .16
<b>D1</b>	5 .20	5 .20
<b>EG D2</b>	10-22 .39-.87	10-22 .39-.87
<b>EGF D2</b>	19-22 .75-.87	19-22 .75-.87
<b>E</b>	48 1.89	48 1.89
<b>M</b>	6,7 .26	6,7 .26


**E9  
E91**





for  
CG4-CGD4-1  
CH6/CHR6



for  
CG6





**E92**

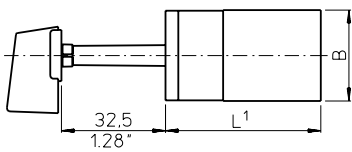

CG4  
CG4-1  
CGD4-1 CG6 CH6  
CHR6

<b>B</b>	28 1.10	38 1.50	46 1.81
----------	------------	------------	------------

**E93  
E94**

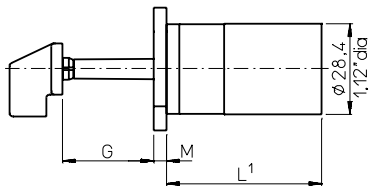

CG4  
CG4-1  
CGD4-1  
CG6  
CH6  
CHR6

	E9	E91	E92	E93	E94
<b>D</b>	6 .24	6,35 .25	-	-	-
<b>F</b>	12 .47	12,8 .50	-	-	-
<b>G</b>	15,4 .61	17,4 .69	32,5 1.28	28,5 1.12	32,5 1.28
<b>K</b>	4,7 .19	5,5 .22	-	-	-
<b>M</b>	-	-	-	4 .16	-

< back to table of contents >

<sup>1</sup>see page 46



**Two or Four Hole Panel Mounting**

		CG8	CH10-CHR16	CH10B-CHR16B
		ED22	EC ED	EC1 ED1
<b>A</b>		48	64	48
		1.89	2.52	1.89
<b>B</b>		74	68	74
		2.91	2.68	2.91
<b>C</b>		-	4	-
		-	.16	-
<b>C</b>		4	4	4
		.16	.16	.16
<b>D1</b>		5	5	5
		.20	.20	.20
<b>D2</b>		-	10-19	-
		-	.39-.75	-
<b>D2</b>		11-15	19-22	11-15
		.43-.59	.75-.87	.43-.59
<b>E</b>		-	48	-
		-	1.89	-
<b>F</b>		30	-	30
		1.17	-	1.17
<b>M</b>		1.5	-	1.5
		.06	-	.06
<b>1</b>		74,3	-	74,3
		2,93	-	2,93
<b>2</b>		74,3	-	74,3
		2,93	-	2,93
<b>3</b>		94,3	-	94,3
		3,71	-	3,71
<b>4</b>		94,3	104	94,3
		3,71	4,10	3,71
<b>5</b>		94,3	-	127
		3,71	-	5,00
<b>6</b>		-	-	139,5
		-	-	5,49
<b>7</b>		-	-	164,5
		-	-	6,48
<b>8</b>		-	-	177
		-	-	6,97
<b>9</b>		-	-	-
		-	-	-
<b>10</b>		-	-	-
		-	-	-

< back to table of contents >

**Four Hole Panel Mounting or Single Hole Mounting**

**KN1  
KD1  
KN2**




	<b>KN2</b>	
	CG8	CH10-CHR16
<b>A</b>	48 1.89	48 1.89
<b>B</b>	38 1.50	46 1.81
<b>C</b>	4 .16	4 .16
<b>D1</b>	5 .20	5 .20
<b>D2</b>	8-15 .31-.59	8-15 .31-.59
<b>E</b>	36 1.42	36 1.42
<b>M</b>	5.2 .20	5.2 .20


	<b>KN1</b>		
	<b>KD1</b> CG8	CH10-CHR16	CH10B-CHR16B
<b>A</b>	64 2.52	64 2.52	64 2.52
<b>B</b>	38 1.50	46 1.81	56 2.20
<b>C</b>	4 .16	4 .16	4 .16
<b>D1</b>	5 .20	5 .20	5 .20
<b>D2</b>	10-22 .39-.87	10-22 .39-.87	10-22 .39-.87
<b>E</b>	48 1.89	48 1.89	48 1.89
<b>M</b>	4.7 .19	4.7 .19	7 .28

< back to table of contents >



**FS1...  
FT1...  
FT3...**




**FH3...  
FS2...  
FT2...  
FT4...**




**FH4...  
FS4...  
FT6...**






**FS1...  
FS2...  
FS4...**



**FH3...  
FH4...  
FT1...  
FT2...  
FT6...**



**FT3...  
FT4...**




	<b>CG4</b>		<b>CG6</b>	<b>CG8</b>	<b>CH6</b> CHR6	<b>CH10-CHR16</b>
	<b>CG4-1</b> CGD4-1					
<b>A/E</b>	30 1.18	30 1.18	48 1.89	48 1.89	30 1.18	48 1.89
<b>FH3...</b>	-	-	64 2.52	-	-	64 2.52
<b>FH4...</b>	-	-	64 2.52	-	-	64 2.52
<b>B</b>	28 1.10	38 1.50	38 1.50	46 1.81	46 1.81	46 1.81
<b>C</b>	5 .20	5 .20	6 .24	5 .20	6 .24	6 .24
<b>D</b>	29.5 1.16	29.5 1.16	39 1.54	29.5 1.16	39 1.54	39 1.54
<b>F</b>	39 1.54	39 1.54	59 2.32	39 1.54	59 2.32	39 1.54
<b>FH4...</b>	-	-	78.5 3.09	-	78.5 3.09	-
<b>M</b>	12.5 .49	12.5 .49	18.2 .72	12.5 .49	18.2 .72	18.2 .72
<b>FH3...</b>	-	-	25.2 .99	-	25.2 .99	-
<b>FH4...</b>	-	-	25.2 .99	-	25.2 .99	-


<sup>1</sup>see page 46

**Base Mounting**


**VE  
VE-V**

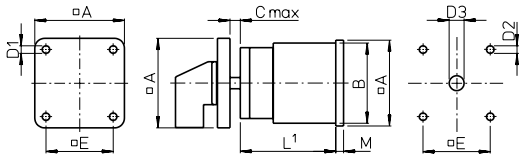


**VF  
VF-V**

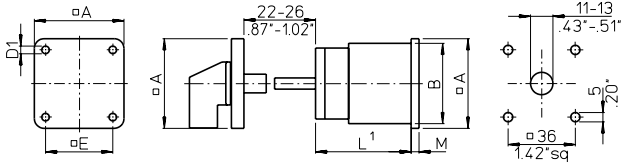

**VE22  
VE22V**

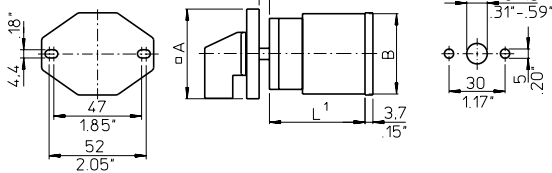


**VF22  
VF22V**

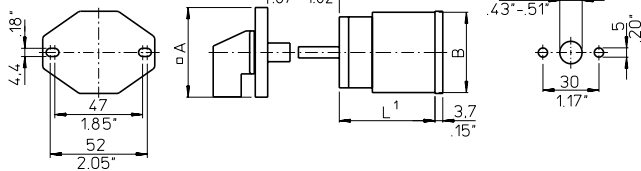


	CG8	CH10-CHR16
<b>A<sup>2</sup></b>	48 1.89	48 (64) 1.89 (2.52)
<b>B</b>	38 1.50	46 1.81
<b>C</b>	10,5 .41	10,5 .41
<b>D1</b>	4,1 .16	4,1 .16
<b>D2</b>	5 .20	5 .20
<b>D3</b>	8-15 .31-.59	8-15 .31-.59
<b>E<sup>2</sup></b>	36 1.42	36 (48) 1.42 (1.89)
<b>M</b>	2,2 .09	5,2 .20

<sup>2</sup>Dimensions in ( ) for reverte mounting plate


**VE1**

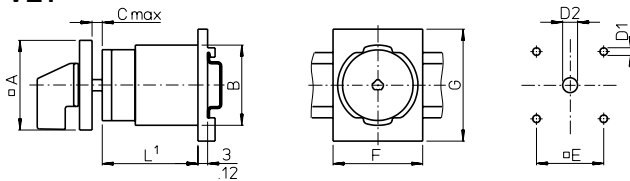

**VE1E**

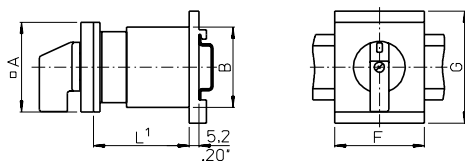

**VE1F**

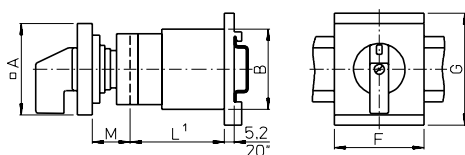


	CG4 CG4-1 CGD4-1	CG8	CH10-CHR16
<b>A</b>	30 1.18	48 1.89	48 1.89
<b>B</b>	28 1.10	38 1.50	46 1.81
<b>C</b>	-	10,5 .41	10,5 .41
<b>D1</b>	-	5 .20	5 .20
<b>D2</b>	-	8-15 .31-.59	8-15 .31-.59
<b>E</b>	-	36 1.42	36 1.42
<b>F</b>	35,5 1.40	48 1.89	48 1.89
<b>G</b>	60 2.36	60 2.36	60 2.36
<b>M</b>	12,5 .49	20 .79	20 .79

<sup>1</sup>see page 46


**Base Mounting and Escutcheon Plates**

**VE2**

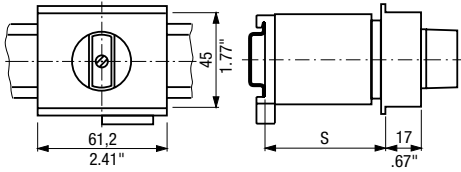


**VE21**

for CG4-CGD4-1

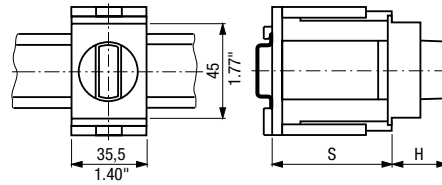


**VE3**

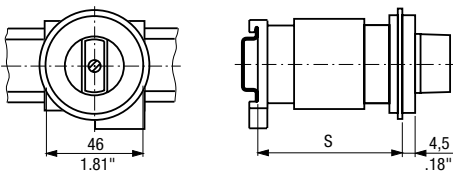


**VE21**

for CG8-CHR16

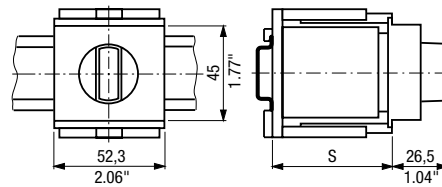

**VE4**

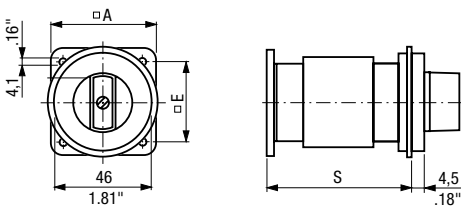


< back to table of contents >

	VE2		VE3		VE4	
	CG8	CH10-CHR16	CG8	CH10-CHR16	CG8	CH10-CHR16
	Max. no. of stages		Max. no. of stages		Max. no. of stages	
<b>S</b> = 46 1.81	1	1	-	-	1	-
<b>S</b> = 50 1.97	2	2	1	1	1	-
<b>S</b> = 61 2.40	3	2	2	1	2	1
<b>S</b> = 67 2.64	3	3	2	2	2	2
<b>S</b> = 69 2.70	3	3	2	2	2	2
<b>A</b>					48 1.89	64 2.52
<b>E</b>					36 1.42	48 1.89

VE21		CG4-CGD4-1	CG8	CH10-CHR16
<b>S<sub>min.</sub></b>	<b>H</b>			
44 1.73	21 .83	1	1	1
46 1.81	26,5 1.04	2	2	-
50 1.97	-	-	-	2
54 2.13	-	-	-	-
60 2.36	-	-	3	-
62 2.44	26,5 1.04	3	-	-
64 2.52	-	-	-	3
72 2.83	-	-	4	-

**Escutcheon plates for mounting E, EF, EG, EGF, KN1, KD1, KN2, EC, EC1, ED, ED1, VE, VE1, VF**

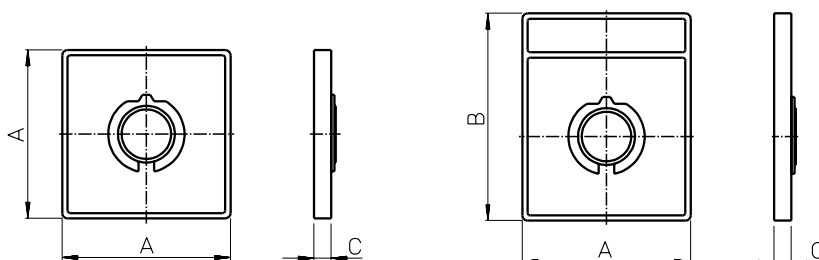

Size	A	B	C
<b>S00</b>	30 1.18	39 1.54	5,5 .22
<b>S0</b>	48 1.89	59 2.32	6,7 .26
<b>S1</b>	64 2.52	78 3.07	7,4 .29

**Additional Lengths**

**Additional lengths for amendment (page 6)**

	CG8	CH10 CH16	CHR10 CHR16
<b>B</b>	6,2 .24	6,2 .24	6,2 .24
<b>S</b>	17,3 .68	17,3 .68	17,3 .68
<b>L, M</b>	24,8 .98	24,8 .98	24,8 .98
<b>X</b>	23,3 .92	23,3 .92	23,3 .92

**Quick connect terminations (plug 2,8 mm or 6,35 mm) for CH switches (page 6)**

with quick connects


with angled quick connects

**Length L**

Stages	CG4		CG8	CH6 CHR6	CH10	CHR10	CH10B CH16B	CHR10B
	CG4-1 CGD4-1	CG6			CH11 CH12 CH16	CHR11 CHR12 CHR16		CHR10B CHR16B
<b>1</b>	38,5	43,2	40,7	46	43,5	43,5	48,9	48,9
	1.52	1.70	1.60	1.81	1.71	1.71	1.93	1.93
<b>2</b>	50,5	55,9	53,4	60	57,5	57,5	62,9	62,9
	1.99	2.20	2.10	2.36	2.26	2.26	2.48	2.48
<b>3</b>	62,5	68,6	66,1	74	71,5	71,5	76,9	76,9
	2.46	2.70	2.60	2.91	2.81	2.81	3.03	3.03
<b>4</b>	74,5	81,3	78,8	88	85,5	85,5	90,9	90,9
	2.93	3.20	3.10	3.46	3.37	3.37	3.58	3.58
<b>5</b>	86,5	-	91,5	-	99,5	99,5	104,9	104,9
	3.41	-	3.60	-	3.92	3.92	4.13	4.13
<b>6</b>	98,5	-	104,2	-	113,5	113,5	118,9	118,9
	3.88	-	4.10	-	4.47	4.47	4.68	4.68
<b>7</b>	110,5	-	116,9	-	127,5	127,5	132,9	132,9
	4.35	-	4.60	-	5.02	5.02	5.23	5.23
<b>8</b>	122,5	-	129,6	-	141,5	141,5	146,9	146,9
	4.82	-	5.10	-	5.57	5.57	5.78	5.78
<b>9</b>	-	-	142,3	-	155,5	155,5	160,9	160,9
	-	-	5.60	-	6.12	6.12	6.34	6.34
<b>10</b>	-	-	155	-	169,5	169,5	174,9	174,9
	-	-	6.10	-	6.67	6.67	6.89	6.89
<b>11</b>	-	-	167,7	-	183,5	183,5	188,9	188,9
	-	-	6.60	-	7.22	7.22	7.44	7.44
<b>12</b>	-	-	180,4	-	197,5	197,5	202,9	202,9
	-	-	7.10	-	7.77	7.77	7.99	7.99

< back to table of contents >

**Notes:**

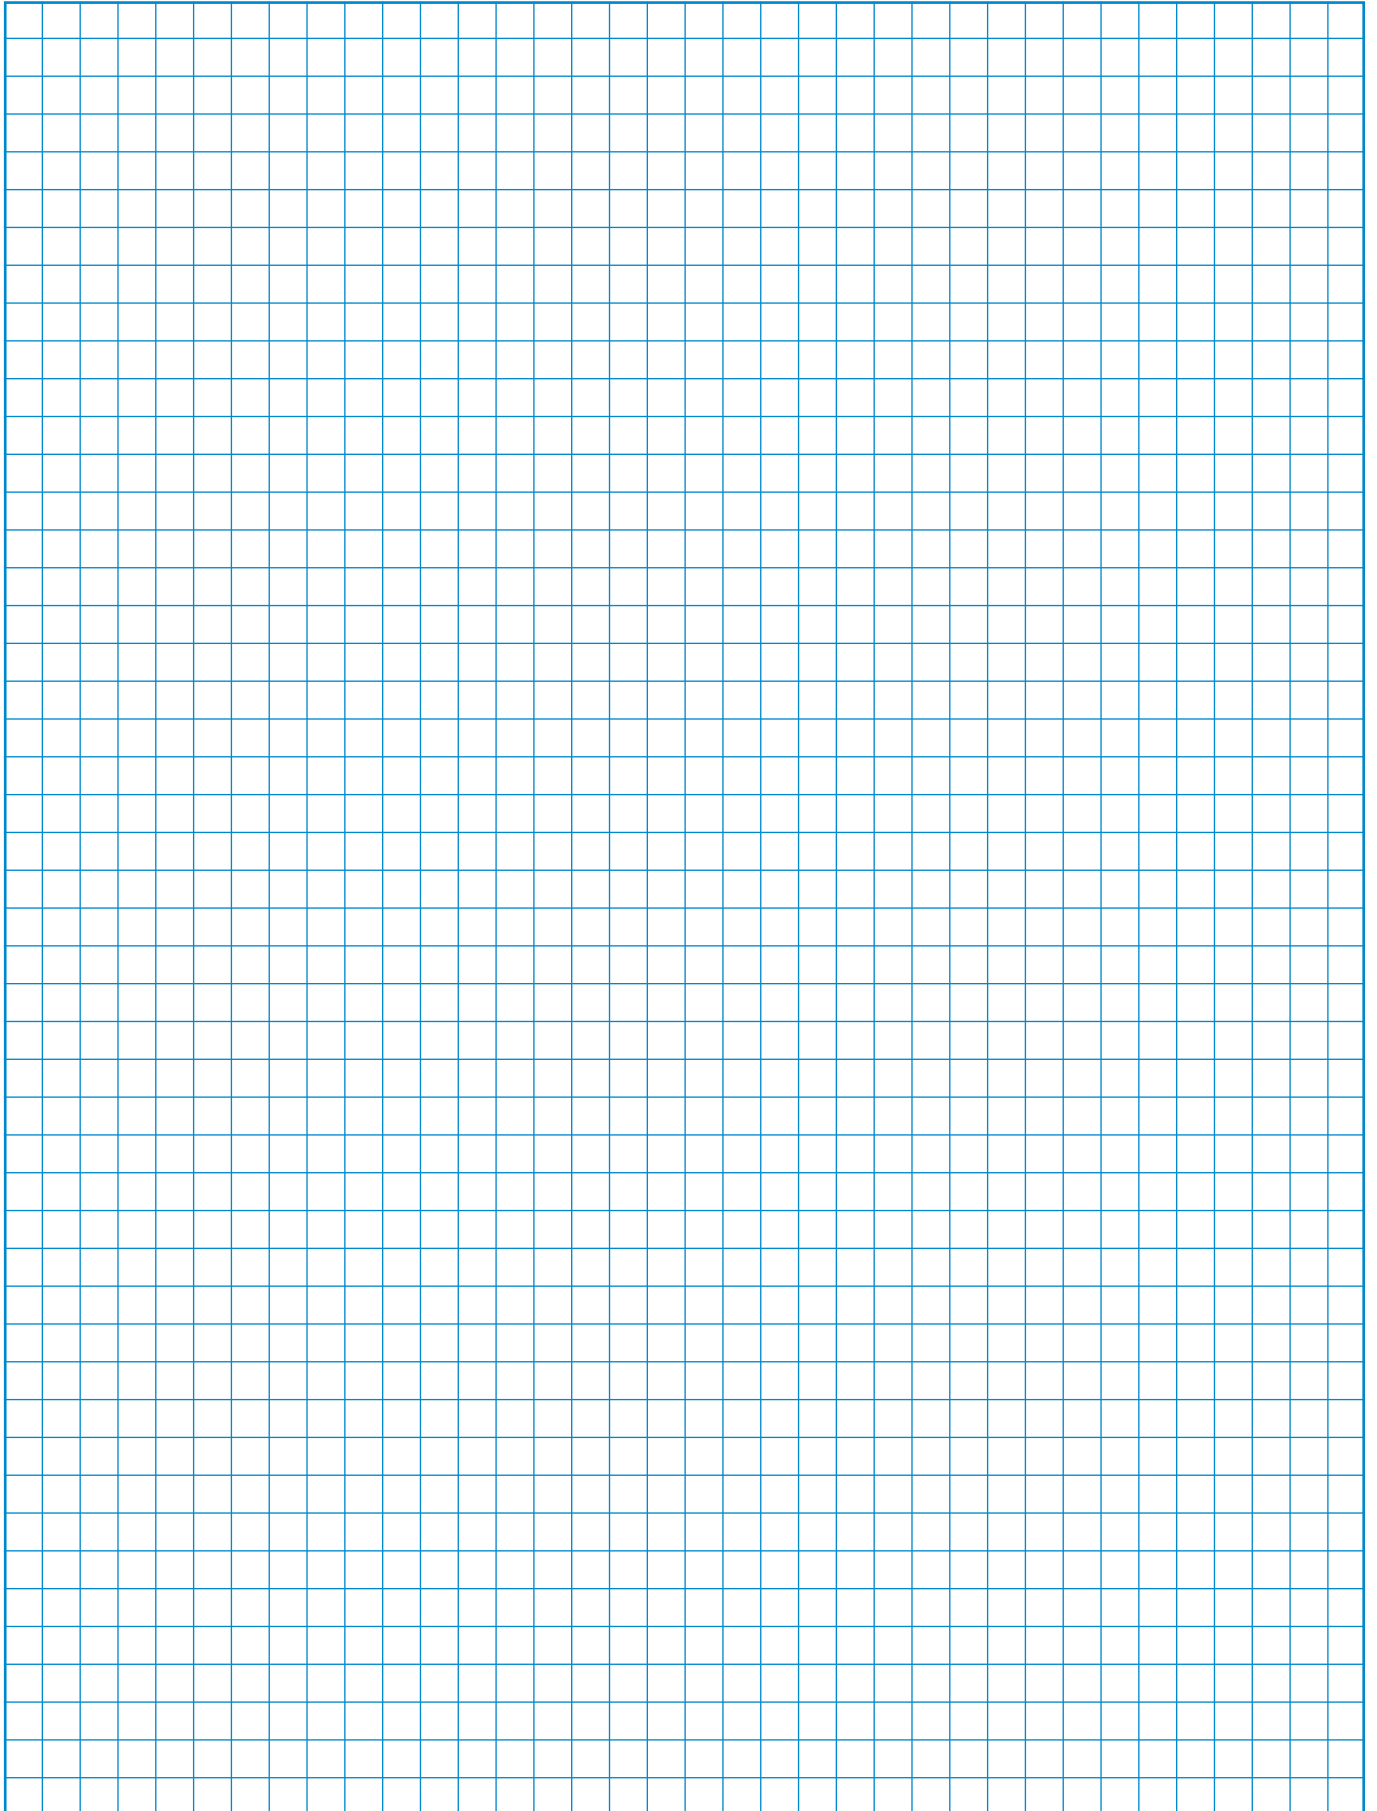

---

# The Range of “Blue Line” Switchgear

Technical literature covering the following products is available on request.

	<b>Catalog Number</b>
<b>Main Switches and Main Switches with Emergency Function 16 A-315 A</b> <b>Maintenance Switches 20 A-315 A</b> <b>Switch Disconnectors 20 A-315 A</b> According to IEC 60947-3, EN 60947-3, VDE 0660 part 107, IEC 60204, EN 60204 and VDE 0113	<b>500</b>
<b>CL Switches 10 A-20 A</b> <b>C, CA and CAD Switches 10 A-315 A and L Switches 350 A-2400 A</b> C, CA and CAD switches are designed for universal application. They are recommended for instrument, isolator, double-throw and motor control. L switches are designed for load and off-load applications. They are used to switch resistive or low inductive loads.	<b>100</b>
<b>Optional Extras and Enclosures</b> The complete product line, a large number of optional extras is available, including door interlocks, push-pull devices, cylinder and padlock attachments, control and indicator devices, AC motor drives, as well as enclosures, both insulated and metal.	<b>101</b>
<b>A and AD Switches 6 A-25 A</b> A and AD switches have 4 contacts in each switching stage. These switches provide an extensive range of switch functions and require a minimum mounting depth. Up to 24 switching positions are possible, with availability of 48 contacts per 12 stage switch column.	<b>110</b>
<b>CG, CH and CHR Switches 10 A-25 A</b> Ultra compact CG, CH and CHR switches are ideally suited for control and instrumentation applications. Switch terminals are “finger-proof” and conveniently accessible for wiring and are delivered open. All CG4 switches offer specially designed gold plated contacts or H-bridges with “cross-wire” contact systems, which facilitates their use in electronic circuitry and chemically aggressive environments.	<b>120</b>
<b>DH, DHR, DK and DKR Switches 6 A-16 A</b> DH, DHR, DK and DKR switches incorporate unique corrosion resistant contacts that permit operation on system voltage as low as 1 V. They have fully enclosed and protected contacts which can be operated either by rotary and/or lateral handle movement. D switches are used in calibration and semiconductor circuits. They are also used for relay and contactor control.	<b>130</b>
<b>X Switches 200 A-630 A</b> X switches can be applied for load, tap and gang switching duties. They incorporate 6 contacts in each switching stage. Their compact design provides a minimum length dimension for mounting purposes.	<b>140</b>
<b>KG Switches 20 A-315 A and KH and KHR Switches 16 A-80 A</b> KG, KH and KHR switches are excellent circuit interruptors. They have high through fault and fault making capacities and are especially designed for use as isolators and safety switches for machine tools, distribution panels and switchboards. KG ON/OFF switches offer unusually high dimensioned air and creepage distances between terminals which are designed for time saving “straight-line” wiring. ON/OFF switches are available with up to 8 poles and double-throw switches are available with up to 4 poles.	<b>150</b>
<b>Push Buttons and Pilot Lights, 22,5 mm Ø</b> A complete range of state-of-the-art push buttons and pilot lights represent an ideal combination of functional security and economical efficiency in a modular design.	<b>302</b>



## SALES AND SERVICE ORGANIZATION

---

### Australia

Kraus & Naimer Pty. Ltd.  
379 Liverpool Road, ASHFIELD, N.S.W. 2131  
Tel: +61 2 9797-7333, Fax: 0092  
salesaus@krausnaimer.com

### Austria

Kraus & Naimer GmbH  
Schumanngasse 35  
1180 WIEN  
Tel: +43 1 404 06-0, Fax: 404 06-190  
aso@krausnaimer.com

### Belgium, Luxembourg

Kraus & Naimer B.V.  
Ikaros Business Park  
Ikaroslaan 2  
1930 ZAVENTHEM  
Tel: +32 2 757-0141, Fax: 1640  
sales.be@krausnaimer.com

### Brazil

Central and South America  
Kraus & Naimer Ind. Com. Ltda.  
Rua Santa Monica, 1061  
Parque Industrial San Jose  
06715-865 Cotia - SP  
Tel: +55 11 2198-1288, Fax: 1251  
knbrasil@krausnaimer.com.br

### Canada

Kraus & Naimer Ltd.  
219 Connie Crescent, Unit: 13A  
CONCORD, Ontario, L4K 1L4  
Tel: +1 905 738-1666, Fax: 9327  
salescan@krausnaimer.com

### Cyprus

ELECTROMATIC CONSTRUCTIONS LTD.  
72, Evagoras Pellikarides Str., 2235 LATSIA-Nicosia  
P. O. Box 12630, 2251 LATSIA-Nicosia  
Tel: +357 2 48 41 41, Fax: 48 57 47

### Czech Republic

OBZOR, výrobní družstvo Zlín  
Na Slanici 378  
76413 ZLÍN  
Tel: +420 57 7195-111/-153 (Techn. Supp.)  
Fax: +420 57 7195-152/-138  
ots@obzor.cz

### Denmark

THIIM A/S  
Transformervej 31  
2730 HERLEV  
Tel: +45 4485 8000, Fax: 8005  
thiim@thiim.com

### Finland

Kraus & Naimer Oy  
Kiitoradankuja 8  
01530 VANTAA  
Tel: +358 9 825-424-0, Fax: 424-10  
myynti@krausnaimer.com

### France

Kraus & Naimer s.a.s.  
33, rue Bobillot  
75013 PARIS  
Tel: +33 1 58 40 80 80, Fax: 45 80 91 19  
ventes@krausnaimer.com

### Germany

Kraus & Naimer GmbH  
Wikingerstraße 20-28, 76189 KARLSRUHE  
Postfach 10 01 24, 76231 KARLSRUHE  
Tel: +49 721 59 88-0, Fax: 59 28 28  
sales.ger@krausnaimer.com

### Great Britain

Kraus & Naimer Ltd.  
115 London Road  
NEWBURY/BERKSHIRE RG14 2AH  
Tel: +44 1635 262626, Fax: 37807  
sales-uk@krausnaimer.com

### Greece

KALAMARAKIS-SAPOUNAS S. A.  
Ionias & Neromilou Str., P. O. Box 46566  
13671 ACHARNES/ATHENS  
Tel: +30 2 10 240-6000-6, Fax: 240-6007  
kalamarakis.sapounas@ksa.gr

### Hungary

GANZ, Schalter- u. Gerätefabrik  
X. Kőbányai út 41/c, Postfach 87  
1475 BUDAPEST  
Tel: +36 1 261-5479, Fax: 4685  
ganzkk@ganzkk.hu

### Iceland

JOHAN RÖNNING LTD.  
Klettagarðar 25  
104 REYKJAVÍK  
Tel: +354 5200 800  
ronning@ronning.is

### India

BLISS ELECTRICALS Pvt. Ltd.  
SA42 A&B, 2nd Flr, Lake City Mall,  
Kapurbavdi Junction,  
THANE (W) - 400 607  
Tel: +91-22-25368609  
kane.shriram@blisselectricals.com

### Republic of Ireland

Kraus & Naimer Ltd.  
4235 Atlantic Avenue  
Westpark Business Campus  
Shannon, Co. Clare  
Tel: +353 61 704700, Fax: 471084  
sales-ie@krausnaimer.com

### Italy

Kraus & Naimer s.r.l.  
Via Terracini, 9  
24047 TREVIGLIO (BG)  
Tel: +39 0363-30 11 12, Fax: 30 21 13  
SalesItaly@krausnaimer.com

### Japan

Kraus & Naimer Ltd.  
Yoshiwada Building 2F  
1-11-6 Hamamatsucho  
Minato-Ku, TOKYO 105-0013  
Tel: +81 3 3436-6151, Fax: 6325  
sales-jpn@krausnaimer.com

### Mexico

JC Ingeniería y Control, SA de CV.  
Ángel Gaviño 30.  
C. Satélite, C. Medicos,  
Naucalpan Edo. de Mexico, C.P. 53100  
Tel. (+52 55) 55 62 75 77, Fax. 55 62 04 34  
ventas@jcingenieraycontrol.com

### Middle East - UAE

Branch Office, Kraus & Naimer Pte. Ltd.  
SAIF Zone, P. O. Box 121607,  
Sharjah, UAE  
Tel: +971 6 557 8886  
Fax: +971 6 557 8088  
uae@krausnaimer.com

### Netherlands

Kraus & Naimer B.V.  
Wegtersweg 38-40, Postbus 199  
7556 BR HENGEL0 (Ov.)  
Tel: +31 74 291-9441, Fax: 8380  
sales.nl@krausnaimer.com

### New Zealand

Kraus & Naimer Ltd.  
42 Miramar Avenue, WELLINGTON 6022  
P. O. Box 15-009, WELLINGTON 6243  
Tel: +64 4 380-9888, Fax: 9877  
sales-nz@krausnaimer.com

### Norway

Kraus & Naimer AS  
Hjalmar Brantings vei 8, P. O. Box 21, Økern  
0508 OSLO  
Tel: +47 22 64 44 20, Fax: 65 39 49  
ordre.no@krausnaimer.com

### Poland

ASTAT sp. z o.o.  
ul. Dąbrowskiego 461  
60451 POZNAN  
Tel: +48 61 848-8871/72, Fax: 8276  
info@astat.com.pl

### Portugal

ELECTRICOL-DAMAS, FERREIRA & DAMASCENO, LDA.  
Apartado 1063, S. Ant. Cavaleiros  
2670 LOURES  
Tel: +351 21 989-8939, Fax: 988-6464  
electrical@electricol.pt

### Singapore

Kraus & Naimer Pte. Ltd.  
Blk 115A, Commonwealth Drive  
#03-17/23  
SINGAPORE 149 596  
Tel: +65 6473-8166, Fax: 8643  
sgp@krausnaimer.com

### Slovenia

SCHRACK Technik d.o.o.  
Pameče 175  
2380 Slovenj Gradec  
Tel: +386 2 883 92 00, Fax: +386 2 884 34 71  
m.abeln@schrack.si

### Republic of South Africa

Kraus & Naimer Pty. Ltd.  
7 Village Crescent, Linbro Village  
Linbro Business Park, SANDTON 2065  
P. O. Box 511, KELVIN 2054  
Tel: +27 11 608-6060, Fax: 608-2874  
salesZAF@krausnaimer.com

### Spain

Kraus & Naimer B.V.  
Tel: +34 662 696 014  
sales.es@krausnaimer.com

### Sweden

Kraus & Naimer AB  
Dr. Widerströms Gata 11, FRUÅNGEN  
Box 42097, 126 14 STOCKHOLM  
Tel: +46 8 97 00 80, Fax: 97 87 33  
order.se@krausnaimer.com

### Switzerland

AWAG Elektrotechnik AG  
Sandbühlstraße 2, Postfach  
8604 VOLKETSCHWIL  
Tel: +41 44 908 19 19, Fax: 19 99  
info@awag.ch, www.awag.ch

### Turkey

KARDEŞ ELEKTRİK SANAYİ VE TİCARET ANONİM ŞİRKETİ  
Beşyol, Eski Londra Asfaltı-6  
34295 İSTANBUL-Sefaköy  
Tel: +90 212 624-9204, Fax: 592-4810  
info@unalkardes.com.tr

### USA

Kraus & Naimer Inc.  
760 New Brunswick Road  
SOMERSET, NJ 08873  
Tel: +1 732 560-1240, Fax: 8823  
salesusa@krausnaimer.com



Kraus & Naimer

BLUE LINE switchgear



Contact us:

[www.krausnaimer.com](http://www.krausnaimer.com)