

IC-F29SR Licence-free Radio Features



Easy to Use

This simple to use radio is ideal for high turnover environments and shift work where the radio is constantly passed from person to person.



Easy to Hear

The large 36mm speaker of the radio provides clear compounded 800 mW* audio to a radio operator working in noisy environments.

* Typical with internal speaker.



Rotary Channel

16-position rotary channel knob can be programmed with operating channels and group code. The radio announces the channel number, when you rotate it.



Call-Ring

The Call-Ring function can be used to call receivers with a ringer tone. Ten different ring patterns can be selected.



Answer Back

The Smart-Ring function checks whether the receiver is in communication range with a ringer sound.



Private Conversation

The built-in inversion voice scrambler provides private conversation. Up to 16 codes are selectable.



21 Hours Operation

The supplied Li-Ion battery pack, BP-279, provides up to 21 hours of operating time. The supplied rapid charger BC-213 charges the BP-279 in 2.5 hours.



Group Call

The user programmable CTCSS and DTCSS codes can be used for group call. You will only send a call to specified group members using the same tone and same channel.

Other Features

- Low battery alert
- Monitor function
- Surveillance function
- Microphone gain level adjustment
- Three programmable buttons

- Time-out-timer function
- Siren alarm function
- Key lock function
- Power on scan function
- PC programmable

Specifications

- Frequency coverage: 446.00625–446.09375MHz (8 channels)
 - Output power: 500mW (ERP)
 - Audio output power: Internal speaker 800mW typ. (with 12Ω load)
External speaker 400mW typ. (with 8Ω load)
(at 5% distortion)
 - Dimensions : 52.2 (W) × 186.1 (H) × 24.5 (D) mm (with BP-279)
 - Weight: 240g (with BP-279)
 - Communication range*: Approx. 8km (Wide open space)
 - Operating temperature: -25°C to +55°C
 - IP rating: IP67 (Dust-tight and waterproof protection)
 - Military standard: MIL-STD-810-G
 - * Communication range may differ depending on operating environment or weather conditions, etc.
- All stated specifications are subject to change without notice or obligation.**

Supplied Accessories



AC adapter
BC-123SE/SUK*



Rapid charger
BC-213



Battery pack
BP-279



Belt clip
MB-133

(* May differ depending on version)

Batteries & Charger Options



BP-278

BP-279

Battery packs	Type and capacity	Operating time*	Description
BP-278	Li-Ion, 7.2V 1130mAh	16 hours (Approx.)	Slim type
BP-279	Li-Ion, 7.2V 1485mAh	21 hours (Approx.)	Same as supplied

* Tx: Rx: standby = 5 : 5 : 90 duty cycle. Power save ON.



Multi-charger
BC-214
Rapidly charges up to six transceivers and/or battery packs at the same time.



OPC-656
For use with BC-214.



CP-23L
For use with BC-213.



MB-130
For use with BC-213.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United Kingdom, Germany, France, Spain, Japan and/or other countries.

Icom Inc. www.icom.co.jp/world

Count on us!

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24, 65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0 E-mail : info@icom-europe.com
Fax : +49 (6196) 76685-50 URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer" Bajos A 08174,
Sant Cugat del Valles, Barcelona, Spain
Phone : +34 (93) 590 26 70 E-mail : icom@icomspain.com
Fax : +34 (93) 589 04 46 URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Blacksole House, Altra Park, Herne Bay, Kent, CT6 6GZ, U.K.
Phone : +44 (0) 1227 741741 E-mail : info@icomuk.co.uk
Fax : +44 (0) 1227 741742 URL : <http://www.icomuk.co.uk>

Icom France s.a.s.

Zac de la Plaine, 1 Rue Brindejont des Moulinais, BP 45804, 31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03 E-mail : icom@icom-france.com
Fax : +33 (5) 61 36 03 00 URL : <http://www.icom-france.com>

Your local distributor/dealer:

Communications (Southern) Ltd

116 Missenden Acres, Hedge End,
Southampton, SO30 2AQ
Tele: **0700 4 RADIOS** (723567)
or: 01794 723467 (RADIOS)
e-mail: sales@commsouthern.co.uk
web: www.commsouthern.co.uk



ICOM



IP67



PMR446 TRANSCEIVER

IC-F29SR

Compact & Slim
 IP67 Waterproof
 Tough & Rugged




PMR446 TRANSCEIVER
IC-F29SR

Withstands 1m depth water for 30 minutes.

ACTUAL SIZE

Extensive Optional Accessories

Our range of optional Icom microphones and headsets increases the flexibility of your team in the workplace.

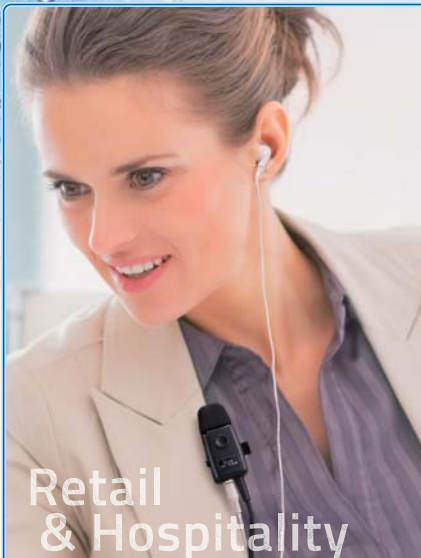


Retail & Hospitality

Earphone-microphones

HM-153LA
 Durable lapel microphone with earphone for low-profile, discreet placement.



PTT lock switch



Lapel clip

HM-166LA
 Light weight lapel microphone with earphone.




Facility & Security Guard

Speaker-microphones

HM-168LWP
 IP67 waterproof speaker-microphone for outdoor work or places prone to getting wet.



IP67



Earphone jack




HM-159LA
 Full size, durable speaker-microphone provides loud audio.



Earphone jack

HM-158LA
 Lightweight, compact size speaker-microphone.

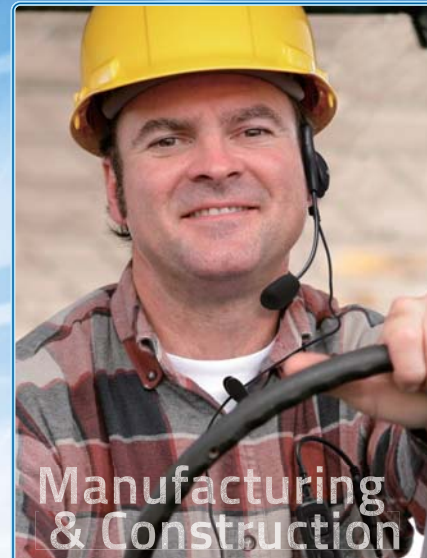



Manufacturing & Construction

Headsets

HS-94 + VS-4LA
 Earhook headset with boom microphone. Can be worn under a hard-hat.



Lapel clip



HS-95 + VS-4LA
 Behind-the-head type with boom microphone.

HS-97 + VS-4LA
 Throat microphone picks up your speech vibration even in a noisy environment.



VS-4LA
 PTT SWITCH CABLE
 Required when using any of these headset.