
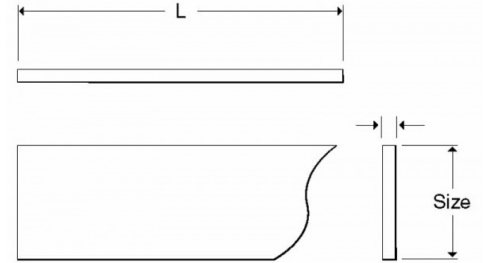


Bare Copper Tape

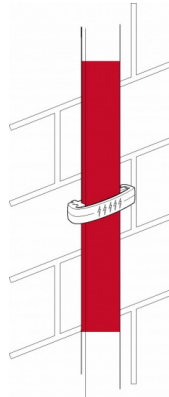

High conductivity bare copper tape is used on both lightning protection and earthing applications. It is annealed for ease of use and has radiused edges.

All our standard bare copper tapes are to BS EN 13601.

Part Number	Product	Dim (mm)	Coil Size (m)
TC253/25	Bare tape	25 x 3	25
TP253G/25	Grey PVC covered tape	25 x 3	25
TP253B/25	Brown PVC covered tape	25 x 3	25
CSC08	Solid circular bare conductor	8	50
TCC251	Perforated Copper	25 x 1.5	100

Material: Copper to BS EN 13601 (formerly BS 1432).