




**AUTOPA**

# TOPLOK Parking Post Galvanised, Galvanised & Colour or Stainless

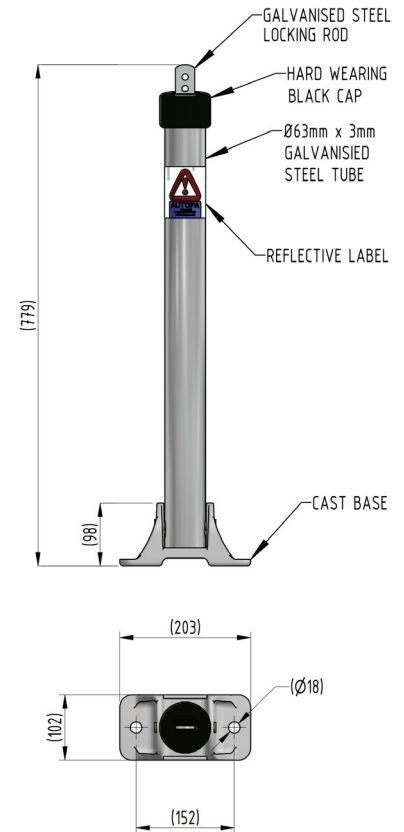

The TOPLOK parking post is the padlockable variant of the original hinged parking post; patented in 1959, and still the preferred choice for the protection of individual parking spaces throughout Britain.

The extremely durable and reliable design of the TOPLOK parking post ensures your parking space will always be available. The reflective, high visibility band ensures your parking post will always be seen.

The AUTOPA TOPLOK parking post is locked by fitting a padlock to the top of the post through the lower hole of the bar protruding through the cap, the padlock can also be fitted in the upper hole, thus allowing the post to be raised or lowered.

<u>Part Number</u>	<u>Description</u>	<u>Weight (kg)</u>
138 300 301	Galvanised	8.0kg
138 300 303	Galvanised & Colour	8.0kg
138 300 302	Galvanised & Black	8.0kg
138 300 304	Galvanised & Yellow	8.0kg
138 300 309	Stainless Steel (Grade 304)	8.0kg
138 100 991	M16 Expanding Bolt (2 required per post)	
138 100 906	40mm Brass Padlock with 2 keys (Random Key)	
138 100 907	40mm Brass Padlock with 2 keys (Identical Key)	

## Product details

- Plastic cap
- 64mm outside diameter galvanised steel tube body.

## Installation & use

TOPLOK Parking Posts require bolting down to a suitable concrete surface (not less than 300mm cubed) by means of two M16 anchor bolts.

The area surrounding the installation must be flat and level with no nearby surface irregularities or gradient changes.


Care must be taken to ensure the circular base recess is kept clear of cement and any other debris during installation and use.

This product is guaranteed for 12 months (if installed and used correctly).



[www.autopa.co.uk](http://www.autopa.co.uk)  
+44 (0)1788 550556

AUTOPA Limited  
Cottage Leap, Rugby, Warwickshire CV21 3XP



FM 31071 EMS 503166 OHS 552103