

CONAH HOSE REELS

Mountable Steel Air Hose Reel

- Heavy ribbed steel plate to ensure strong support.
- Spring located in the middle to ensure stability.
- Four direction non-sag rollers to reduce hose wear abrasion.



Maximum Working Pressure:
28 bar

Tech Sheet
10185



Rubber Air Hose, Spring Rewind, 1/2"

0800



SAHR-15-12 15m, 1/2" Rubber Air Hose, 1/2" BSPT Connections
SAHR-15N-12 No Hose, Capacity 15m 1/2" Rubber Hose

- Adjustable guide arm for multi position mounting.
- Special swivel joint for easy maintenance and repair.
- Ball bearing swivel joint structure, largely reducing friction.

Tech Sheet
10186



Hi-Vis, Spring Rewind, 1/2"

0800



SAHR-20-12SHV06T 20m, 3/8" BSPT Brass Male

Tech Sheet
10187




R6, Spring Rewind, 1/2"

0800



SAHR-15-12SR608F 15m, 1/2" BSPP Brass Female

Tech Sheet
10195

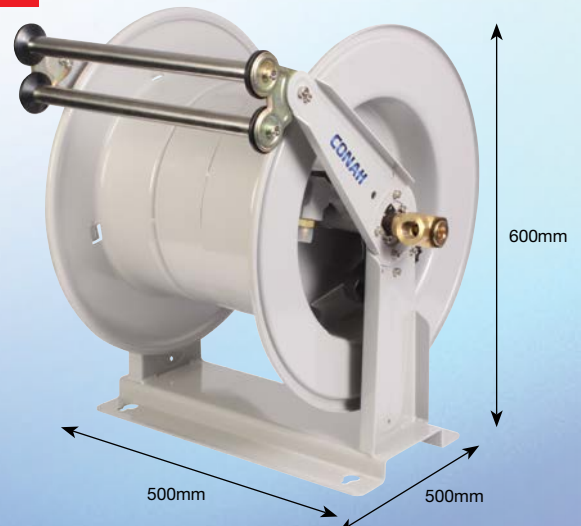

Spring Rewind, 3/4"

0800



SAHR-40N-34 No Hose, Capacity 40m, 3/4" Rubber Hose