

## Hydraulic Seals

### O-Rings



Imperial O-Rings, Nitrile 70 Shore, Per Pack of 100

| 1000         | ID      | (imp) |
|--------------|---------|-------|
| ORING-BS006N | 1/8"    | 0.07  |
| ORING-BS007N | 5/32"   | 0.07  |
| ORING-BS008N | 3/16"   | 0.07  |
| ORING-BS009N | 7/32"   | 0.07  |
| ORING-BS010N | 1/4"    | 0.07  |
| ORING-BS011N | 5/16"   | 0.07  |
| ORING-BS012N | 3/8"    | 0.07  |
| ORING-BS110N | 3/8"    | 0.103 |
| ORING-BS111N | 7/16"   | 0.103 |
| ORING-BS112N | 1/2"    | 0.103 |
| ORING-BS113N | 9/16"   | 0.103 |
| ORING-BS114N | 5/8"    | 0.103 |
| ORING-BS115N | 11/16"  | 0.103 |
| ORING-BS116N | 3/4"    | 0.103 |
| ORING-BS210N | 3/4"    | 0.139 |
| ORING-BS211N | 13/16"  | 0.139 |
| ORING-BS212N | 7/8"    | 0.139 |
| ORING-BS213N | 15/16"  | 0.139 |
| ORING-BS214N | 1"      | 0.139 |
| ORING-BS215N | 1.1/16" | 0.139 |
| ORING-BS216N | 1.1/8"  | 0.139 |
| ORING-BS217N | 1.3/16" | 0.139 |
| ORING-BS218N | 1.1/4"  | 0.139 |
| ORING-BS219N | 1.5/16" | 0.139 |
| ORING-BS220N | 1.3/8"  | 0.139 |
| ORING-BS221N | 1.7/16" | 0.139 |
| ORING-BS222N | 1.1/2"  | 0.139 |
| ORING-BS325N | 1.1/2"  | 0.21  |
| ORING-BS326N | 1.5/8"  | 0.21  |
| ORING-BS327N | 1.3/4"  | 0.21  |

Imperial O-Rings, Viton 75 Shore, Per Pack of 100

| 1000         | ID      | (imp) |
|--------------|---------|-------|
| ORING-BS006V | 1/8"    | 0.07  |
| ORING-BS007V | 5/32"   | 0.07  |
| ORING-BS008V | 3/16"   | 0.07  |
| ORING-BS009V | 7/32"   | 0.07  |
| ORING-BS010V | 1/4"    | 0.07  |
| ORING-BS011V | 5/16"   | 0.07  |
| ORING-BS012V | 3/8"    | 0.07  |
| ORING-BS110V | 3/8"    | 0.103 |
| ORING-BS111V | 7/16"   | 0.103 |
| ORING-BS112V | 1/2"    | 0.103 |
| ORING-BS113V | 9/16"   | 0.103 |
| ORING-BS116V | 3/4"    | 0.103 |
| ORING-BS211V | 13/16"  | 0.139 |
| ORING-BS212V | 7/8"    | 0.139 |
| ORING-BS213V | 15/16"  | 0.139 |
| ORING-BS215V | 1.1/16" | 0.139 |
| ORING-BS217V | 1.3/16" | 0.139 |
| ORING-BS218V | 1.1/4"  | 0.139 |
| ORING-BS220V | 1.3/8"  | 0.139 |
| ORING-BS221V | 1.7/16" | 0.139 |
| ORING-BS222V | 1.1/2"  | 0.139 |
| ORING-BS325V | 1.1/2"  | 0.21  |
| ORING-BS326V | 1.5/8"  | 0.21  |
| ORING-BS327V | 1.3/4"  | 0.21  |

Metric O-Rings, Nitrile 70 Shore, Per Pack of 100

| 1000     | ID (mm) | (mm) |
|----------|---------|------|
| M-3X2    | 3       | 2    |
| M-4X2    | 4       | 2    |
| M-5X2    | 5       | 2    |
| M-6X2    | 6       | 2    |
| M-7X2    | 7       | 2    |
| M-8X2    | 8       | 2    |
| M-10X2   | 10      | 2    |
| M-10X2.5 | 10      | 2.5  |
| M-11X2.5 | 11      | 2.5  |
| M-12X2.5 | 12      | 2.5  |
| M-14X2.5 | 14      | 2.5  |
| M-16X2.5 | 16      | 2.5  |
| M-17X2.5 | 17      | 2.5  |
| M-19X2.5 | 19      | 2.5  |
| M-19X3   | 19      | 3    |
| M-20X3   | 20      | 3    |
| M-22X3   | 22      | 3    |
| M-24X3   | 24      | 3    |
| M-25X3   | 25      | 3    |
| M-27X3   | 27      | 3    |
| M-28X3   | 28      | 3    |
| M-30X3   | 30      | 3    |
| M-32X3   | 32      | 3    |
| M-33X3   | 33      | 3    |
| M-35X3   | 35      | 3    |
| M-36X3   | 36      | 3    |
| M-38X3   | 38      | 3    |
| M-38X4   | 38      | 4    |
| M-41X4   | 41      | 4    |
| M-44X4   | 44      | 4    |

- Hydraulics
- Hydraulic QRC
- Pneumatic QRC
- Ind. Air Prep., Monitor & Test
- KELM™ Pneumatics
- Pneumatic & Vacuum Equipment
- Valves
- Ring Main Systems
- Adaptors & Fittings
- Stainless Steel
- Malleable Iron
- Hose, Tubing & Couplings
- Clamps & Clips
- Sprays & Adhesives
- Blow Guns & Vacuum
- Wash Down & Fuelling
- Air Tools
- Tools, Hardware & PPE

## Tech Sheet 20353

### Flaretite



Flaretite 304 Stainless Steel, JIC 37°

| 0266    | JIC     |
|---------|---------|
| FF13267 | 7/16"   |
| FF13268 | 9/16"   |
| FF13269 | 3/4"    |
| FF13270 | 7/8"    |
| FF13271 | 1.1/16" |
| FF13272 | 1.5/16" |
| FF13273 | 1.5/8"  |
| FF13570 | 1.7/8"  |
| FF13571 | 2.1/2"  |


The Flaretite Seal is a metal stamping, designed with multiple, concentric sealing rings.

The entire seal is coated with a **dry-to-the-touch**, baked-on Loctite™ sealant. When inserted into a fitting, the concentric rings form multiple seals down the face of the flare, while the Loctite coating fills minor imperfections, dramatically increasing the integrity of the fitting. New ISO and NFPA standards strongly recommend seals for all fittings.

- Fits all standard JIC/SAE/JIS flare fittings, hydraulic and pneumatic
- Has a **user-friendly tab** to clip the seal onto the fitting
- **Protects against weeping** on new and damaged fittings
- Creates a perfect **leak-free clip-on seal, guaranteed**
- Complies with latest international standards

**Other seals available on request.**

**Working Temperature:**  
-40°C to +150°C

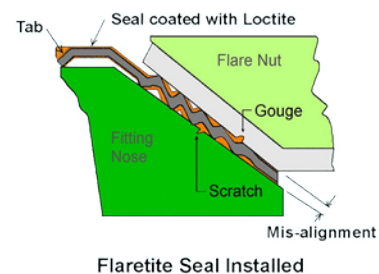

For JIC Adaptors see pages 206-213