




AUTOPA

Plain Square Bollard 1000mm Above Ground 50mm² - 150mm² Galvanised

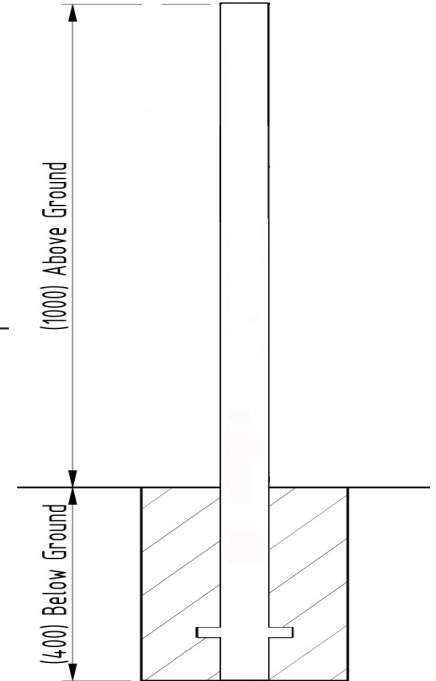

AUTOPA's range of Plain Square Bollards offers a simple and cost effective means of establishing control over parking and access. Plain Square Bollards are ideal for use around pedestrian precincts, pavements, play and parking areas, as part of traffic calming measures, pedestrianisation schemes and as a deterrent to ram-raiders.

The complete range of Plain Square Bollards are available in diameters from 50mm² to 150mm² and are available with extended legs for casting into concrete or with a flange plate for bolting down.

Colour coated and removable versions are also available.

Part Number	Description	Wall Thickness	Weight (kg)
138 121 860	50mm x 50mm Galvanised (Concrete In)	3mm	6.2kg
138 121 850	60mm x 60mm Galvanised (Concrete In)	3mm	7.6kg
138 121 871	70mm x 70mm Galvanised (Concrete In)	3mm	8.8kg
138 121 878	80mm x 80mm Galvanised (Concrete In)	3mm	10.2kg
138 121 880	90mm x 90mm Galvanised (Concrete In)	3mm	11.6kg
138 121 820	100mm x 100mm Galvanised (Concrete In)	3mm	13.0kg
138 121 878	120mm x 120mm Galvanised (Concrete In)	5mm	25.1kg
138 121 840	150mm x 150mm Galvanised (Concrete In)	5mm	32.0kg

Product details

- 1000mm tall
- Concrete In bollards 400mm below ground
- Reflective bands available
- Supplied with welded flat steel cap
- Loose cap available for filling with concrete on site
- Bolt Down version available

Installation & use

Concrete In Plain bollards require an excavated hole (no less than 400mm³) for installation. AUTOPA recommends that bollards are placed no further than 1,200mm apart to ensure that no vehicle may pass between them. This product is guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk
+44 (0)1788 550556

AUTOPA Limited
Cottage Leap, Rugby, Warwickshire CV21 3XP

