

SPECIFICATIONS FOR TOWA AP-SERIES LABEL APPLICATOR



Paper Quality : Thickness of label itself is required over 50 microns. (Consult us about Film and Synthetic Paper.)

Release Liner : Blue glassin type is recommended.

Label Roll : Rolling with inner adhesive side is recommended.
(If roll is made with outer adhesive side, there might be difficulty to dispense labels by its carting.)


Roll & Core : Min. diameter of label core : 25mm Max. outer diameter of Roll : 100mm
*Core adapter : 38mm adapter is provided with APN/F-60 and APN/F-100. 28mm adapter is provided with APN/F30 and APN10-30
*Diameter of paper core : 1.5 ~ 2 inches' paper core is recommended rather than the same with 1 inch' because user may have much heavier feeling in case of bigger number of labels held in roll with 1 inch' core.

Gap between labels : 2.0mm ~ 3.0mm is recommended. (Consult us about other length of gap)

Label Shape : APN series are designed to dispense for rectangle shape of labels. APF series are for non-rectangular and rectangle shape of labels

Applicable size of labels :

Model	G. Weight	Label Width	Label Length	Max. width of liner	Max. outer diameter of roll	Gap
APN-30	294g	20mm ~ 30mm	18mm ~ 60mm	34mm	100mm	2-3mm
APN-60	347g	29mm ~ 60mm	18mm ~ 60mm	64mm	100mm	2-3mm
APN-100	395g	50mm ~ 100mm	18mm ~ 60mm	104mm	100mm	2-3mm
APF-30	312g	20mm ~ 30mm	20mm ~ 60mm	34mm	100mm	2-3mm
APF-60	370g	20mm ~ 60mm	20mm ~ 60mm	64mm	100mm	2-3mm
APF-100	420g	20mm ~ 100mm	20mm ~ 60mm	104mm	100mm	2-3mm
APN10-30	292g	20mm ~ 30mm	10mm ~ 60mm	34mm	100mm	2-3mm

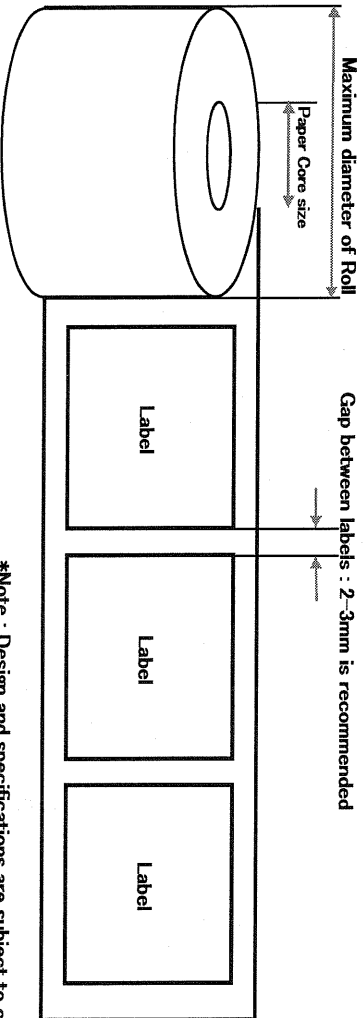

*Note : Design and specifications are subject to changes without prior notice.

TOWA Company, Limited
Ginza YK Building, Ginza 5-10-9, Chuo-ku, Tokyo 104-0061 Japan
Phone : +81-3-3572-9621, URL : <http://www.towa.jp/export>