


## **GFC1500** 1000mm

## **Galvanised or Galvanised & Colour**




The GFC1500 Ornamental Mild Steel Bollard from AUTOPA is suitable for a wide range of locations and purposes. Constructed using mild steel, then galvanised to ensure its longevity. Cap and rings are welded onto the steel tube to complete the design.

Supplied concrete in as standard, bolt down and removable versions are also available.

The bollards are available in a galvanised and galvanised and coated finish (RAL numbers must be specified at time of order).

Eyelets, hooks and chains can be added to these bollards to complete the decorative effect.

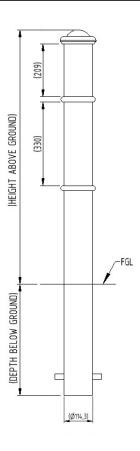

Dant Neuroban	Description	Lift Mainht (lan)	Mainlet (Ica)
Part Number	<u>Description</u>	<u>Lift Weight (kg)</u>	Weight (kg)
138 120 003	Galvanised - Concrete In		15kg
138 120 001	Galvanised & Black - Concrete In		15kg
138 120 002	Galvanised & Colour - Concrete In		15kg
138 120 004	Galvanised - Bolt Down		15kg
138 120 005	Galvanised & Black - Bolt Down		15kg
138 120 008	Galvanised & Colour - Bolt Down		15kg
138 120 006	Galvanised - Removable	15kg	23kg
138 120 007	Galvanised & Black - Removable	15kg	23kg
138 120 009	Galvanised & Colour - Removable	15kg	23kg

## **Product details**

- 1000mm height above ground
- 114mm diameter
- 3mm wall thickness

- Concrete in 400mm (below ground)
- Price excludes fixing down bolts and padlock to secure
- Socket 300mm (below ground)

## Installation & use

Bolt down to a suitable concrete surface.

Telescopic, removable and concrete in are supplied with welded fixing spikes to ensure firm ground anchorage into concrete. Telescopic, removable and concrete in require a suitable excavated hole for installing into concrete. Products are guaranteed for 12 months (if installed and used correctly).



www.autopa.co.uk +44 (0)1788 550556

