

Reel Bogie

Capacity: 1000Kg

Four curved support straps provide support for large cylindrical loads. Highly manoeuvrable. Unit pivots on centre wheels

O/A L x W x H: 1065 x 585 x 305
 Cast iron wheels 2 x 200mm dia. in centre and 4 x 150mm dia. wheels at corners.
 All wheels roller bearings.
 Weight: 51Kg
 Finish: Blue epoxy
 Ref: TD210



Low Loading Bogie

Capacity 2000Kg

Strong all steel construction with sloping end frames for easy loading
 Protective side guards
 O/A L x W x H: 760 x 510 x 90
 Wheels: 6 steel wheels with roller bearings.
 Weight: 22Kg
 Finish: Blue epoxy
 Ref: TD211

Up to 2 Tonne
Load Shifting



Platform and Frame Dollies

Capacity 300 kg

A range of dollies to suit most industrial needs.
 Steel frame construction with a choice of deck types.
 Compact 600 x 600 mm deck size.

Finish: Blue epoxy.
 4 swivel castors with 125 mm dia. rubber tyred roller bearing wheels with bright zinc plated centres.



Deck type	timber	steel	open frame	load supports
Capacity kgs	300	300	300	300
Deck L x W mm	600 x 600	600 x 600	600 x 600	600 x 600
Platform height mm	198	198	198	198 + 150
Wheel dia. mm	125	125	125	125
Weight kgs	19	21	15	17
Ref:	TD600	TD601	TD602	TD603

48 HOUR

48 HOUR

48 HOUR

48
HOUR

DESPATCH

ON MARKED PRODUCTS

Clip-Up Handle To Carry Around



Ref: TD100



Platform with folding handle

150kg capacity

Steel platform, 4 swivel castors, 75mm dia wheels.
Grey non marking tyres. Total weight 10kg

O/a height with handle vertical 765mm
O/a length with handle folded 690mm
Platform L x W x H: 580 x 500 x 125mm
Finish: Light blue epoxy

Sheet buggies

For in-plant or on-site use Timber and metal sheets
Frames and doors Chipboard and hardboard.

Tubular steel construction.
Plastic hand grips.
Finish: Blue epoxy
Wheels: 2 axle mounted 200 mm dia. solid tyred wheels, or 260mm dia
pneumatic tyred wheels.
Choice of solid rubber or pneumatic tyres
All wheels roller bearings.



Model TP40
Capacity 300Kg
Non-slip ribbed
rubber pad platform

O/all H x W: 1220 x 590mm
Platform L x W: 500 x 200mm
Handle Length: 1180mm
200mm dia solids. Ref: TP40
260mm dia pneus. Ref: TP40P

Model TP41
Capacity 300Kg
Varnished plywood platform

O/all H x W: 1220 x 550mm
Platform L x W: 800 x 250mm
Handle Length: 2000mm
200mm dia solids. Ref: TP41
260mm dia pneus. Ref: TP41P



Beam Trolley

Capacity 350 kg
For easy transportation of long loads
in factories, showrooms and warehouses.

Carpets and floor coverings
Poles and timber products
Tubular construction throughout with centre axle mounted with large 400mm dia.
pneumatic tyred wheels for maximum mobility and soft ride, or 400mm dia solid
rubber tyred wheels.
Overall height: 420 mm
Overall width: 660 mm
Overall length: 1010 mm
Finish: Blue epoxy.
Weights: TP46:26 kg TP46P:13kg

Solid rubber wheel. Ref: TP46
Pneumatic wheel. Ref: TP46P

Pipe and Bar Truck

Capacity 300 kg
Pipework, Bar stock, Long goods

Steel angle and tube construction with centre axle mounted with large 250 mm
dia. rubber tyred wheels for maximum mobility and load capacity, or 260mm dia
pneumatic tyred wheels for a softer ride.
Finish: Blue epoxy

Overall height: 680 mm
Overall width: 550 mm
Overall length: 910 mm
Weight TP47: 20 kg
Weight TP47P: 16kg
Solid rubber tyres. Ref: TP47
Pneumatic tyres. Ref: TP47P

Plate Skate


Capacity 250Kg

Expanding steel skates for easy movement of
sheet materials up to 50 mm thick

Wheels: 2 x 150mm dia. nylon
Overall L x W x H:
300 x 180 x 280mm
Finish: White epoxy
Ref: TP30

48
HOUR
DESPATCH

Softride Pneumatic Tyres

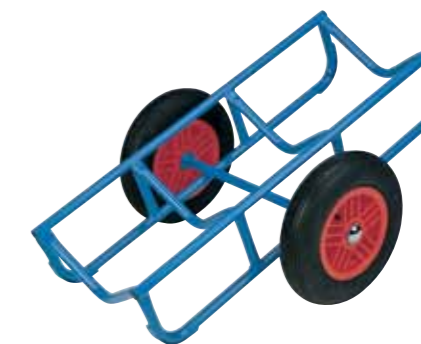

We can manufacture to your
special sizes on request



Automatically adjusts to
thickness of material



The Big Plate Trucks



Open frame model



Ply deck model

Hi-Frame Plate Trucks

Capacity 500 and 750Kg

Heavy duty angle chassis with high tubular support frame for sheet material transport and storage.
Fully welded throughout.
Open frame or ply deck.

Finish: Blue epoxy.
Wheels: 2 swivel 2 fixed castors with rubber tyred wheels, bright steel centres and roller bearings.

UDL Capacity	500 kg	750 kg
O/all height mm	1500	1570
Frame height mm	1175	1175
Max load depth mm	450	450
O/all L x W mm	2250 x 700	2250 x 700
Wheel dia. mm	200	250
Open frame		
Platform height	285mm	355mm
Wt	84 kg	92 kg
Ref	TP31	TP32
Ply deck		
Platform height	300mm	370mm
Wt	94 kg	104 kg
Ref	TP31P	TP32P




Plywood Deck



Standard Plate Trucks

Capacity: 500kg UDL with removable bars 2 supplied - extras available.

2 deck sizes
Ply or zinc plated deck
Welded angle chassis
Support bar height 725mm from deck
Deck height: 275 mm
Finish: Blue epoxy.
Wheels: 2 swivel 2 fixed castors with 200 mm dia. rubber tyred wheels.
Roller bearings.



Platform L x W mm	Bars (2 supplied)		Ply Platform		Bright Zinc Steel Platform	
	Position	Centres	Weight	Ref	Weight	Ref
1000 x 700	5	168mm	46 kg	TP35	59 kg	TP33
1200 x 800	6	155mm	54 kg	TP36	72 kg	TP34

Optional Extras	Ref
1000 mm length additional Support Bars	TP7
1200 mm length additional Support Bars	TP8

Optional Extras:
Total stop brakes extra (pair)
Ref: B013

Standard Sheet Rack

Vertical storage of all sheet material.

Floor bracing for sheet support
Finish: blue epoxy



O/A H x L x W mm	Bays	Cap.Tonne	Wt. Kg	Ref
1040 x 2060 x 1200	4	4	152	SPR1
1040 x 2060 x 1400	5	5	170	SPR2
1040 x 2060 x 1600	6	6	188	SPR3
1040 x 2060 x 1800	7	7	206	SPR4
1040 x 2060 x 2000	8	8	224	SPR5
1040 x 2060 x 2200	9	9	242	SPR6
1040 x 2060 x 2400	10	10	260	SPR7

Horizontal Bar Rack

Single or double sided


Maximum load 500Kg per level single sided
1000kg per level double sided.
Freestanding units.
Six storage levels on single sided units,
seven levels on double sided units.
Starter bay 2 uprights + cross bracing.
Extension bay 1 upright + cross bracing.
Finish: Blue epoxy



Description	O/A H x D x L mm	Wt. Kg	Ref
Single sided starter bay	1880 x 860 x 2760	100	HBR1
Single sided extension bay	1880 x 860 x 2260	53	HBR1E
Double sided starter bay	1985 x 920 x 2760	128	HBR2
Double sided extension bay	1985 x 920 x 2260	68	HBR2E

Vertical Bar Rack

Fully welded steel construction with steel base.
600 x 250 mm storage bays.
Predrilled for bolting to floor, fixings not supplied.
Finish: Blue epoxy



No. of bays	O/A H x D x L mm	Wt. Kg	Ref
4	1500 x 600 x 1200	84	VBR4
6	1500 x 600 x 1800	108	VBR6
8	1500 x 600 x 2400	135	VBR8





Units **MUST** be sited on solid level ground.

Stacking bar cradles

Maximum 5 high

Flexible stacking cradles for storage of varying lengths of: bar, tube, flats, angles etc.

Load capacity per cradle 1000Kg

Fitted with 127mm square pallet feet.

Finish: Blue epoxy

O/A H x D x L mm	Effective W x H mm	Wt. Kg	Ref
470 x 790 x 385	610 x 305	21	SBC1
625 x 790 x 385	610 x 460	24	SBC2
470 x 1095 x 385	915 x 305	25	SBC3
625 x 1095 x 385	915 x 460	28	SBC4



Multi-height Sheet Rack

Ideal for off-cuts and other variable sizes of sheet and plate.

Support bar heights: 400; 550; 700; 850 and 1000mm

Distance between bars: 160mm Fitted with sheet steel base.

Predrilled for floor fixing.

Finish: blue epoxy

O/A H x W x D: 1000 x 1400 x 800mm

Weight: 75Kg

Ref:MPR

48
HOUR

DESPATCH



Full-height Sheet Rack

Multipurpose rack

Overall dimensions: 1015mm deep x 1080mm wide x 1220mm high

Distance between uprights: 305mm with formed sheet steel base

Height from base to central support beam: 575mm

Pre-drilled for floor fixing (bolts not supplied)

Finish: Blue epoxy

Weight: 53kgs

Ref:FHSR

48
HOUR

DESPATCH

