

Trader Truck Hand Turntable Trailers

- 3 deck sizes
- MDF or steel deck
- Solid rubber or pneumatic tyres
- Removable steel ends and sides option
- Loop handle
- Parking brake option

Fully welded construction from rectangular and round section steel tube.
 Metalwork finished in red epoxy
 Optional sides finished in light grey epoxy.

Optional extras

Tee bar handle

Factory fitted at time of manufacture as alternative to loop handle, at no extra cost.
 Add suffix "T" to reference.



Parking brake

Factory fitted at time of manufacture. Brake is applied when handle is raised to vertical position.
 Ref: PB1 (extra)



For side / end panel kits for these trailers, see next page.



Model TR126



Model TR230



Model TR230P



Model TR120



Model TR120S



Model TR226



Model TR121P

Deck Size mm	Deck Height	Capacity	Wheel Dia.	Tyre Type	MDF Deck		Steel Deck		End / Side Panel Kit	
					Wt Kg	Ref	Wt Kg	Ref	Wt Kg	Ref
1200 x 600	425mm	350Kgs	200mm	Solid	37	TR120	42	TR220	14	TR126SS
	450mm	500Kgs	260mm	Pneumatic	39	TR121P ⁴⁸	44	TR221P	14	TR126SS ⁴⁸
	450mm	500Kgs	250mm	Solid	41	TR121S	46	TR221S	14	TR126SS
1500 x 750	500mm	750Kgs	400mm	Solid	78	TR126	94	TR226	17	TR157SS
	500mm	750Kgs	400mm	Pneumatic	55	TR126P	71	TR226P	17	TR157SS
	500mm	1000kgs	400mm	Solid	88	TR127	104	TR227	17	TR157SS
	500mm	1000kgs	400mm	Pneumatic	65	TR127P	81	TR227P	17	TR157SS
2000x1000	500mm	1000kgs	400mm	Solid	120	TR130	149	TR230	22	TR201SS
	500mm	1000kgs	400mm	Pneumatic	98	TR130P	127	TR230P	22	TR201SS





TR126 with TR157SS

Post socket - remove cap and insert post, then lock by tightening bolt. Sides then simply slot in



Removable End / Side Panel Kit

End / side panel kit
200mm high panels
Corner posts fit into steel tubes and lock with simple bolt tightening. Formed steel side and end panels slot onto steel channels, reduces usable length and width by 50mm.

TR230P with TR210SS



Phenolic Turntable Trailers


General purpose hand pulling turntable trailers with black, textured, anti-slip phenolic deck surface.

Choice of load capacities: 500, 750 and 1000kg

3 Types

- Flatbed platform;
- Removable phenolic end and side panels
- Wire mesh fixed ends and removable sides

Solid rubber or pneumatic tyred wheels, all roller bearing. Constructed from rectangular and round section steel tube. Finish: Red epoxy.



Trailer with flatbed platform

Capacity Kg	Deck L x W mm	Deck Height mm	Wheel Dia. mm	Wheel Type	Weight Kg	Ref
500	1200 x 600	450	250	Solid	44	TR321
				Pneu	41	TR321P
750	1500 x 750	500	400	Solid	89	TR326
				Pneu	63	TR326P
1000	1800 x 900	500	400	Solid	120	TR329
				Pneu	94	TR329P

Trailer with 200mm high removable Phenolic ends and sides

Capacity Kg	Deck L x W mm	Deck Height mm	Wheel Dia. mm	Wheel Type	Weight Kg	Ref
500	1200 x 600	450	250	Solid	53	TR341
				Pneu	50	TR341P
750	1500 x 750	500	400	Solid	137	TR342
				Pneu	111	TR342P
1000	1800 x 900	500	400	Solid	133	TR343
				Pneu	107	TR343P

Trailer with 400mm high wire mesh fixed ends and removable sides

Capacity Kg	Deck L x W mm	Deck Height mm	Wheel Dia. mm	Wheel Type	Weight Kg	Ref
500	1200 x 600	450	250	Solid	66	TR351
				Pneu	63	TR351P
750	1500 x 750	500	400	Solid	113	TR352
				Pneu	87	TR352P
1000	1800 x 900	500	400	Solid	152	TR353
				Pneu	126	TR353P

Turntable Trailer with Drop down side panels

General purpose hand pulling trailers with steel load retaining panels. Ends are removable and slide out - sides are either fully removable or simply fold down. Ends & Sides height: 200mm Finish: Blue epoxy chassis, Yellow epoxy sides

Model TR126DDS



- 3 deck sizes
- MDF or steel deck
- Solid rubber or pneumatic tyres
- Loop handle
- Parking brake option

Deck Size mm	Deck Height	Capacity	Wheel Dia.	Tyre Type	MDF Deck		Steel Deck	
					Wt Kg	Ref	Wt Kg	Ref
1200 x 600	425mm	350Kgs	200mm	Solid	51	TR120DDS	56	TR220DDS
	450mm	500Kgs	260mm	Pneumatic	53	TR121PDDS	58	TR221PDDS
	450mm	500Kgs	250mm	Solid	55	TR121SDDS	60	TR221SDDS
1500 x 750	500mm	750Kgs	400mm	Solid	95	TR126DDS	111	TR226DDS
	500mm	750Kgs	400mm	Pneumatic	72	TR126PDDS	88	TR226PDDS
	500mm	1000kgs	400mm	Solid	105	TR127DDS	121	TR227DDS
	500mm	1000kgs	400mm	Pneumatic	82	TR127PDDS	98	TR227PDDS
2000x1000	500mm	1000kgs	400mm	Solid	142	TR130DDS	171	TR230DDS
	500mm	1000kgs	400mm	Pneumatic	120	TR130PDDS	149	TR230PDDS

Optional extras

available for all models

Tee bar handle

Factory fitted at time of manufacture as alternative to loop handle, at no extra cost. Add suffix "T" to reference.



Parking brake

Factory fitted at time of manufacture. Brake is applied when handle is raised to vertical position. Ref PB1 (extra)



Turntable Trailer with Tubular Supports

General purpose hand pulling trailers with tubular load retaining panels. Ends are fixed - sides lift off and are fully removable. Ends & Sides height: 610mm Finish: Blue epoxy chassis and ends, Yellow epoxy sides

- 3 deck sizes
- MDF or steel deck
- Solid rubber or pneumatic tyres
- Loop handle
- Parking brake option



Model TR126TU

Deck Size mm	Deck Height	Capacity	Wheel Dia.	Tyre Type	MDF Deck		Steel Deck	
					Wt Kg	Ref	Wt Kg	Ref
1200 x 600	425mm	350Kgs	200mm	Solid	56	TR120TU	61	TR220TU
	450mm	500Kgs	260mm	Pneumatic	58	TR121PTU	63	TR221PTU
	450mm	500Kgs	250mm	Solid	60	TR121STU	65	TR221STU
1500 x 750	500mm	750Kgs	400mm	Solid	100	TR126TU	116	TR226TU
	500mm	750Kgs	400mm	Pneumatic	77	TR126PTU	93	TR226PTU
	500mm	1000kgs	400mm	Solid	110	TR127TU	126	TR227TU
	500mm	1000kgs	400mm	Pneumatic	87	TR127PTU	103	TR227PTU
2000x1000	500mm	1000kgs	400mm	Solid	147	TR130TU	176	TR230TU
	500mm	1000kgs	400mm	Pneumatic	125	TR130PTU	154	TR230PTU



Turntable Trailers with mesh cage supports

Detachable mesh sides

General purpose hand pulling trailers with steel 50 x 50mm mesh load retaining panels.

Ends are fixed - sides are lift off and fully removable.

Finish: Blue epoxy chassis and ends, Yellow epoxy sides

- Fixed mesh ends - detachable mesh sides
- Sides 760mm high
- 3 deck sizes
- MDF or steel decks
- Front turntable steering with loop handle
- Solid or pneumatic tyres
- Flush MDF deck polyurethane coated
- Parking brake option



Mesh size 50 x 50 mm
Panel heights above deck 760mm



Model
TR126MH

Deck Size mm	Deck Height	Capacity	Wheel Dia.	Tyre Type	MDF Deck		Steel Deck	
					Wt Kg	Ref	Wt Kg	Ref
1200 x 600	425mm	350Kgs	200mm	Solid	59	TR120MS	64	TR220MS
	450mm	500Kgs	260mm	Pneumatic	61	TR121PMS	46	TR221PMS
	450mm	500Kgs	250mm	Solid	63	TR121SMS	48	TR221SMS
1500 x 750	500mm	750Kgs	400mm	Solid	104	TR126MS	120	TR226MS
	500mm	750Kgs	400mm	Pneumatic	81	TR126PMS	97	TR226PMS
	500mm	1000kgs	400mm	Solid	114	TR127MS	130	TR227MS
	500mm	1000kgs	400mm	Pneumatic	91	TR127PMS	107	TR227PMS
2000x1000	500mm	1000kgs	400mm	Solid	152	TR130MS	181	TR230MS
	500mm	1000kgs	400mm	Pneumatic	130	TR130PMS	159	TR230PMS

Optional extras

Tee bar handle

Factory fitted at time of manufacture as alternative to loop handle, at no extra cost.

Add suffix "T" to reference.



Parking brake

Factory fitted at time of manufacture. Brake is applied when handle is raised to vertical position.

Ref PB1 (extra)



Double Ended Centre Axle Trucks

Capacity 350kg UDL
With optional drop down sides

Tubular or steel panel end frames.

Sides available with panel ends only.

Sides are hinged on strong steel pins and securely latched.

Ideal for horticultural environments and many industrial applications

- Garden centres
- Markets and market gardens
- Show grounds and parks
- Builders and builders merchants
- Factory maintenance sections
- Schools, hospitals and institutions
- Docks and harbour boards

Angle deck frame with inset polyurethane coated plywood platform.

Fully welded chassis constructed from rectangular hollow section and tubular steel.

Sturdy tubular ground supports with welded steel protector pads.

Deck height: 460 mm at centre line

End and side panel height: 230 mm above deck.

Wheels: High quality red centres with roller bearings. 400 mm dia.

choice of solid rubber or pneumatic tyres.

Finish: Blue epoxy chassis and end panels

Yellow epoxy drop down sides.



Fixed tubular ends
Deck height at centre line 460 mm



Fixed panel ends and drop down steel sides
Panel height above deck 230 mm



Construction	Tyre Type	Effective Deck W x L mm	Max Overall W x L mm	Weight Kgs	Ref
Fixed tubular ends	Solid	800 x 1500	800 x 1780	63	WT07
	Pneumatic			48	WT07P
	Solid	1000 x 2000	1000 x 2280	105	WT071
	Pneumatic			91	WT071P
Fixed steel panel ends	Solid	800 x 1500	800 x 1780	67	WT08
	Pneumatic			54	WT08P
	Solid	1000 x 2000	1000 x 2280	109	WT081
	Pneumatic			97	WT081P
Fixed panel ends and drop down steel sides	Solid	750 x 1500	860 x 1780 (sides dropped)	78	WT09
	Pneumatic			65	WT09P
	Solid	950 x 1500	1060 x 2280 (sides dropped)	120	WT091
	Pneumatic			108	WT091P

Hand Trailers

Easy to operate, with plate to plate turntable
Welded construction from tube and steel angle.
Solid axle assembly
Loop towing handle



TR50P with PB1 parking brake

Tongue and Groove Timber Decks

Metalwork finished in hammer blue air dry enamel paint
Woodwork finished with clear polyurethane varnish.

- 3 Platform Sizes
- Choice of Solid or Pneumatic Tyres
- Available with choice of Flat Bed, Box or Drop-in Sides

Available in 3 versions

18 different options to which you can add an optional parking brake.

Flat Bed

Traditional trailer with tongue and grooved timber deck without ends or sides.

(If you already have a flat bed and want a drop on box body only, prices are available on application.)

Fixed head and tail boards with drop in sides

Trailer complete with fixed corner posts, 2 fixed ends infilled with tongue and groove timber. Drop in sides of tongue and groove timber. Sides 200mm high

Drop on Box Body

Trailer complete with drop on box body with corner steel angle frames, inner corner timber supports, infilled with tongue and grooved timber fixed panels. Sides 200mm high.

Platform L x W mm	Platform Height mm	Capacity Kg	Wheel Dia. mm	Tyre Type	Flat Bed		Fixed ends, Drop in sides		Drop on Box Body	
					Wt Kg	Ref	Wt Kg	Ref	Wt Kg	Ref
1067 x 610	325	350	200	Solid	45	TR40	56	TR40RS	55	TR40BX
	355		260	Pneumatic	43	TR40P	54	TR40RSP	53	TR40BXP
1525 x 762	355	500	250	Solid	56	TR50	69	TR50RS	68	TR50BX
	355		260	Pneumatic	54	TR50P	67	TR50RSP	66	TR50BXP
1830 x 762	510	600	400	Solid	80	TR70	97	TR70RS	96	TR70BX
	510		400	Pneumatic	69	TR70P	86	TR70RSP	85	TR70BXP



Fixed head and tail boards, with drop-in sides



Optional extra

for all trailers

Parking Brake

(Factory fitted at time of order)
Brake applied to front wheels when the pull handle is raised to the fully vertical position. Wt 4kg

Ref: PB1

Trailers

Standard deck height 510 mm

Braced and reinforced all steel welded chassis
High quality polyurethane coated ply decks inset and finished flush.
Protected all round by steel side frame
Fixed optional headboard only or complete with drop down sides and tailgate.
All with polyurethane coated ply panels
Large 400 mm dia. roller bearing wheels with either solid or pneumatic tyres
Hard wearing blue epoxy finish

Handles

Loop handles are supplied as standard.
T bar handles can be supplied at no extra cost. please specify T bar handle when ordering

Turntable Steering

Front axle mounted ball race turntable.
Highly manoeuvrable with tight turning circle.



Single Ackerman Steering

Front steering with rigid back axle.
Limited turning circle with 100% stability



1 Tonne hand pull turntable or ackerman steering

3 Options

- Flat Bed
- Headboard
- Headboard Sides and Tailgate



Model TR110P



Model TR112P



Model TR160

	UDL Capacity	1000 Kg			
		1500 x 800		2000 x 1000	
Deck Size mm		400 x 100		400 x 110	
Wheel Diameter x Tread		400 x 100	400 x 110	400 x 100	400 x 110
Tyre Type		solid	pneumatic	solid	pneumatic
TURNTABLE - flat bed	Wt.	112 kg	85 kg	137 kg	110 kg
	Ref:	TR100	TR100P	TR110	TR110P
TURNTABLE - with headboard	Wt.	119 kg	92 kg	145 kg	118 kg
	Ref:	TR101	TR101P	TR111	TR111P
TURNTABLE - with headboard sides & tailgate	Wt.	142 kg	115 kg	175 kg	148 kg
	Ref:	TR102	TR102P	TR112	TR112P
ACKERMAN - flat bed	Wt.	107 kg	80 kg	129 kg	102 kg
	Ref:	TR150	TR150P	TR160	TR160P
ACKERMAN - with headboard	Wt.	114 kg	87 kg	137 kg	110 kg
	Ref:	TR151	TR151P	TR161	TR161P
ACKERMAN - with headboard sides & tailgate	Wt.	137 kg	110 kg	167 kg	140 kg
	Ref:	TR152	TR152P	TR162	TR162P



Capacities from 1 tonne to 3 tonne


Heavy Duty Towing Trailers

For in-plant operation
Maximum towing speed 8 kph (5 mph)

- Fully welded steel chassis.
- Anti-drop towbar 35mm tow eye.
- Rear hitch and pin.
- Finish blue epoxy.

- Flush ply decks - sanded and coated.
- Standard extras - price on application
- Fitted side and headboards.
- Steel decks - plain or chequer (Durbar) plate.
- Other sizes and capacities.
- Any superstructure designed to your needs.

Rear hitch and pin

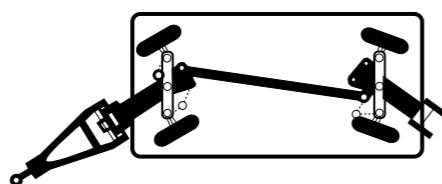

1000kg Long Load Towing Trailer

For in-plant operation

- Welded steel construction with sturdy metal platforms and side frame superstructures.
- Ball bearing turntable plates 405mm dia.
- 400mm dia. wheels with solid rubber tyres.
- Finish: Blue epoxy.

- Length: 3800 mm
- Drawbar : 1500 mm
- Platforms: 800 x 300 mm
- Load length: 5 - 6 m
- Weight: 145 kgs

Ref: TR502



Heavy Duty Towing Trailers


For in-plant operation
Maximum towing speed 8 kph (5 mph)

- Fully welded steel chassis.
- Flat bed flush ply decks - sanded and coated
- 35 mm tow eye - rear hitch and pin.
- Finish Blue epoxy

- Standard extras - price on application
- Fitted side and headboards.
- Steel decks -- plain or chequer (Durbar) plate.

Double Ackerman Steering

Front and rear steering for accurate tracking in train

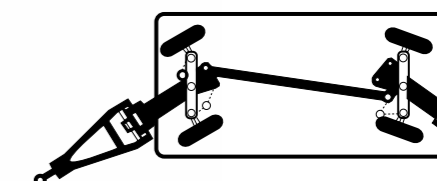

Turntable Steering

good solo manoeuvring in confined spaces

Maximum UDL	1000 Kg		2000 Kg		3000 Kg	
Deck height mm	500	500	515	550	575	720
Wheels	Solid	Pneumatic	Solid	Pneumatic	Solid	Pneumatic
Dia x tread mm	400 x 100	400 x 110	400 x 100	500 x 120	455 x 120	610 x 150
Deck 2 x 1m	Wt: 200 kg	Wt: 185 kg	Wt:220 kg	Wt:205 kg	Wt: 250 kg	Wt: 235 kg
Ref	TR601	TR601P	TR602	TR602P	TR603	TR603P
Deck 2.5 x 1.25m	Wt: 230 kg	Wt: 215 kg	Wt: 250 kg	Wt: 235 kg	Wt: 285 kg	Wt: 270 kg
Ref	TR611	TR611P	TR612	TR612P	TR613	TR613P


2000kg Pole or Timber Towing Trailer

For in-plant operation

- Heavy steel tube centre pole welded to front cross bolster and turntable top frame.
- Ball bearing turntable plates 610 mm dia.
- Rear carriage adjustable at intervals of 305 mm to give length between bolsters of 2m minimum up to 3.9 m max.
- Detachable chock posts 610 mm high.
- Distance between posts 1115 mm.

Heavy duty triangular drawbar with 35 mm dia. towing eye, locks in vertical position when not in use. 'Stop' prevents drawbar from dropping below 230 mm from the ground.

- Finish: Blue epoxy.
- Loading height: 660 mm
- Overall width: 1220 mm
- Capacity: 2000 kg



Wheels	Dia. x Tread mm	Weight Kg	Ref
Solid rubber	405 x 100	300	TR501
Pneumatic 6 ply	460 x 125	285	TR501P



Maximum UDL	1000 Kg		2000 Kg		3000 Kg	
Deck height mm	500	500	515	550	575	720
Wheels	Solid	Pneumatic	Solid	Pneumatic	Solid	Pneumatic
Dia x tread mm	400 x 100	400 x 110	400 x 100	500 x 120	455 x 120	610 x 150
Deck 2 x 1m Wt:	200 kg	185 kg	220 kg	205 kg	250 kg	235 kg
Ref	TR700	TR700P	TR710	TR710P	TR720	TR720P
Deck 2.5 x 1.25m Wt:	230 kg	215 kg	250 kg	235 kg	285 kg	270 kg
Ref	TR730	TR730P	TR740	TR740P	TR750	TR750P

Special Service

As manufacturers we are able to offer custom built trailers with many styles and types of superstructure to suit individual requirements. Alternative deck sizes and capacities also available