

Round Step

Ideal accessory for storeroom, office, workshop, library etc.

Convenient access and hands-free movement
 Moulded from high density polypropylene
 'Arched' design for extra strength
 Heavy duty rubber bumper around base for ultimate grip when weight is applied.
 Mounted on 3 spring-loaded castors, which retract when weight is applied.
 Anti-slip moulded plastic to both treads
 Max UDL: 150kg
 Dimensions (H x dia): 410 x 440mm

Ref RSK-1



48 HOUR
DESPATCH

Wheelalong Two Step with grab handle

Ideal moveable access steps for industry, offices, libraries and hospitals etc. Finished in a choice of four attractive powder coated colours. Fitted with wheels to aid moving to new location. Stable to use and Easy to Move.

Manufactured from ERW tube, with formed steel steps fitted with ribbed rubber or anti-slip treads. Fitted with 2 x 50mm wheels with rubber non-marking tyres.

Push-it along ... Pull-it along ... or carry-it along



48 HOUR
DESPATCH



Choice of colours at no extra cost

Description	Tread	Overall H x W x D mm	Top Tread mm	Weight Kgs	Ref Grey	Ref Red	Ref Blue	Ref Yellow
Two Step	R/Rubber	1030 x 500 x 355	385	8	S230/G	S230/R	S230/B	S230/Y
	Anti-slip	1030 x 500 x 355	385	8	S240/G	S240/R	S240/B	S240/Y

Folding Portable Steps

Fully welded tubular steel construction
 Fold away for space saving easy storage
 Tread size: 520 x 210mm
 Ribbed rubber treads
 Rubber GNM feet for stability and non-slip
 Finished in red or blue powder coating

Number of treads	Platform H mm	Overall in use LxWxHmm	Overall folded LxWxHmm	Weight Kgs	Ref
3	710	610 x 600 x 860	300 x 600 x 1060	18	S903
4	940	850 x 600 x 1080	300 x 600 x 1360	20	S904
5	1180	1010 x 600 x 1320	300 x 600 x 1660	23	S905



Wheelalong Two, Three and Four Steps

Static steps which are fitted with 2 x 75mm dia wheels to the rear frame. When steps are tilted, wheels allow easy movement to next location. Finished in powder coating in choice of grey, red, blue or yellow.

Fitted with 75 mm wheels with grey non marking rubber tyres.

48 HOUR
DESPATCH



Choice of colours at no extra cost

Description	Tread	Overall H x W x D mm	Top Tread mm	Weight Kgs	Ref Grey	Ref Red	Ref Blue	Ref Yellow
Two Step	R/Rubber	1025 x 455 x 605	510	7	S028/G	S028/R	S028/B	S028/Y
	Anti-slip	1025 x 455 x 605	510	7	S241/G	S241/R	S241/B	S241/Y
Three Step	R/Rubber	1310 x 455 x 785	762	10	S029/G	S029/R	S029/B	S029/Y
	Anti-slip	1310 x 455 x 785	762	10	S242/G	S242/R	S242/B	S242/Y
Four Step	R/Rubber	1700 x 590 x 1030	1020	14	S243/G	S243/R	S243/B	S243/Y
	Anti-slip	1700 x 590 x 1030	1020	14	S244/G	S244/R	S244/B	S244/Y



Tilt and Move ...

Pull-it along ...

Double Sided Mobile 2 Step


Stylish and colourful mobile two-step units with dome covered spring loaded castors, with grey non-marking tyres.

Model	2 Sided 1 Handle		2 Sided 2 Handles	
Average working height	2.00m		2.00m	
Platform height mm	460		460	
Platform width mm	355		355	
Platform depth mm	230		230	
O/all H (inc rails) mm	1035		1035	
O/all width mm	545		545	
O/all depth mm	695		695	
Weight kgs	11		13	
Treads	R/Rubber	Anti-slip	R/Rubber	Anti-slip
Green	Ref S007/GN	S008/GN	S247/GN	S249/GN
Yellow	Ref S007/Y	S008/Y	S247/Y	S249/Y
Blue	Ref S007/B	S008/B	S247/B	S249/B
Red	Ref S007/R	S008/R	S247/R	S249/R
Grey	Ref S007/GY	S008/GY	S247/GY	S249/GY

Classic Colour Range

Close fitting continuous single rail guard around top platform, extending down each side of stairway as a short handrail.

General Specification:
All Classic models are fully welded throughout and available with ribbed rubber or anti-slip treads
Finish: All colour finishes are hardwearing powder coated.

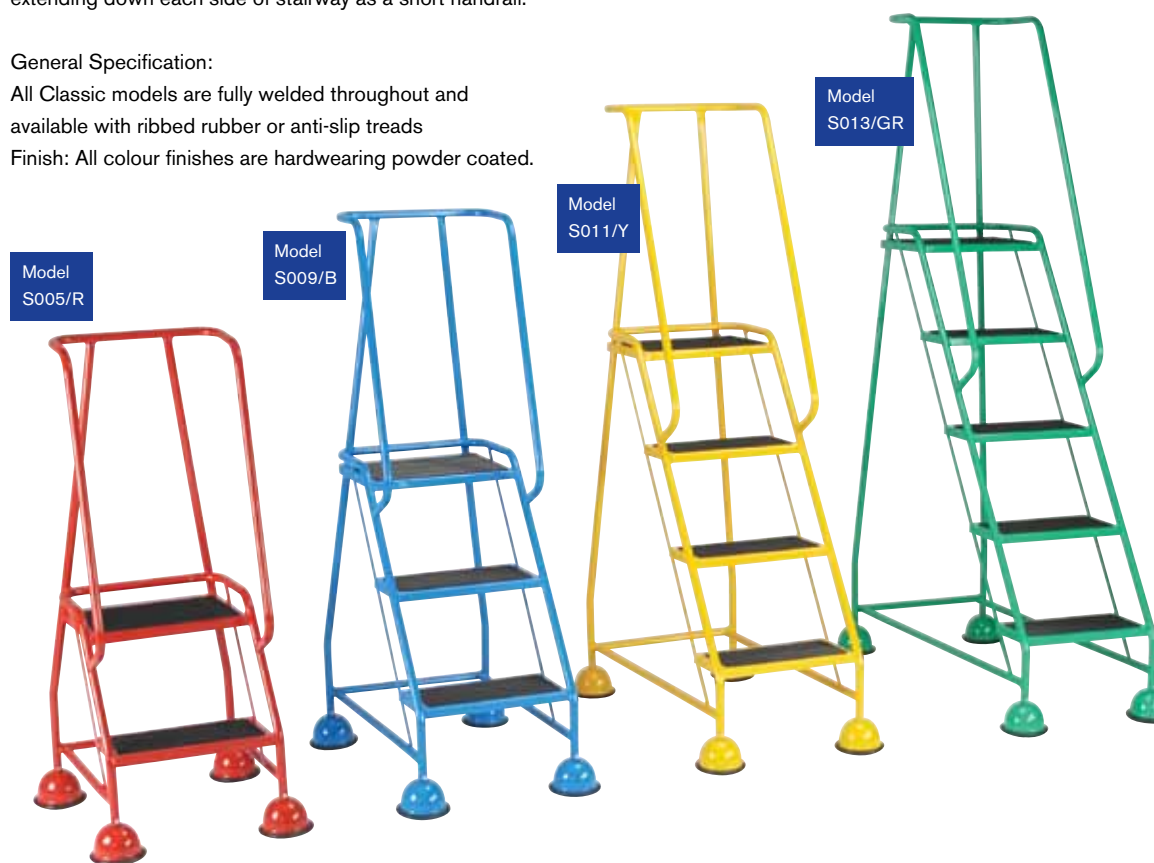

Choice of single or double grab rail
Choice of ribbed rubber or anti-slip treads
Choice of five colours

48 HOUR
DESPATCH

Single Sided Mobile 2 Step

Single sided units without handrail, single grab handle, or twin side handrails and cross bar.

Crossbar accepts optional accessories - hook-on basket or tray.



Model	1 Sided without grabrail		1 Sided 1 grabrail		1 Sided 2 handles	
Average working height	2.00m		2.00m		2.00m	
Platform height mm	508		508		508	
Platform width mm	380		380		380	
Platform depth mm	180		180		180	
O/all H (inc rails) mm	610		1185		1185	
O/all width mm	530		530		530	
O/all depth mm	540		540		540	
Weight kgs	8		10		12	
Treads	R/Rubber	Anti-slip	R/Rubber	Anti-slip	R/Rubber	Anti-slip
Green	Ref S001/GN	S002/GN	S003/GN	S004/GN	S248/GN	S251/GN
Yellow	Ref S001/Y	S002/Y	S003/Y	S004/Y	S248/Y	S251/Y
Blue	Ref S001/B	S002/B	S003/B	S004/B	S248/B	S251/B
Red	Ref S001/R	S002/R	S003/R	S004/R	S248/R	S251/R
Grey	Ref S001/GY	S002/GY	S003/GY	S004/GY	S248/GY	S251/GY
Sandstone	Ref S001/S	S002/S	S003/S	S004/S	S248/S	S251/S

Accessories

Only suitable for S248/S251

Hook-on wire basket (load capacity 3 kg)
LxWxD: 350x220x220 mm
White powder coated finish
Ref: S015



Hook-on tray unit (load capacity 3 kg)
LxWxD: 415x260x40 mm
White powder coated finish
Ref: S250



Hook-on wire basket (load capacity 3 kg)
LxWxD: 350x220x220 mm
White powder coated finish
Ref: S015



Choice of colours at no extra cost

Treads (inc platform)	2	3	4	5
Average working height	2.00m	2.26m	2.52m	2.77m
Platform height mm	508	762	1016	1270
Platform width mm	380	380	380	380
Platform depth mm	280	280	280	280
O/all H (inc rails) mm	1185	1425	1683	1940
O/all width mm	580	580	580	580
O/all depth mm	540	795	955	1120
Weight kgs	12	14	17	20
Ribbed Rubber Treads				
White	Ref S005/W	S009/W	S011/W	S013/W
Grey	Ref S005/GY	S009/GY	S011/GY	S013/GY
Light Blue	Ref S005/B	S009/B	S011/B	S013/B
Red	Ref S005/R	S009/R	S011/R	S013/R
Green	Ref S005/GN	S009/GN	S011/GN	S013/GN
Yellow	Ref S005/Y	S009/Y	S011/Y	S013/Y
Orange	Ref S005/OR	S009/OR	S011/OR	S013/OR
Sandstone	Ref S005/S	S009/S	S011/S	S013/S
Anti Slip Treads				
White	Ref S006/W	S010/W	S012/W	S014/W
Grey	Ref S006/GY	S010/GY	S012/GY	S014/GY
Light Blue	Ref S006/B	S010/B	S012/B	S014/B
Red	Ref S006/R	S010/R	S012/R	S014/R
Green	Ref S006/GN	S010/GN	S012/GN	S014/GN
Yellow	Ref S006/Y	S010/Y	S012/Y	S014/Y
Orange	Ref S006/OR	S010/OR	S012/OR	S014/OR
Sandstone	Ref S006/S	S010/S	S012/S	S014/S

Classic Castors system

Fitted with dome covered spring loaded, 50mm dia swivel castors which retract when weight is applied to the steps, giving firm contact with the floor. Grey non marking tyres. Dome covers have a double rolled bottom edge together with a protective cover strip, giving a neat appearance and reasonable protection to carpets and other floor surfaces.

Accessories

Optional Accessory

Hook-on wire basket (load capacity 3 kg)
L x W x D: 350 x 220 x 220 mm
White powder coated finish
Ref: S015



The steps should not be moved with loaded basket in place.

48 HOUR
DESPATCH



Grab rail doubles as carry handle

Model S016

Go-anywhere Two Steps - Double Sided

Ideal unit for many applications:
Office: Live filing and archives, stores and janitorial use.
Industry: Parts stores, racking at 2 m working height, machine access and general use.
Specific applications: Library shelving, supermarket shelving, retail outlets. Popular in health industry.
Strong but lightweight construction
Attractive hardwearing white powder coated finish with ribbed rubber or anti-slip treads.

Tread Surface	Platform H mm	Overall H mm	Platform WxD mm	Overall W x fr-rear mm	Weight Kgs	Ref
R/Rubber	385	1030	280 x 140	355 x 500	7	S016
Anti-slip	385	1030	280 x 140	355 x 500	7	S017

48 HOUR
DESPATCH

Classic Plus Colour Range

All models have larger top platform
Platform W x D: 400 x 380mm
Double rail platform guarding
4 and 5 step have long handrails on both sides of stairway.



Six models in a choice of six colours

Plain Steps - Single Sided



Model S020



Model S018

Manufactured from ERW tube with mild steel formed steps with ribbed rubber or anti-slip treads
Plastic feet for floor protection
Attractive hardwearing white powder coated finish.

48 HOUR
DESPATCH

Description	Tread Surface	Overall HxWxD mm	Weight Kgs	Ref
Single Step	R/Rubber	285 x 400 x 380	3	S018
	Anti-Slip	285 x 400 x 380	3	S019
Two Step	R/Rubber	440 x 450 x 695	6	S020
	Anti-Slip	440 x 450 x 695	6	S021
Two Step with Handle	R/Rubber	1160 x 450 x 695	7	S022
	Anti-Slip	1160 x 450 x 695	7	S023

Treads (inc platform)	2	2	2	3	4	5
Handrails	none	single	full	full	full	full
Platform height mm	508	508	508	762	1016	1270
O/all H (inc rails) mm	570	1175	1175	1430	1680	1935
Platform width mm	400	400	400	400	400	400
Platform depth mm	380	380	380	380	380	380
O/all width mm	550	550	550	550	550	550
O/all depth mm	650	650	650	790	1005	1225
Weight kgs	7	9	11	14	17	20
Ribbed Rubber Treads						
Red	Ref S218R	S220R	S221R	S222R	S223R	S224R
Yellow	Ref S218Y	S220Y	S221Y	S222Y	S223Y	S224Y
Blue	Ref S218B	S220B	S221B	S222B	S223B	S224B
Grey	Ref S218GY	S220GY	S221GY	S222GY	S223GY	S224GY
Green	Ref S218GN	S220GN	S221GN	S222GN	S223GN	S224GN
White	Ref S218W	S220W	S221W	S222W	S223W	S224W
Anti Slip Treads						
Red	Ref S219R	S225R	S226R	S227R	S228R	S229R
Yellow	Ref S219Y	S225Y	S226Y	S227Y	S228Y	S229Y
Blue	Ref S219B	S225B	S226B	S227B	S228B	S229B
Grey	Ref S219GY	S225GY	S226GY	S227GY	S228GY	S229GY
Green	Ref S219GN	S225GN	S226GN	S227GN	S228GN	S229GN
White	Ref S219W	S225W	S226W	S227W	S228W	S229W

Choice of colours at no extra cost

Large platform size: 400 x 380mm


Accessories

Optional Accessory

Hook-on wire basket (load capacity 3 kg)
L x W x D: 350 x 220 x 220 mm
White powder coated finish
Ref S015



Hook-on tray unit (load capacity 3 kg)
LxWxD: 415x260x40 mm
White powder coated finish
Ref: S250




The steps should not be moved with loaded basket in place.



Classic Plus - WHITE

2, 3, 4 and 5 step versions
 Large platform W x D: 400 x 380mm
 For full details see previous page

48
 HOUR
 DESPATCH



Classic Castors system

Fitted with dome covered spring loaded, 50mm dia swivel castors which retract when weight is applied to the steps, giving firm contact with the floor. Grey non marking tyres. Dome covers have a double rolled bottom edge together with a protective cover strip, giving a neat appearance and reasonable protection to carpets and other floor surfaces.

Polar 330 Range 2-3-4-5 Steps

Easily manoeuvrable steps with generous platform size.
 Retracting castor system ensures firm contact with floor when mounted.
 Plastic floor pads.
 Two-step available with or without support handle.
 Choice of ribbed rubber or anti-slip treads.
 Hard-wearing white powder coated finish.



Treads (inc platform)	2	2	3	4	5
Grabrail	Without	With	Full	Full	Full
Average working height	2m	2m	2.2m	2.4m	2.6m
Platform height mm	460	460	690	920	1155
O/all H (inc rails) mm	545	1105	1470	1700	1940
Platform width mm	457	457	457	457	457
Platform depth mm	330	330	330	330	330
O/all width mm	535	535	535	535	535
O/all depth mm	520	520	655	790	900
Weight kgs	11	12	18	20	22
Ribbed Rubber treads	Ref S034	S234	S036	S038	S238
Anti Slip treads	Ref S035	S235	S037	S039	S239

Mobile 3 and 4 Steps

Double-Sided Access

Double sided steps with handrail,
 Ribbed rubber treads or
 Anti slip tread surface available.
 Castors: spring loaded all swivel 75mm dia wheels
 with grey non marking rubber tyres.
 Finish: White powder coating.



Treads (inc platform)	3	4
Average wkg height	2.2m	2.4m
Platform height mm	685	915
Platform W x D mm	500 x 300	500 x 300
O/all height mm	1575	1805
O/all width mm	570	570
O/all length mm	800	980
Weight kgs	19	23
Ribbed rubber	Ref S030	S032
Anti-slip	Ref S031	S033

Stainless Wheelalong 2 and 3 Steps

Static steps which are fitted with 75mm dia wheels to the rear frame.
 When steps are tilted, wheels allow easy movement to next location.
 Manufactured from formed tube, and stainless steel sheet steps with anti-slip surface. 75 mm wheels fitted with grey non marking rubber tyres.

Description	Overall HxWxD mm	Top Tread mm	Weight Kgs	Ref Grey
Two step	1025 x 450 x 605	510	7	S213
Three step	1310 x 450 x 785	762	10	S214



Steptek

Stainless Steps

A selected standard range, easy to clean, for use where hygiene is essential. Particularly suitable for food, drink and chemical industries. Stainless treads have anti-slip surfaces, resistant to water, oil and most chemicals. Other models can be manufactured on request.

Stainless Steel Selection



Stainless Portable and Mobile 2 Steps

MOBILE
Manufactured from stainless steel - 304 Grade.
Retracting castor system.
Anti-slip treads.
Mountable either side so that grab handle can be rack or aisle side.
O/all front-rear: 600 mm
O/all width: 410 mm
Available with or without grab rail.

Type	Static	Mobile Without Grabrail	Mobile With Grabrail
Treads (inc platform)	2	2	2
Average wkg height	2m	2m	2m
Platform height	385 mm	460 mm	460 mm
O/all height	1030 mm	530 mm	1035 mm
Platform W x D mm	280 x 140	355 x 230	355 x 230
O/A W x Front-Rear	355 x 500	425 x 615	425 x 615
Weight kgs	7	9	10
Ref	S210	S211	S212

Portable Static
Strong stainless steel construction with anti-slip treads.

Stainless Three, Four and Five Step

High quality range of mobile step units, manufactured from formed tube and sheet stainless steel of quality particularly suitable for food drink and chemical industries. Fully welded throughout for maximum rigidity.
All step units fitted with 4 x 80mm dia spring loaded castors with grey non marking rubber tyres fitted in heavy zinc plated housing which retract when weight is applied to the steps, giving firm contact with the floor.
Anti-slip tread surfaces.
Each unit is fitted with four grey non marking rubber feet.
Stainless steel treads covered with anti-slip surface which is both hard wearing and resistant to water, oil and most chemicals.
Other stainless steel steps can be made to order, all enquiries are welcome.



Treads (inc platform)	3	4	5
Average working height	2.26m	2.52m	2.77m
Platform height mm	765	1016	1270
Platform width mm	380	380	380
Platform depth mm	280	280	280
O/all H (inc rails) mm	1425	1683	1940
O/all width mm	790	790	790
O/all depth mm	710	885	1140
Weight kgs	14	17	20
Ref	S215	S216	S217

Stainless steel mobile step units with close fitting handrail round three sides of platform.

Premier Commercial


Robust, hardworking units with spring loaded castors.
All welded steel construction
Spring loaded castors lower to the ground under operator's weight.
Red epoxy finish.
Treads: formed from sheet steel with choice of tread surfaces.

Treads (inc platform)	3	4	5
Average working height	2.21m	2.44m	2.65m
Platform height mm	685	915	1145
Platform width mm	560	560	560
Platform depth mm	340	340	340
O/all H (inc rails) mm	1530	1760	1985
O/all width mm	640	640	640
O/all depth mm	695	850	1000
Weight kgs	24	28	32
R/Rubber treads	Ref S040	S044	S048
Anti-slip treads	Ref S041	S045	S049
Punched treads	Ref S042	S046	S050
Aluminium treads	Ref S043	S047	S051

48 HOUR
DESPATCH

Steptek
Premier Commercial
3, 4 and 5 step mobiles

Tread Options

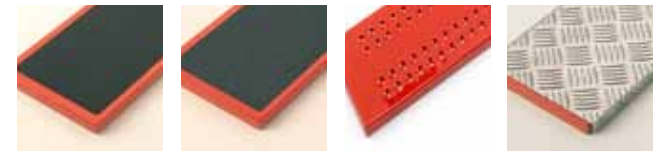

Ribbed Rubber Anti-slip Punched steel Aluminium



Mobile Steps with Retracting Castors



Model S162

Finish: All steelwork red epoxy finish
Wheels: Front 2 swivel castors with 100mm diameter rubber tyred wheels with roller bearings. Rear 2 axle mounted 200mm diameter wheels with rubber tyres and roller bearings.
Caution Notice: A caution notice is fitted to each set to remind user of operation procedure. A health and safety at work information sheet is supplied.
 Tread width 560 mm. Platform W x D: 5-9 steps 560 x 380 mm;
 10-14 steps 560 x 460 mm

Steptek Quality Red Range

560mm tread width
 Handbuilt with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.
 Welded steel tube and bar construction. Fitted with handlock anchorage; when locked the front feet rest firmly on the floor, feet fitted with protective plastic floor pads. Outboard axle mounted rear wheels gives extra stability.

Platform Gate Option

Inward opening spring loaded platform gate, with spring loaded plunger bolt, to fit at the end, or either side of the platform.
 Adds 380mm to overall length for platforms with 5-9 treads, 300mm for platforms with 10-14 treads.
Reference: S175

Accessories

Lower gate
 Fully fitted hinged gate fitted to bottom of steps (not removable) with padlock facility. Folds through 270°
Reference: S170

Hook on tool tray
 Dimensions: (L x W x D)
 600mm x 250mm x 220mm
 Load capacity: 5kg
Reference: S089


Hook on wire basket
 Dimensions: (L x W x D)
 600mm x 220mm x 220mm
 Load capacity: 5kg
Reference: S088

Handlock Anchorage

When locked the feet rest firmly on the floor.



Tread Options

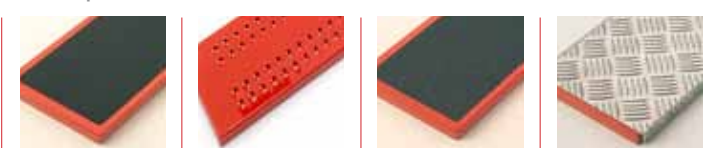

Number of Treads inc Platform	Average Working Height	Platform Height	Overall Dimension (H x W x D) mm	Ribbed Rubber Treads	Kg	Punched Treads	Kg	Anti Slip Treads	Kg	Aluminium Treads	Kg
5	2750mm	1250mm	2165x850x1220	S130	53	S140	51	S150	53	S160	54
6	3000mm	1500mm	2415x850x1400	S131	58	S141	56	S151	58	S161	60
7	3250mm	1750mm	2665x850x1580	S132	63	S142	61	S152	63	S162	65
8	3500mm	2000mm	2915x850x1760	S133	70	S143	68	S153	70	S163	73
9	3750mm	2250mm	3165x850x1940	S134	76	S144	73	S154	76	S164	78
10	4000mm	2500mm	3415x1000x2200	S135	89	S145	85	S155	89	S165	92
11	4250mm	2750mm	3665x1000x2380	S136	98	S146	94	S156	98	S166	101
12	4500mm	3000mm	3915x1000x2560	S137	110	S147	106	S157	110	S167	113
13	4750mm	3250mm	4165x1250x2740	S138	117	S148	112	S158	117	S168	121
14	5000mm	3500mm	4415x1250x2920	S139	124	S149	120	S159	124	S169	127

15-20 please ask for details

Steptek Quality Blue Range


Choice of 610mm or 760mm tread width
 Hand built with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.
 All steelwork blue epoxy finish.
Wheels: Front swivel and rear fixed castors with 100 mm dia. white nylon wheels. Roller bearings.
 All models fitted with hand lock anchorage, when locked the front feet rest firmly on the floor; fitted with protective plastic floor pads.

Accessories

Hook on wire basket
 Dimensions: (L x W x D)
 600mm x 220mm x 220mm
 Load capacity: 5kg
Reference: S088 (Extra)

Hook on tool tray
 Dimensions: (L x W x D)
 600mm x 250mm x 220mm
 Load capacity: 5kg
Reference: S089 (Extra)

Tread Options

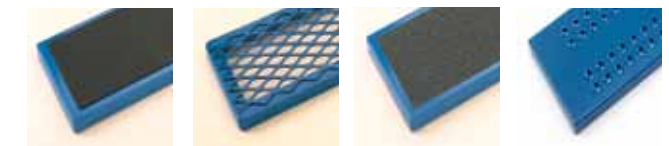

Ribbed Rubber Expamet Anti-slip Punched Steel

Tread width 610 mm / Platform W x D 610 x 457 mm

Number of Treads inc Platform	Average Working Height	Platform Height	Overall Dimension (H x W x D) mm	Ribbed Rubber Treads	Kg	Expamet Treads	Kg	Anti Slip Treads	Kg	Punched Treads	Kg
4	2400 mm	915	1830 x 760 x 1085	S052	45	S061	45	S070	45	S079	43
5	2700 mm	1145	2060 x 760 x 1260	S053	50	S062	50	S071	50	S080	48
6	2900 mm	1370	2285 x 760 x 1435	S054	56	S063	56	S072	56	S081	53
7	3100 mm	1600	2515 x 760 x 1690	S055	65	S064	65	S073	65	S082	62
8	3400 mm	1830	2745 x 760 x 1865	S056	70	S065	70	S074	70	S083	67
9	3600 mm	2060	2975 x 760 x 2045	S057	76	S066	76	S075	76	S084	73
10	3800 mm	2285	3200 x 760 x 2225	S058	88	S067	88	S076	88	S085	84
11	4000 mm	2515	3430 x 760 x 2400	S059	96	S068	96	S077	96	S086	91
12	4300 mm	2745	3660 x 760 x 2580	S060	104	S069	104	S078	104	S087	99

Tread width 610 mm / Platform W x D 610 x 457 mm

Number of Treads inc Platform	Average Working Height	Platform Height	Overall Dimension (H x W x D) mm	Ribbed Rubber Treads	Kg	Expamet Treads	Kg	Anti Slip Treads	Kg	Punched Treads	Kg
5	2700 mm	1145	2060 x 915 x 1260	S090	60	S100	56	S110	60	S120	58
6	2900 mm	1370	2285 x 915 x 1435	S091	66	S101	62	S111	66	S121	64
7	3100 mm	1600	2515 x 915 x 1690	S092	76	S102	72	S112	76	S122	74
8	3400 mm	1830	2745 x 915 x 1865	S093	84	S103	79	S113	84	S123	82
9	3600 mm	2060	2975 x 915 x 2045	S094	91	S104	86	S114	91	S124	88
10	3800 mm	2285	3200 x 915 x 2225	S095	105	S105	99	S115	105	S125	102
11	4000 mm	2515	3430 x 915 x 2400	S096	114	S106	107	S116	114	S126	110
12	4300 mm	2745	3660 x 915 x 2580	S097	123	S107	115	S117	123	S127	118
13	4500 mm	2975	3890 x 915 x 2755	S098	130	S108	122	S118	130	S128	127
14	4700 mm	3200	4115 x 915 x 2935	S099	138	S109	130	S119	138	S129	134



Retracting Castors fitted as standard.



Steptek Quality Extra Heavy Duty Range

Capacity: 200kg
Tread width: 490mm
Platform W x D: 540 x 500mm

Hand built with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.

Construction: Welded heavy gauge steel box section and bar.
Fitted with hand lock lever anchorage; when locked, the front feet rest firmly on the floor, feet fitted with protective grey non-marking rubber feet. Safety warning bar fitted to protrude in front of steps, linked to hand lock lever mechanism, to deter users from climbing steps when still in 'mobile' mode.

Stability base model
Outboard wheels mounted on splayed base frame gives superior stability.
Narrow base model Outboard wheels mounted on straight base frame for optimum space saving requirements.

Finish: Main structure red epoxy finish; safety bar and hand lever mechanism in safety yellow.

Wheels: Front 2 swivel castors with 100 mm dia. rubber tyred wheels, with roller bearings. 2 rear axle mounted 200mm dia. wheels with rubber tyres and roller bearings.

A caution notice is fitted to remind user of operation procedure
A health and Safety at Work information sheet is supplied.

Options



Platform gate

Only available on narrow base models.
Inward opening spring loaded platform gate, with spring loaded plunger bolt, to fit at the end, or either side of the top platform. Gate closes against vertical retention plate. Adds 260mm to platform and o/a length

Ref S175 (Extra)



Lower gate


Fully welded hinged steel tube gate fitted to bottom of steps (not removable). Gate folds back through 270°. Fitted with padlock facility (padlock not supplied).

Ref S170 (Extra)

Tread options:



Ribbed rubber



Expamet

Number of Treads inc Platform	Average Working Height	Stability base models				Narrow base models						
		Platform Height	Overall Dimension (H x W x D) mm	Ribbed Rubber Treads	Kg	Platform Height	Overall Dimension (H x W x D) mm	Ribbed Rubber Treads	Kg			
3	2190 mm	690	1690 x 780 x 955	S920	56	S940	48	1690 x 700 x 930	S960	51	S980	43
4	2420 mm	920	1920 x 850 x 1120	S921	64	S941	56	1920 x 700 x 1140	S961	59	S981	51
5	2650 mm	1150	2150 x 910 x 1290	S922	74	S942	62	2150 x 700 x 1240	S962	69	S982	57
6	2880 mm	1380	2380 x 960 x 1425	S923	93	S943	81	2380 x 700 x 1410	S963	88	S983	76
7	3110 mm	1610	2610 x 1010 x 1610	S924	102	S944	89	2610 x 700 x 1570	S964	97	S984	84
8	3340 mm	1840	2840 x 1060 x 1790	S925	112	S945	99	2840 x 700 x 1740	S965	107	S985	94
9	3570 mm	2070	3070 x 1140 x 1955	S926	122	S946	109	3070 x 700 x 1900	S966	117	S986	104
10	3800 mm	2300	3300 x 1220 x 2130	S927	136	S947	124	3300 x 900 x 2060	S967	131	S987	119
11	4030 mm	2530	3530 x 1270 x 2290	S928	145	S948	132	3530 x 900 x 2230	S968	140	S988	127
12	4260 mm	2760	3760 x 1270 x 2290	S929	157	S949	143	3760 x 900 x 2400	S969	151	S989	138
13	4490 mm	2990	3990 x 1370 x 2455	S930	168	S950	153	3990 x 1230 x 2560	S970	163	S990	148
14	4720 mm	3220	4220 x 1540 x 2790	S931	180	S951	165	4220 x 1230 x 2730	S971	175	S991	160
15	4950 mm	3450	4450 x 1565 x 2975	S932	192	S952	177	4450 x 1230 x 2890	S972	187	S992	172

Steptek Easy Rise Range with Handlock Anchorage

760mm tread width

Hand built with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.

48 degree slope for extra safety and comfort

Designed to allow user to turn and descend the steps facing forward

Welded steel tube and bar construction.
Fitted with hand lock anchorage; when locked the front feet rest firmly on the floor, feet fitted with protective plastic floor pads.

Finish: All steelwork red epoxy finish.
Wheels: Front 2 swivel castors with 100 mm dia. rubber tyred wheels with roller bearings. Rear 2 axle mounted 200 mm dia. wheels with rubber tyres and roller bearings.

Accessories



Hook on wire basket
Dimensions: (L x W x D)
600mm x 220mm x 220mm
Load capacity: 5kg
Reference: S088 (Extra)



Hook on tool tray
Dimensions: (L x W x D)
600mm x 250mm x 220mm
Load capacity: 5kg
Reference: S089 (Extra)



Tread width 760 mm

Platform W x D: 760 x 380 mm (5-9 tread)

Platform W x D: 760 x 460mm (10-12 tread)



Number of Treads inc Platform	Average Working Height	Platform Height	Overall Dimension (H x W x D) mm	Ribbed Rubber Treads	Kg	Anti-Slip Treads	Kg	Expamet Treads	Kg	Punched Treads	Kg	Aluminium Treads	Kg
5	2650 mm	1150	2065 x 980 x 1400	S601	80	S611	80	S621	80	S631	78	S641	82
6	2880 mm	1380	2295 x 980 x 1600	S602	88	S612	88	S622	88	S632	86	S642	91
7	3110 mm	1610	2525 x 980 x 1800	S603	96	S613	96	S623	96	S633	94	S643	99
8	3340 mm	1840	2755 x 980 x 2000	S604	104	S614	104	S624	104	S634	102	S644	108
9	3570 mm	2070	2985 x 980 x 2200	S605	112	S615	112	S625	112	S635	110	S645	117
10	3800 mm	2300	3215 x 1150 x 2400	S606	132	S616	132	S626	132	S636	130	S646	138
11	4030 mm	2530	3445 x 1150 x 2600	S607	142	S617	142	S627	142	S637	140	S647	149
12	4260 mm	2760	3675 x 1150 x 2800	S608	152	S618	152	S628	152	S638	150	S648	160

Easy-rise Steps with truck/dock platform



48 degree slope for extra safety and comfort
750 x 1200mm platform
Designed to allow user to descend the steps facing forward

Large platform with removable chain on end and both sides for 3-sided access.
Welded steel tube and bar construction.
Fitted with handlock anchorage.
Front feet, fitted with protective plastic floor pads
Expamet treads and large working top platform makes them ideal for loading and unloading items outside.
Wheels: 2 front swivel castors with 100mm dia rubber tyred wheels with roller bearings
2 rear axle-mounted 200mm wheels with rubber tyres and roller bearings.
Finish: All steelwork red epoxy or galvanised finish

Tread width 750 mm / Platform W x D: 750 x 1200 mm

No. of Treads (inc platform)	Average working height mm	Platform height mm	Overall (H x W x D) mm	Red Expamet		Galvanised Expamet	
				Ref	Wt. Kg	Ref	Wt. Kg
4	2420 mm	920	1910 x 960 x 1870	S681	89	S691	89
5	2650 mm	1150	2140 x 960 x 2060	S682	98	S692	98
6	2880 mm	1380	2370 x 960 x 2250	S683	107	S693	107

Hand built with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.



Tilt and Go Steps

Welded steel tube and bar construction.
Expamet treads and large working top platform makes them ideal for loading and unloading items outside.

The steps have 2 handles at the front, fitted with knuckle guard hand grips for safe lifting and moving.

Wheels: 2 rear 200mm steel centred wheels with rubber tyres and roller bearings.



Tread width 500 mm / Platform W x D: 500 x 600 mm

No. of Treads (inc platform)	Average working height mm	Platform height mm	Overall (H x W x D) mm	Blue Expamet		Galvanised Expamet	
				Ref	Wt. Kg	Ref	Wt. Kg
3	2250 mm	750	1760 x 650 x 1345	S701	36	S711	36
4	2500 mm	1000	2010 x 650 x 1535	S702	41	S712	41
5	2750 mm	1250	2260 x 650 x 1725	S703	46	S713	46
6	3000 mm	1500	2510 x 650 x 1915	S704	51	S714	51



Option
Inward opening gate on platform end.
Ref S700 (Extra).

Step Tray Trolleys - 3 Step

Ideal for stock picking and putting away in stores, warehouse, office, library etc.

Spring loaded step unit, with ribbed rubber treads, locates firmly on floor when foot placed on first step, immobilising trolley.
Top tread height 686mm.
Fully welded construction, from RSA angle and ERW tube.
Rubber feet fitted to step unit.
Blue epoxy finish.

Medium Duty
125kg total load capacity 2 and 3 tray
Heavy Duty
175kg total load capacity 2 and 3 tray



Model S183



Model S185



Model S186

Medium Duty Castors:
4 stem fitting swivel castors with 125mm dia. wheels with grey non marking tyres and thread guards.



Model S192


Heavy Duty Castors:
2 swivel and 2 fixed castors with 125mm dia rubber tyred wheels with roller bearings.

Tray options (For medium or heavy duty trolleys)

Fixed sheet steel trays with 20mm lip all round, blue epoxy finish.
Fixed plywood shelves, recessed with 10mm lip all round.

Removable steel trays, reversible to give either a flush finish, or 25mm lip all round, white powder coated finish.
Removable wire baskets with 160mm high sides, white powder coated finish.

Tray Type	Duty	Cap. Kg	No. of Tiers	Tray Heights mm			Usable W x L mm	Overall H x W x L mm	Wt. Kg	Ref
				Top	Middle	Bottom				
Fixed blue trays	Medium	125	2	920	-	310	465 x 780	1150x 495 x 1325	33	S180
		125	3	920	615	310	465 x 780	1150x 495 x 1325	40	S181
	Heavy	175	2	955	-	180	465 x 780	1070x 475 x 1325	36	S188
		175	3	955	570	180	465 x 780	1070x 475 x 1325	43	S189
Fixed plywood shelf	Medium	125	2	920	-	310	465 x 780	1150x 495 x 1325	30	S182
		125	3	920	615	310	465 x 780	1150x 495 x 1325	35	S183
	Heavy	175	2	955	-	180	465 x 780	1070x 475 x 1325	33	S191
		175	3	955	570	180	465 x 780	1070x 475 x 1325	38	S192
Reversible white trays	Medium	125	2	920	-	310	455 x 770	1150x 495 x 1325	34	S184
		125	3	920	615	310	455 x 770	1150x 495 x 1325	42	S185
	Heavy	175	2	955	-	180	455 x 770	1070x 475 x 1325	38	S194
		175	3	955	570	180	455 x 770	1070x 475 x 1325	46	S195
Removable baskets	Medium	125	2	1060	-	450	450 x 755	1150x 495 x 1325	31	S186
		125	3	1060	755	450	450 x 755	1150x 495 x 1325	37	S187
	Heavy	175	2	1095*	-	320*	450 x 755	1095x 475 x 1325	33	S197
		175	3	1095*	710*	320*	450 x 755	1095x 475 x 1325	39	S198

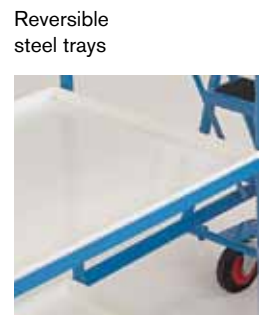

* Dimension to top of basket. Recommended working height with Steptek models is 1.5m from top tread



Model S193

Heavy Duty Step Tray Trolleys - 5 step

Capacity 175kg UDL

3 tray tiers - 5 steps

Top tread height 1145mm.

Castors: Fitted with 2 retractable castors in front and 2 fixed castors to rear, each with 125mm rubber tyred wheels and roller bearings.

Operation: Front castors retract with hand operated lever to immobilise trolley.

Steps: Fixed steps, handrail fitted to each side and across top.

Construction: Fully welded from RSA angle and ERW tube.

Finish: Blue epoxy

Tray options:

Fixed sheet steel trays with 20mm lip all round, blue epoxy finish.

Fixed plywood shelves, recessed with 10mm lip all round.

Removable steel trays, reversible to give either a flush finish, or 25mm lip all round, white powder coated finish.

Removable wire baskets with 160mm high sides, white powder coated finish.



Model S196



Model S199

Reversible steel trays

Removable wire baskets



Tray type	Tray heights mm			Usable W x L mm	Overall H x W x L mm	Wt. Kg	Ref
	Top	Middle	Bottom				
Fixed blue trays	1115	650	185	525 x 935	2075x 620x 1730	67	S190
Fixed ply shelves	1115	650	185	525 x 935	2075x 620x 1730	61	S193
Reversible white trays	1115	650	185	510 x 920	2075x 620x 1730	71	S196
Removable baskets	1245*	785*	320*	500 x 905	2075x 620x 1730	61	S199

*Dimension to top of basket. Maximum recommended step load is 120kg (operator and goods carried) Trolley capacities as stated.

Book Trolley

Capacity 250kg UDL

Popular design for libraries, offices, classrooms, laboratories etc.

Double sided with angled shelves

Tubular steel frame with sheet steel shelves.

Clearance between shelves: 345mm

Overall L x W x H: 880 x 550 x 1115mm

Fitted with 4 swivel castors 125mm,

grey non-marking tyres and thread guards.

Weight: 37kg

Red Ref TT26/R

Green Ref TT26/G

Yellow Ref TT26/Y

Blue Ref TT26/B

Colour options:



Optional extras

Total stop brakes: Ref B052 (pair)

Revolving buffer corners: Ref B172 (set)