


## FLOPLAST INTUMESCENT PIPE WRAPS

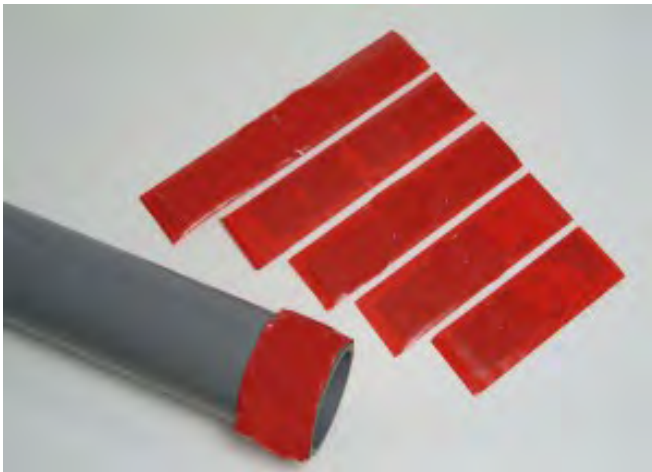

Economical

Easy to Fit

Unaffected by moisture, humidity or frost

BS476: Part 20: 1987

EN1366-3

Up to 4 hours fire resistance

LANTAC Building Control Approval


### Description

Flexible strips of high performance intumescent material encapsulated in a polythene sleeve – designed for wrapping around plastic pipes that pass through masonry floors and walls. On exposure to fire the wrap expands rapidly inwards to squeeze the collapsing plastic pipe until the aperture is completely sealed.

The wraps have been independently tested in accordance with BS476: Part 20: 1987 and can provide up to 4 hours fire resistance.

Also tested to EN1366-3, LANTEC Building Control Approval and NHBC Type Approval.

FloPlast Pipe Wraps are economical, easy to fit and are unaffected by moisture, humidity, or frost, but care should be taken so as to avoid damaging the outer polythene sleeve.

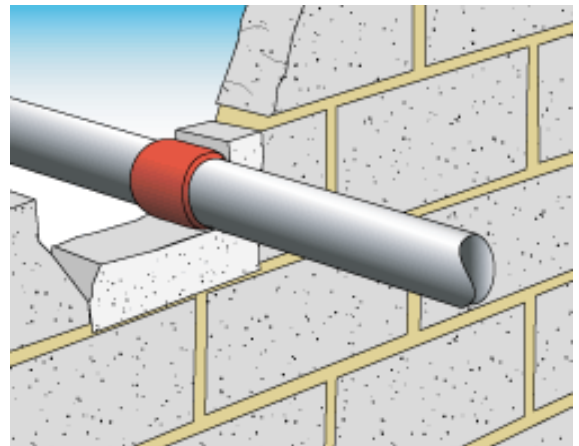

### Availability

FloPlast Fire Collars are available in sizes up to 160mm

### Packing

Available in any order quantity

### Fire Test and Assessment Reports

BS476: Part 20: 1987

EN1366-3

LANTAC Building Control Approval

NHBC Type Approval

## **Health and Safety**

The product does not present any known health hazards during or after installation. Normal good industrial and personal hygiene practises should be observed.

## **Installation**

Manufactured to the correct length, the wrap should be tightly wrapped around the pipe and secured in position using the tabs located at the edge of the wrap. Push the wrap into the void so that the edge is flush with the floor or wall, it is important for the proper functioning of the wrap that the edge is exposed to view.

## **Issue 09/07**

As part of our policy of ongoing improvements, we reserve the right to modify, alter or change product specifications without giving notice. Product illustrations are representations only. All information contained in this document is provided for guidance only, and as FloPlast Limited has no control over the installation methods of the products, or of the prevailing site conditions, no warranties expressed or implied are intended to be given as to the actual performance of the products mentioned or referred to, and no liability whatsoever will be accepted for any loss, damage or injury arising from the use of the information given of products mentioned or referred to herein.

The above information to the best of our knowledge is true and accurate and based upon current test data and is supplied for your guidance only. Customers should satisfy themselves to the suitability of the product in its intended use and no guarantee is given or implied since the conditions of actual use are beyond our control. FloPlast Limited, disclaim any liability for loss, damage or other expense arising from the use of information, data or products mentioned or referred to and reserve the right to change any details or specifications without notice.

FloPlast Limited. Castle Road, Eurolink Business Park,  
Sittingbourne, Kent ME10 3FP

Tel: 01795 431731      Fax: 01795 31188

Email: [sales@floplast.co.uk](mailto:sales@floplast.co.uk)