

# Weber UK Axle Stands


A comprehensive range of Commercial-Duty Axle Stands with various capacities from 2 Tonnes up to 24 Tonnes per pair incorporating the following height specifications:-

- Low (Pin/Chain and Screw-Type)
- Standard
- High
- Extra High
- Commercial Support Stands (Screw-Type)

All Weber Axle Stands are supplied passivated with zinc-plated support columns. Each model is fitted with base plates to ensure even distribution of the load.




## STANDARD MODELS (Rated and sold in Pairs)

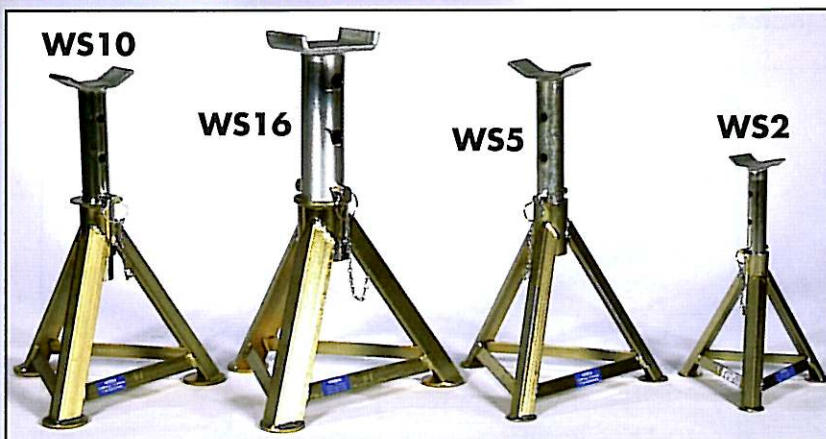

Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS2	2	255	400	5.4
WS5	5	350	560	10.7
WS10	10	360	615	14.3
WS16	16	370	615	20.0

## HIGH MODELS (Rated and sold in Pairs)


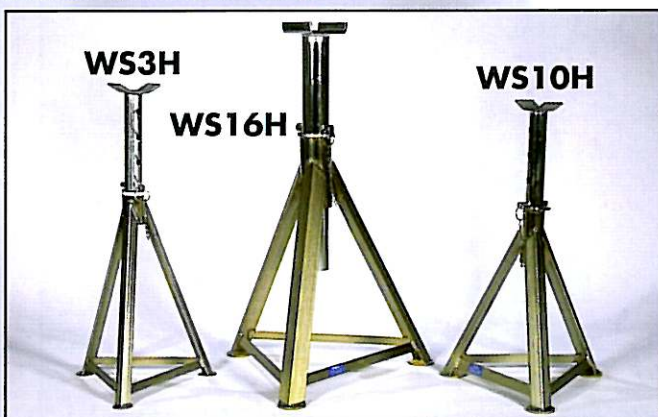


Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS3H	3	520	820	14.0
WS10H	10	520	770	17.0
WS16H	16	705	1110	36.0

## LOW MODELS (Rated and sold in Pairs)



Designed specifically for all Low-Entry applications

Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS24LS	24	200	290	19kg
WS24L	24	300	500	20kg

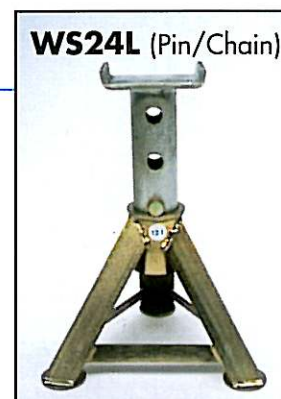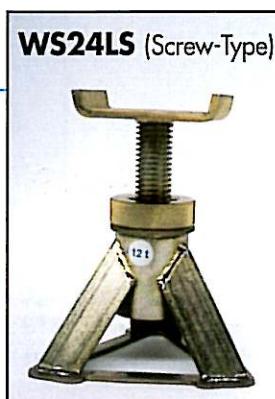



# Axle Stands

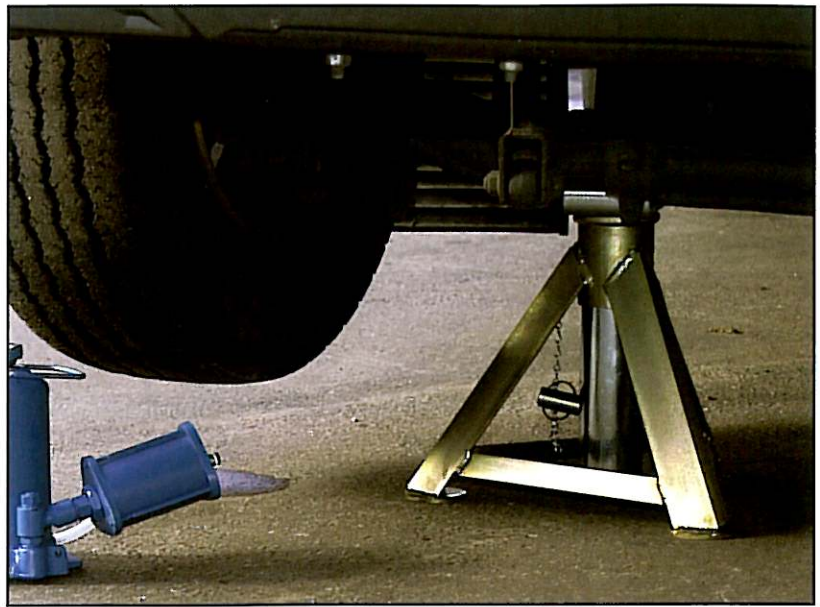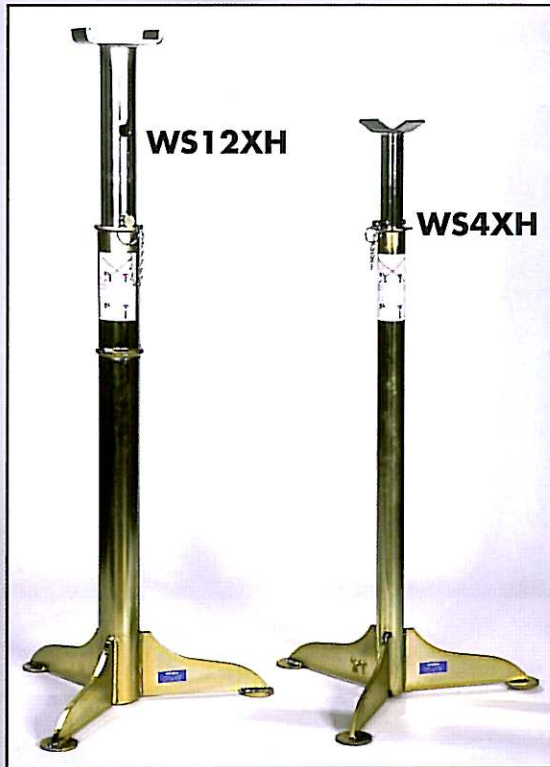

**EXTRA-HIGH MODELS**  
(Chassis Stands)  
(Rated and sold in Pairs)

Model No	Capacity Per Pair Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WS4XH	4	1041	1803	31.3
WS12XH	12	1035	1778	46.5

## COMMERCIAL-DUTY SCREW TYPE SUPPORT STANDS

Suitable for use with Mobile Column Lifts  
(Rated and sold in Single Units)

**FEATURES**

- 6 Tonnes (Per Stand)
- Designed for Heavy-Duty applications
- Passivated finish for protection
- 100% Screw Adjustment - secured in any position
- Fitted with Transporter Wheels for manoeuvrability

Model No	Capacity Per Stand Tonnes	Min Height mm	Max Height mm	Weight Per Pair kg
WSC6L (LOW)	6 Per Stand	850	1450	45.0
WSC6H (HIGH)	6 Per Stand	1460	2080	51.0

