


VA	w	h	d	fi	fo	fd	fs	kg
25*	94	83	70	54	/	39	4x8	0.75
50*	105	88	63	54	/	45	4x8	1.0
100*	113	102	69	57	/	43	4x8	1.4
150	98	103	115	64	80	58	4x8	3.0
250	118	128	115	63	95	60	5x10	3.8
300	118	128	121	63	95	66	5x10	4.5
400	118	128	133	63	95	78	5x10	5.6
500	137	134	130	89	112	70	6x10	6.6
750	137	134	143	89	112	83	6x10	8.1
1000	137	134	155	89	112	95	6x10	9.5
1,500	167	157	145	89	119	93	7x12	12.3
2,000	167	157	181	89	119	130	7x12	18.1
3,000	182	237	165	155	/	110	6x15	23.4
4,000	182	237	178	155	/	123	6x15	26.8
5,000	182	237	191	150	/	140	6x15	31.5
6,000	270	237	200	150	/	140	10x25	45.1
7,500	286	271	215	150	/	145	10x25	55.4
10,000	286	271	240	150	/	169	10x25	62.3

* c clamp

Width (w)

Power Transformers

All dimensions in mm

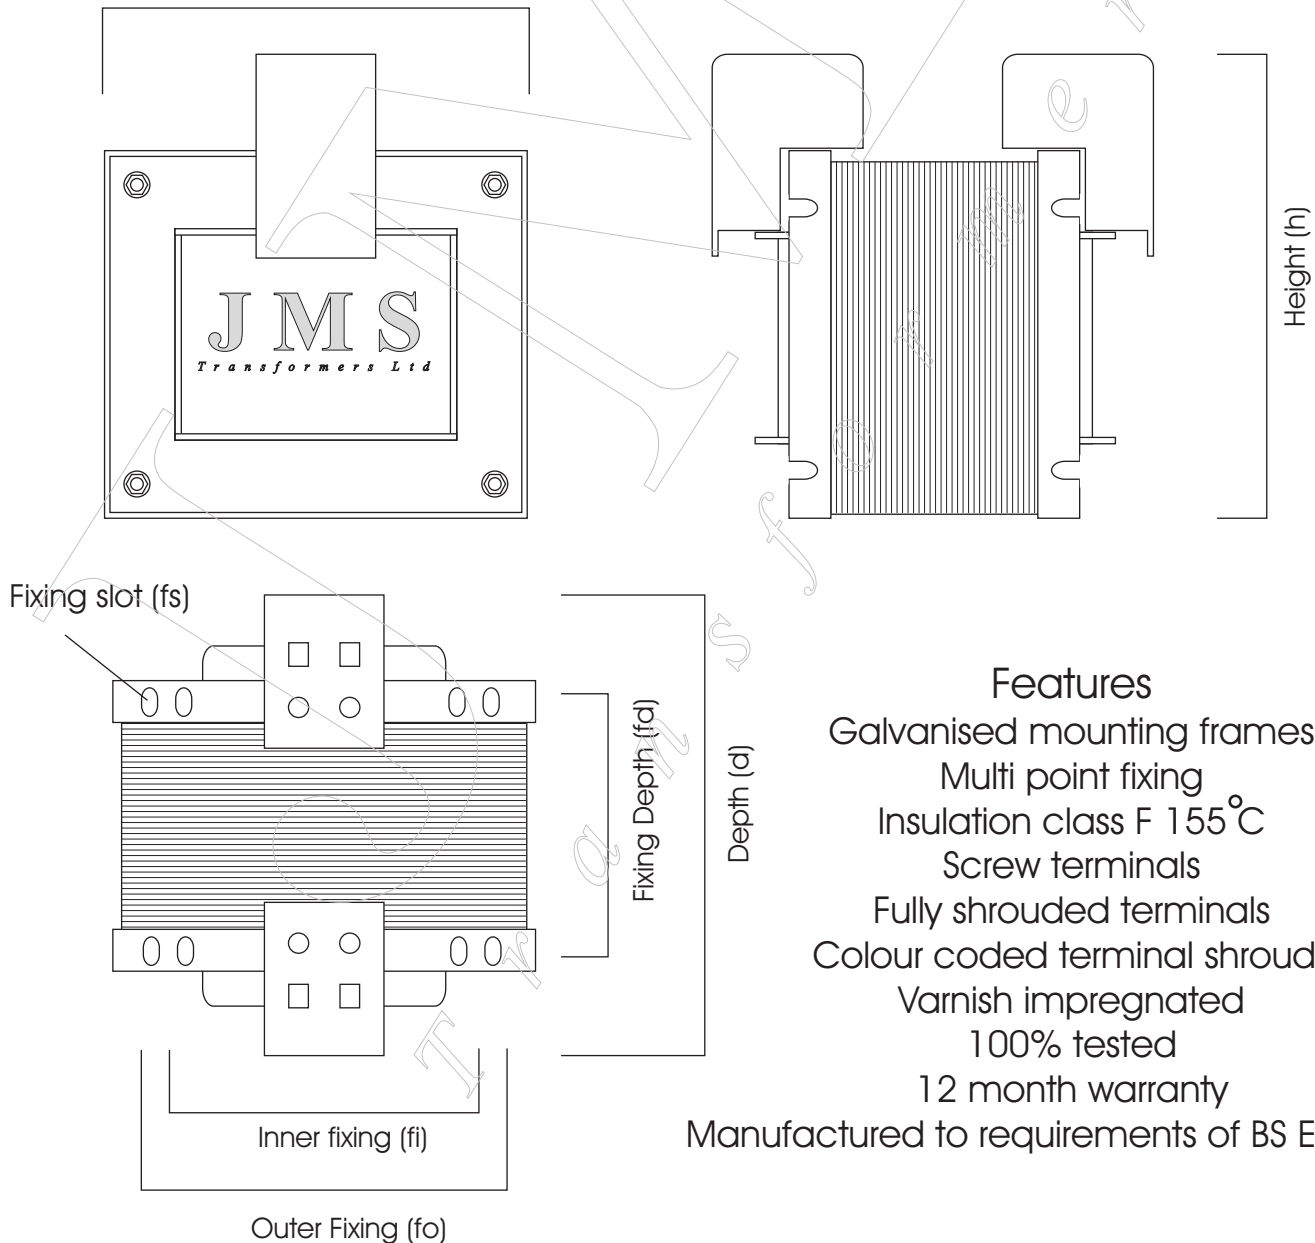

Features

- Galvanised mounting frames
- Multi point fixing
- Insulation class F 155°C
- Screw terminals
- Fully shrouded terminals
- Colour coded terminal shrouds
- Varnish impregnated
- 100% tested
- 12 month warranty

Manufactured to requirements of BS EN 60742