

Quality is more than a word

ESPEC

Thermal Shock Chamber

TSE-11-A



ESPEC offers a compact, but high performance thermal shock chamber ideal for the requirements of test standards of small and low-volume specimen.

Equipped with superior temperature recovery performance capable of answering the requirements of severe test specifications, this thermal shock model offers a wide test area in a compact, slim design.



User-friendly

A high performance compact package to meet severe test requirements.

- **A temperature recovery time of less than 5 minutes is achieved in 2 zones (+150°C and -65°C) without auxiliary cooling.**

By realizing a temperature recovery time of less than 5 minutes for the upstream air in the 2 zones (+150°C and -65°C), we have achieved performance equivalent to that of a large thermal shock chamber without having to use auxiliary cooling by means of liquid carbon dioxide, which was required in previous compact thermal shock chamber.

- **Complies with MIL-STD-883E and other test standards.**

This compact thermal shock chamber satisfies the temperature cycle test requirements of MIL-STD-883E and other test standard (see page 5).

- **Vibration shock to samples is minimized during movement of the test area.**

The soft-move mode is used to reduce vibration shock when specimens are moving from the high-temperature chamber to the low-temperature chamber in the test area.

- **Uniform temperature distribution across specimens.**

High temperature uniformity performance ensures consistent stress on specimens.



High-temperature exposure

Low-temperature exposure


● Examples of temperature uniformity

• Test conditions

High temperature exposure +150°C 30 min
Low temperature exposure -65°C 30 min
Specimen Plastic molded IC 2kg

• Temperature uniformity measurement method

Thermocouples were embedded in 10 plastic molded ICs (16 pin DIPs), which were then placed on two levels in each of the corners and in the center of a specimen basket.

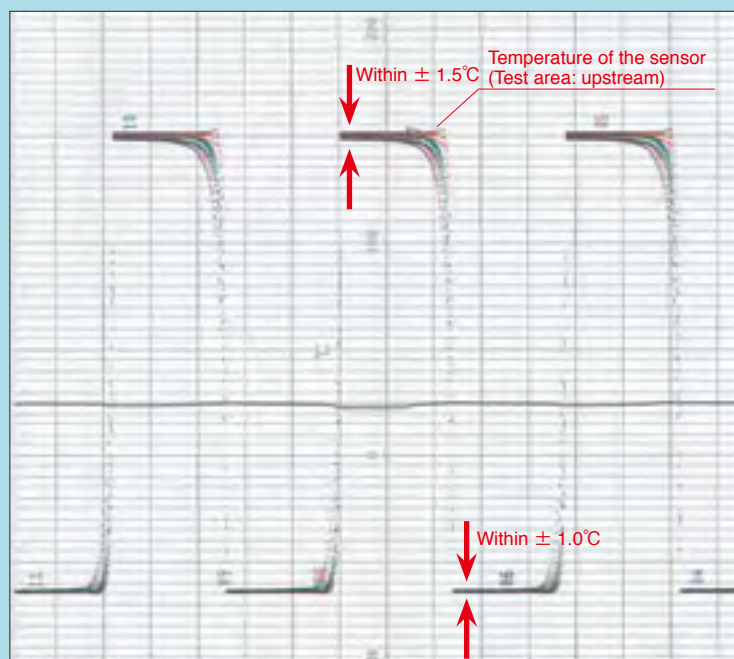




Control panel

Instrument specification

Setting	Interactive key input by touch panel
Display	TFT Color LCD
Number of test patterns	RAM (selected entry): a maximum of 40 patterns can be entered ROM (built-in): contains 10 test standard patterns
Auxiliary functions	<ul style="list-style-type: none"> · Test continuity selection · Overheat/overcool protection · Stable time control · Automatic defrost · Test halt preset · Automatic power shut-off · Trend graph display · Time signal · RS-485 · Timer preset · Sensor traceability · Power failure/recovery operation selection · Programmed time display · Test completion mode selection · Exposure time reduction · Alarm history display · Program memory

● Test area

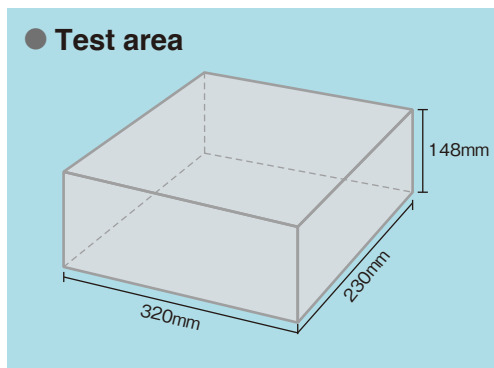

Cable port (50mm, shown with cap installed)

● Uses a color LCD interactive touch-screen system employed throughout the Thermal Shock Chamber Series.

A color LCD panel design is employed that allows easy settings by just touching the screen in accordance with the display. The test pattern, test area temperature, number of temperature cycles, upstream/downstream control, trend graph display are all displayed on the visible screen.

● Large 10.9-liter-capacity test area

Features a 10.9-liter test area, twice that of our previous model. The volume that can be processed is greatly increased, and a 210 × 297mm printed circuit board can be tested in the horizontal position.

● A mechanism to prevent specimen from dropping.

In addition to the drive unit brake, there is other protection mechanism to prevent specimens from dropping in the test area when the chamber stops operation.

● Easy wiring for applying power or measuring specimens.

A cable port is provided on the side to allow easy wiring of specimens for measurement during high and low-temperature cycle tests.

● Total safety measures.

Test area drive is automatically halted when door is opened, and it is automatically locked during operation. Other redundant safety mechanisms are also used to ensure user safety.

● Equipped with casters for mobility

Eco-friendly

Incorporates many features for environmental protection (energy conservation, recycling, ozone layer protection)

● Reduced power consumption

Reduced power consumption is an important issue for our customers. This compact thermal shock chamber employs number of measures such as refrigeration capacity variable control by electronic auto-expansion valve and the use of a titanium interior material aimed specifically at energy savings.

● Small footprint



Vertical design saves space. Required installation space is only 26 inch.

● Material indication for recycling

Environmental protection measures have been taken such as indicating materials on plastic molded parts and employing a structure that makes it easy to remove recyclable parts to accommodate future recycling of the unit.

● Paperless Recording (optional)

The paperless recorder makes it easy record the temperatures of different components, such as the chamber temperature, on a memory card (Compact Flash).

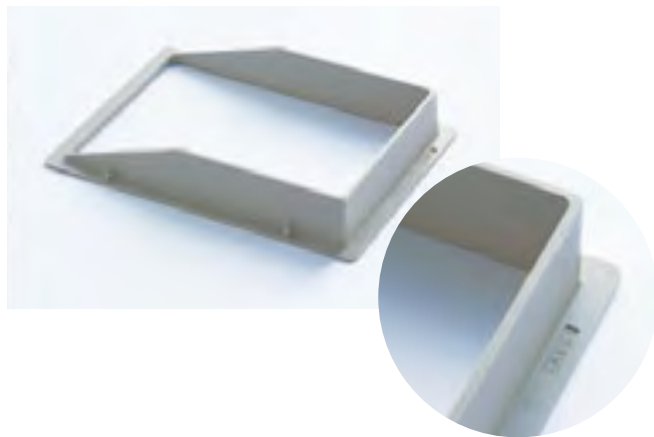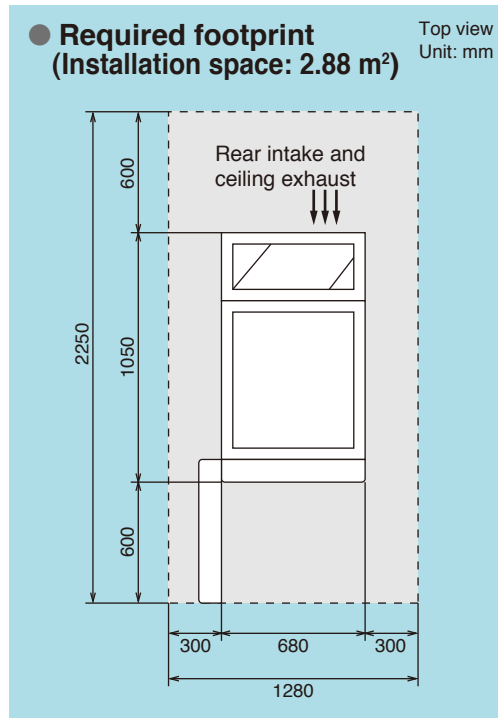

Paperless recorder (optional)

TEST STANDARD (TSE-11-A compliant)

Test standard	Exposure temperature			Exposure time		Temp. recovery time	Number of cycles	Test starting point	
	High temp.	Ambient temp.*	Low temp.	High/ low temp.	Ambient temp.*				
MIL-STD-883E (Method No. 1010.7)	A	+ 85°C +10 0	—	- 55°C -10 0	more than 10 min.	—	Specimen temp within 15 min. at worst condition	Minimum 10 cycles	Low or high temp.
	B	+ 125°C +15 0							
	C	+ 150°C +15 0							
	D	+ 200°C +15 0							
	F	+ 175°C +15 0							
JIS C 0025	+ 70°C ±2 + 85°C ±2 + 100°C ±2 + 125°C ±2 + 155°C ±2 + 175°C ±2 + 200°C ±2	Ambient temp.	- 5°C ±3 - 10°C ±3 - 25°C ±3 - 40°C ±3 - 55°C ±3 - 65°C ±3	3 hours 2 hours 1 hour 0.5 hour 3 hours if not specified	less than 10 sec.	less than 10% of exposure time	5 cycles if not specified	Low temp.	
JASO D 001	1	+ 85°C	Ambient temp.	- 40°C	Less than 0.2 kg 1 hour +15 min. 0	Short exposure is recommendable	Upstream of specimen within 5 min.	6 cycles	High temp.
	2	+ 75°C			0.2~0.8 kg 2 hours +15 min. 0				
	3	+ 120°C			0.8~1.5 kg 3 hours +15 min. 0 More than 1.5 kg 4 hours +15 min. 0				
EIAJ ED-2531A	+ 60°C ±2 + 65°C ±2 + 70°C ±2 + 75°C ±2 + 80°C ±2 + 85°C ±2 + 90°C ±2 + 95°C ±2 + 100°C ±2	Ambient temp.	0°C ±3 - 5°C ±3 - 10°C ±3 - 15°C ±3 - 20°C ±3 - 25°C ±3 - 30°C ±3 - 35°C ±3 - 40°C ±3 - 45°C ±3 - 50°C ±3	3 hours 2 hours 1 hour 0.5 hour 3 hours if not specified	less than 10 sec.	less than 10% of exposure time	5 or 10 cycles	Low temp.	

■ The noted specification tests include only those tests applicable to TSE-11-A. For further information, please contact us.

* Ambient temperature at exposure temperature and exposure time represent the temperature and time when moving from high temperature chamber to low temperature chamber.

SPECIFICATIONS

Model		TSE-11-A				
System		2-zone system by means of vertical movement of specimen				
Operation temperature		0 to +40°C (+32 to +104°F)				
Performance ^{*3}	Test area	High temp. exposure range	+ 60 to +200°C (+140 to +392°F)			
		Low temp. exposure range	− 65 to 0°C (− 85 to +32°F)			
		Temperature fluctuation ^{*1}	±0.5°C (±0.9°F)			
	High temp. chamber	Pre-heat upper limit	+ 200°C (+392°F)			
		Temp. heat-up rate ^{*2}	Within 30 min from ambient temp. to +200°C (+392°F)			
	Low temp. chamber	Pre-cool lower limit	− 80°C (− 112°F)			
		Temp. pull-down rate ^{*2}	Within 90 min from ambient temp. to −80°C (−112°F)			
	Temperature recovery performance	Recovery conditions	<ul style="list-style-type: none"> · 2 zones High temperature exposure: +150°C (+302°F), 30min. Low temperature exposure: − 65°C (− 85°F), 30 min. · Sensor position: Upstream of specimen · Specimens: plastic molded IC 2kg 			
		Recovery time	within 5 min.			
	Construction	Outer shell	Painted steel			
Interior		18-8 Cr-Ni stainless steel plate (SUS 304), titanium plate				
Insulation		Glass wool, foamed polyurethane				
Heater		Stripped wire heater				
Cooler		Plate fin cooler, cold accumulator				
Air circulator		Sirocco fan				
Refrigerator unit	Refrigeration system	Mechanical cascade refrigeration system				
	Compressor	Rotary 1.5 kW				
	Refrigerant	R508A R404A				
	Condenser	Air-cooled condenser				
Fittings		Specimen power supply control terminal, Integrating hour meter without reset, Time signal (2), Cable port (1pc, inside diameter 50mm, on right side of chamber), Casters with adjusters (4), Power cable				
Test area load capacity		8kg				
Specimen basket load capacity		2kg (equally distributed load)				
Inside dimensions (W×H×D)		320×148×230mm (12.6×5.8×9 inch)				
Outside dimensions (W×H×D) ^{*4}		680×1625×1050mm (26.8×64×41.3 inch)				
Weight		approximately 390kg				
Power supply (Power supply deviation: rating ±10%)		200V AC 3φ 3W 50/60Hz	220V AC 3φ 3W 60Hz	380V AC 3φ 4W 50Hz	400/415V AC 3φ 4W 50Hz	400V AC ^{*5} 3φ 4W 50Hz
Maximum current		26A	25A	17A	17A	17A
Exhaust heat quantity ^{*3}		17,585kJ/h				
Noise		60dB or less (At 1m from front of chamber, 1.2m from floor. (A-characteristic) depending on environment)				

*1 Performance indicators conform to JTM K01-1998 of Japan Testing Machinery Association.

*2 Temperature heat-up/pull-down rate imply performance of each temperature chamber.

*3 At ambient temperature + 23°C .

*4 Excluding protrusions.

*5 Compliance with CE Marking.



●Do not use specimens which are explosive or inflammable, or which contain such substances. To do so could be hazardous, as this may lead to fire or explosion.

●Do not place corrosive materials in the chamber. If corrosive substances or humidifying water is used, the life of the unit may be significantly shortened.

●Do not place life forms or substances that exceed allowable heat generation.



Be sure to read the user's manual before operation.

SAFETY DEVICES

- Leakage breaker (200, 220, 380, 400/ 415V AC)
- Circuit breaker (400V AC)
- Electric parts compartment door switch
- Temperature switch for overheat protection of high-temperature chamber
- Temperature switch for overheat protection of low-temperature chamber
- Overheat protector for high-temp. chamber (Built-in controller)
- Overheat/ overcool protectors for low temp. chamber. (Built-in controller)
- Test area overheat and overcool protectors (Built-in controller)
- Test area overheat / overcool protectors
- Refrigerator high pressure switch
- Thermal relay for compressor
- Compressor temperature switch
- Air circulator temperature switch
- Thermal relay for air circulator
- Motor inverter
- Motor reverse prevention relay
- High-temperature chamber door switch
- Low-temperature chamber door switch
- Test area hold
- Door lock mechanism
- Fuse
- Specimen power supply control terminal

ACCESSORIES

- Specimen basket (18-8 Cr-Ni stainless steel, 5 mesh metal basket)
W320×H35×D230mm
Withstand load: 2kg (equally distributed) 2
- Cartridge fuse (5 A) 1each
- Cable port rubber plug 2
- Wirefisher 1
- User's manual 1

OPTIONS

Paperless recorder

Records temperature of each section such as the temperature inside the chamber.

Number of inputs:

PL1S: 1 (5 more channels can be turned ON)

Data saving cycle: 1 sec

PL3S: 3 (3 more channels can be turned ON)

Data saving cycle: 1 sec

PL3L: 3 (3 more channels can be turned ON)

Data saving cycle: 5 sec

Temperature range: -100°C to $+220^{\circ}\text{C}$

External recording media:

CF memory card (128 MB)

Language support: ENG, JPN, CHN



Temperature recorder (digital)

-100 to $+220^{\circ}\text{C}$ /100mm

RK-61: 1pen

RK-63: 3 pens

RK-64: 6 dots



Temperature recorder for future installation

Preparation of a power cable, temperature sensor, and a grounding wire for additional installation in the future.

OPTIONS

Terminal for recorder

Serves to output temperature within test area, high temperature chamber, low temperature chamber.



Specimen power supply control terminal

Time signal

External alarm signal (option)

Thermocouple

Thermocouple measures the temperature of specimens.

- T JIS C 1602 with ball attached

Auxiliary cooling injector (LCO₂)

Used to reduce the temperature recovery time of low temperature exposure by injecting liquefied carbon dioxide at beginning of exposure.

Auxiliary cooling injector (LN₂)

Used to reduce the temperature recovery time of low temperature exposure by injecting liquefied nitrogen at beginning of exposure.

Total cycle counter

Indicates cycle counts.

- Display range: 1~99999999 (with resetting function)



Additional overhear protector

Additional preventive measures can be taken for excessive temperature rise in the chamber, in addition to the standard double equipped overhear protector.

External alarm terminal

If the safety device of the chamber activates, the external alarm terminal will notify the alarm to distant place.

Emergency stop switch

Stops the chamber immediately.



Cable port rubber plug

Prevents air leakage from the cable port.

Specimen basket

Equivalent to standard accessory.

- Material: stainless steel (5 mesh)



Fixture for securing body

Used to bolt the chamber to the floor.

Power cable

Used to connect to the primary power source.

- 5, 10m

Color specifications

Chamber can be painted to a desired color according to a color sample.

Communication functions

Computer interface

- GPIB
- RS-232C

*Select one other than standard RS-485.

ESPEC CORP. <http://www.espec.co.jp/english>

Head Office

3-5-6, Tenjinbashi, Kita-ku, Osaka 530-8550, Japan
Tel: 81-6-6358-4741 Fax: 81-6-6358-5500

ESPEC NORTH AMERICA, INC.

Tel: 1-616-896-6100 Fax: 1-616-896-6150

ESPEC EUROPE GmbH

Tel: 49-89-1893-9630 Fax: 49-89-1893-96379

ESPEC ENVIRONMENTAL EQUIPMENT (SHANGHAI) CO., LTD.

Head Office

Tel: 86-21-51036677 Fax: 86-21-63372237

BEIJING Branch

Tel: 86-10-64627025 Fax: 86-10-64627036

TIANJIN Branch

Tel: 86-22-26210366 Fax: 86-22-26282186

GUANGZHOU Branch

Tel: 86-20-83317826 Fax: 86-20-83317825

SHENZHEN Branch

Tel: 86-755-83674422 Fax: 86-755-83674228

SUZHOU Branch

Tel: 86-512-68028890 Fax: 86-512-68028860

ESPEC TEST TECHNOLOGY (SHANGHAI) CO., LTD.

Tel: 86-21-68798008 Fax: 86-21-68798088

ESPEC (MALAYSIA) SDN. BHD.

Tel: 60-3-8945-1377 Fax: 60-3-8945-1287



ISO 9001/JIS Q 9001
Quality Management System Assessed
and Registered

ESPEC CORP. has been assessed by and registered in the Quality Management System based on the International Standard ISO 9001:2008 (JIS Q 9001:2008) through the Japanese Standards Association (JSA).

ISO 14001 (JIS Q 14001)
Environmental Management System Assessed and Registered
ESPEC CORP.

- Specifications are subject to change without notice due to design improvements.
- Corporate names and trade names mentioned in this catalog are trademarks or registered trademarks.