





# Temperature Probes

Technical datasheet

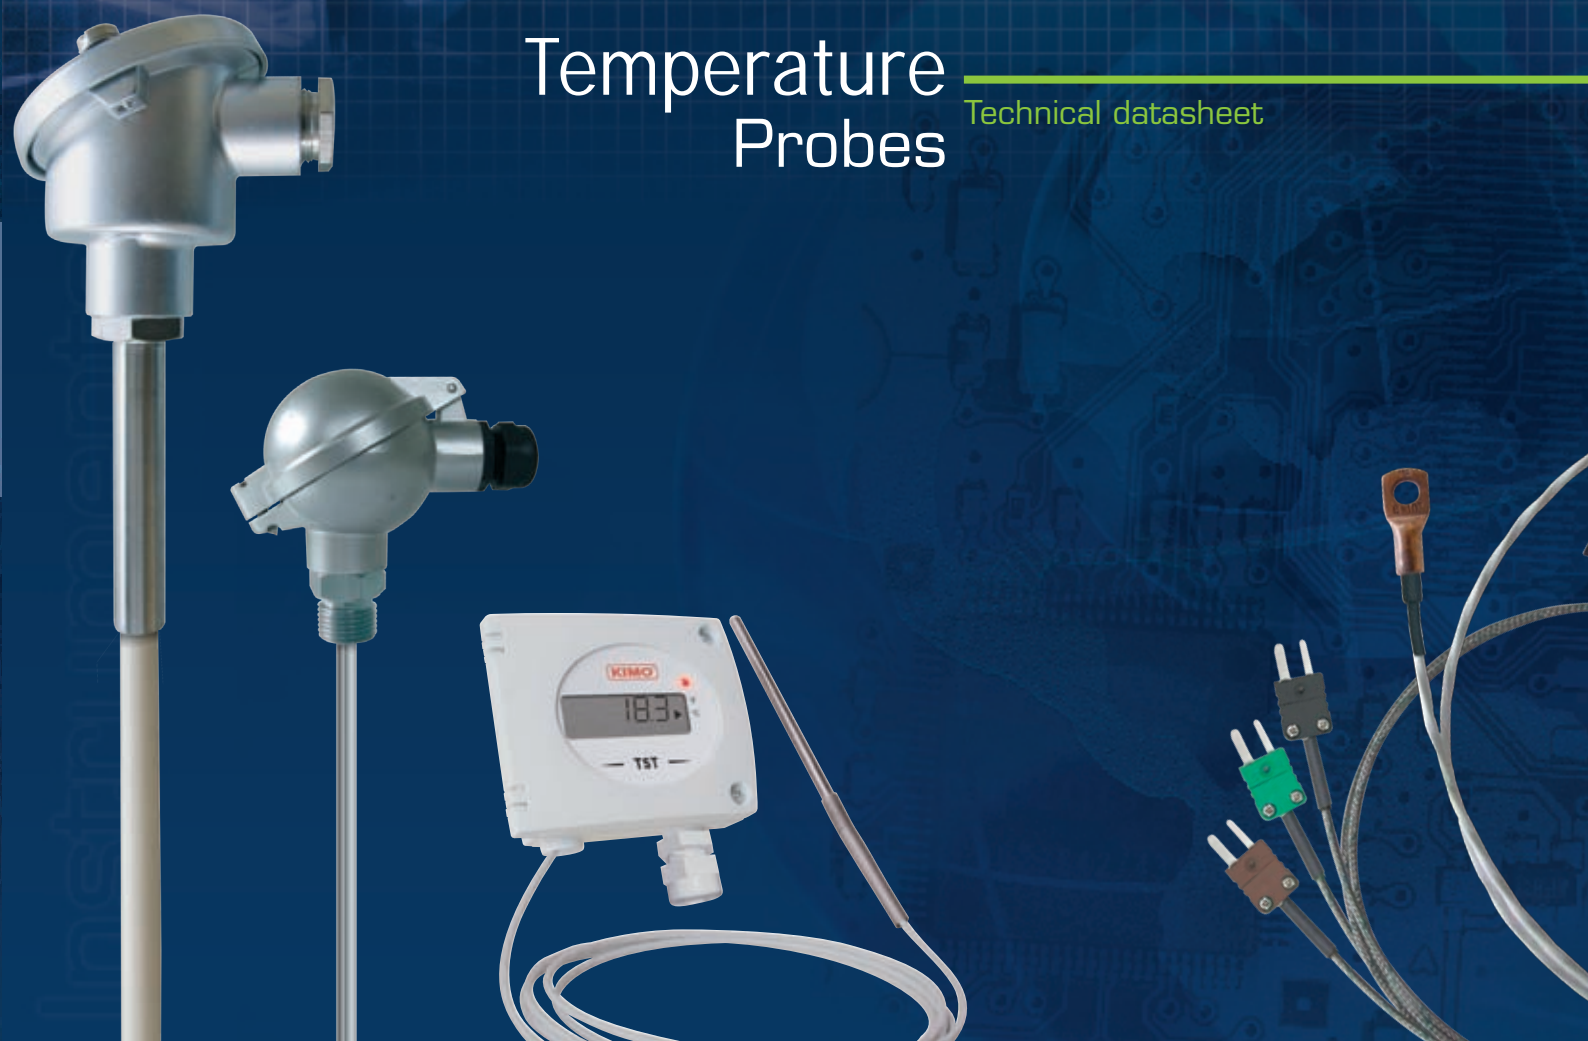

Temperature

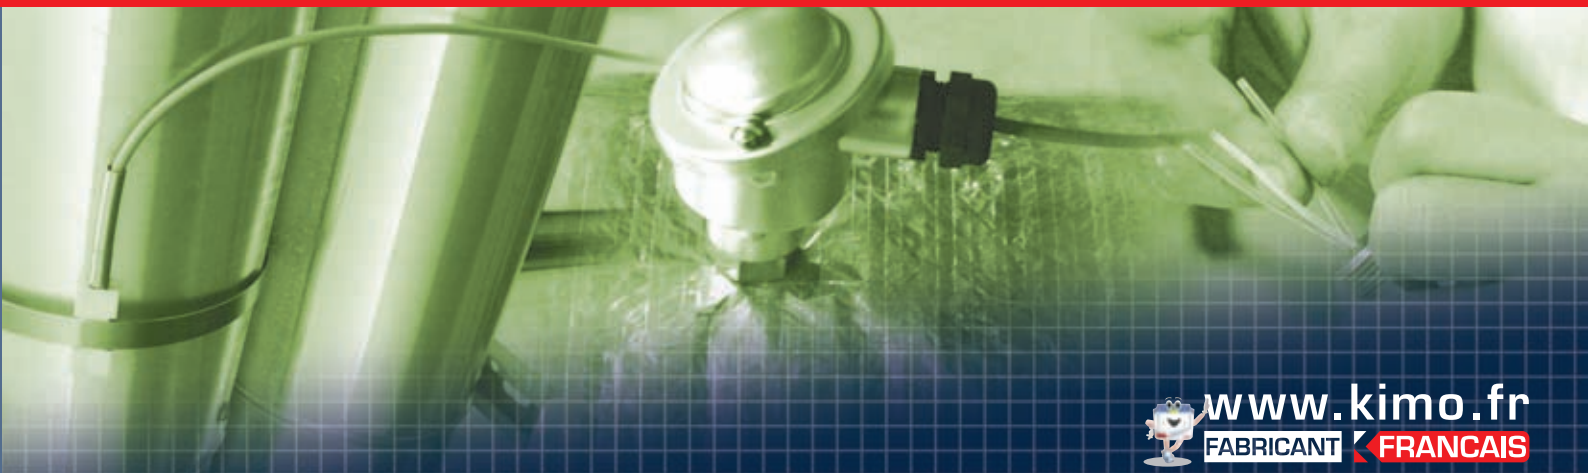

# SUMMARY

Useful informations - Connection heads .....p 1

## Part 1 : Wire resistive element

<b>F 50</b> - output DIN connector .....	p 5
<b>F 50 I</b> - with collapsible contact tip .....	p 7
<b>SF 50</b> - temperature probe with cable .....	p 9
<b>SF 50 I</b> - with collapsible contact tip .....	p 11
<b>SFBT 50</b> - for very low temperature .....	p 13
<b>SFR 50</b> - with fixing fitting .....	p 15
<b>SFC 50</b> - angled resistive element .....	p 17
<b>SFP 50</b> - penetration probe .....	p 21
<b>SFPP 50</b> - with needle ended tip .....	p 23
<b>SFPPT 50</b> - T handle temperature probe .....	p 27
<b>SFO 50</b> - for contact measurement by eyelet .....	p 29
<b>SFSC 50</b> - with self adhesive patch .....	p 31
<b>SFCS 50</b> - surface contact wire .....	p 33
<b>SFCT 50</b> - for pipe .....	p 35
<b>SFBA 50</b> - with bayonet .....	p 37
<b>SFGT 50</b> - for aggressive application .....	p 39

## Part 2 : Head resistive element

<b>SG 50</b> - with ABS head housing .....	p 43
<b>SG 100</b> - with ABS head .....	p 45
<b>TM 50</b> - temperature transmitter .....	p 49
<b>TG 100</b> - temperature transmitter .....	p 51
<b>TM 100</b> - temperature transmitter .....	p 55
<b>TST</b> - thermostats .....	p 59
<b>TB 50</b> - standard connection head .....	p 63
<b>TBBT 50</b> - for very low temperature application .....	p 65
<b>TBHT 50</b> - for very high temperature use .....	p 67
<b>TM 50</b> - miniature connection head .....	p 69
<b>TE 50</b> - waterproof .....	p 71
<b>TP 50</b> - noryl .....	p 73
<b>THIR 50</b> - with DIN 43650 head .....	p 75
<b>TM 12 50</b> - plug-in head .....	p 77
<b>TBEI 50</b> - with interchangeable mountings .....	p 79
<b>TBRD 50</b> - with offset fitting .....	p 83
<b>TBAJ 50</b> - with ambient tip .....	p 85
<b>TBC 50</b> - bent RTD sensor .....	p 87
<b>TBCT 50/TMCT 50</b> - for contact duct .....	p 91
<b>TBB 50</b> - standard with mounting flange .....	p 95
<b>TBRC 50</b> - standard with clamp fitting .....	p 97
<b>TPGT 50</b> - for aggressive application .....	p 99
<b>TPTT 50</b> - for aggressive application .....	p 101
<b>Wine application</b> - head or cable probe .....	p 103
<b>Fermenting room</b> - grip handle PT 100 probe .....	p 107
<b>Compost</b> - PT 100 probe .....	p 109

## Part 3 : Wire thermocouple

<b>F</b> - with visible welding .....	p 113
<b>F KI</b> - mineral insulated thermocouple .....	p 115
<b>SF K/SF KI</b> - thermocouple with cable .....	p 117
<b>SFR K</b> - with fitting of fixation .....	p 119
<b>SFC K</b> - with angled or lined inconel thermocouple .....	p 121
<b>SFP K</b> - penetration probe .....	p 125
<b>SFPP K</b> - with handle to prick .....	p 127
<b>SFPPT K</b> - with T handle .....	p 131
<b>SFAI K</b> - with magnetic mounting .....	p 133
<b>SFO K</b> - for measurement of contact by eyelet .....	p 135
<b>SFCT K</b> - with cable for pipe .....	p 137
<b>SFCS K</b> - for surface contact .....	p 139
<b>SFBA K</b> - with bayonet .....	p 141
<b>SFCSM K</b> - for moving parts .....	p 143

## Part 4 : Head thermocouple

<b>TB K</b> - with aluminium connection head .....	p 147
<b>TBEI K</b> - with interchangeable probe system .....	p 149
<b>TBAJ K</b> - with ambient tip .....	p 151
<b>TBRD K</b> - with offset fitting .....	p 153
<b>TBC K</b> - with aluminium connection head .....	p 155
<b>TBCT K/TMCT K</b> - for contact duct .....	p 159
<b>TBAL K</b> - for high temperature .....	p 163
<b>TBAL S</b> - for high temperature .....	p 164
<b>TBAR K</b> - with heat-resisting steel protector .....	p 165
<b>TBB K</b> - with mounting flange .....	p 167
<b>TBRC K</b> - with clamp fitting .....	p 169
<b>Fermenting room</b> - grip handle probe .....	p 171
<b>Compost</b> - thermocouple probe .....	p 173

## Part 5 : Accessories



<b>PT 100/PT 1000/CTN</b>	<b>Thermocouple</b>
<b>Watertight connections</b> p 177	<b>Watertight connections</b> p 185
<b>Thermowells</b> .....p 178	<b>Thermowells</b> .....p 186
<b>Connectors</b> .....p 179	<b>Fixations</b> .....p 187
<b>Bases</b> .....p 179	<b>Connectors</b> .....p 187
<b>Fixations</b> .....p 180	<b>Bases &amp; panels</b> .....p 190
<b>Cords &amp; cables</b> .....p 181	<b>Cords &amp; cables</b> .....p 192
<b>Converters</b> .....p 183	<b>Converters</b> .....p 193
<b>Miscellaneous</b> .....p 184	<b>Miscellaneous</b> .....p 194







**Part 1 : Wire resistive element**

	<b>F 50</b> output DIN connector.....p 5
	<b>F 50 I</b> with collapsible contact tip.....p 7
	<b>SF 50</b> temperature probe with cable.....p 9
	<b>SF 50 I</b> with collapsible contact tip.....p 11
	<b>SFBT 50</b> for very low temperature.....p 13
	<b>SFR 50</b> with fixing fitting.....p 15
	<b>SFC 50</b> angled resistive element.....p 17
	<b>SFP 50</b> penetration probe.....p 21
	<b>SFPP 50</b> with needle ended tip.....p 23
	<b>SFPPT 50</b> T handle temperature probe.....p 27
	<b>SFO 50</b> for contact measurement by eyelet.....p 29
	<b>SFSC 50</b> with self adhesive patch.....p 31
	<b>SFCS 50</b> surface contact wire.....p 33
	<b>SFCT 50</b> for pipe.....p 35
	<b>SFBA 50</b> with bayonet.....p 37
	<b>SFGT 50</b> for aggressive application.....p 39



+400°C




*Temperature probe with resistive element and output on DIN connector*

**F 50 – FD 50**

**Part numbers**


**• F 50**

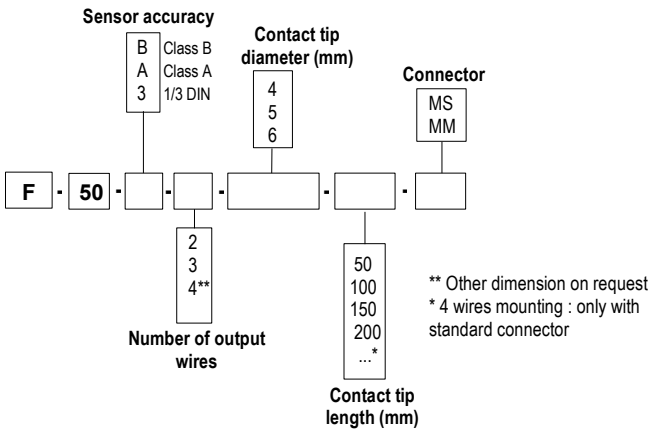

Example : F50-B-2-4-50-MM

Model : Temperature probe Class B, 2 wires, contact tip diameter 4 mm and 50 mm length with connector type MM. **Measuring range** from -50 to +400 °C.

**• FD 50**

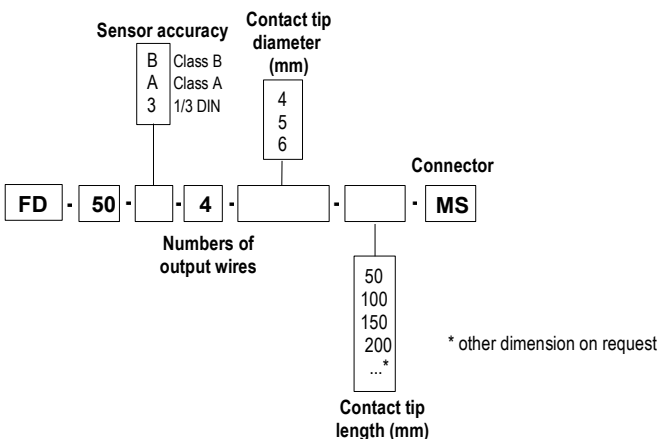

Example : FD50-B-4-4-50-MS

Model : Temperature probe Class B, 4 wires, contact tip diameter 4 mm and 50 mm length with connector type MS. **Measuring range** from -50 to +400 °C.

**Probe features**

- Temperature probe mounted on male connector
- Measuring range from **-50°C to +400°C**
- Rigid contact tip

**Technical features**

Operating temperature.....from -50°C to+400°C

Accuracy.....See "Tolerances" table

Sensor type.....**PT100 or PT1000** : Class B, Class A, 1/3 DIN as per DIN IEC751

Storage temperature.....from -20°C to +80°C

Contact tip.....Stainless steel 316 L without welded, rigid

Mounting.....2, 3 or 4 wires for F 50  
4 wires for FD 50



**4 wires mounting only with standard connector**

Connector.....miniature 2 and 3 flat pins in copper  
standard 2, 3 and 4 flat pins in copper  
temperature max : 200 °C

**Tolerances\* of Pt100 and Pt1000 probes**

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms.


Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.




## ■ Dimensions

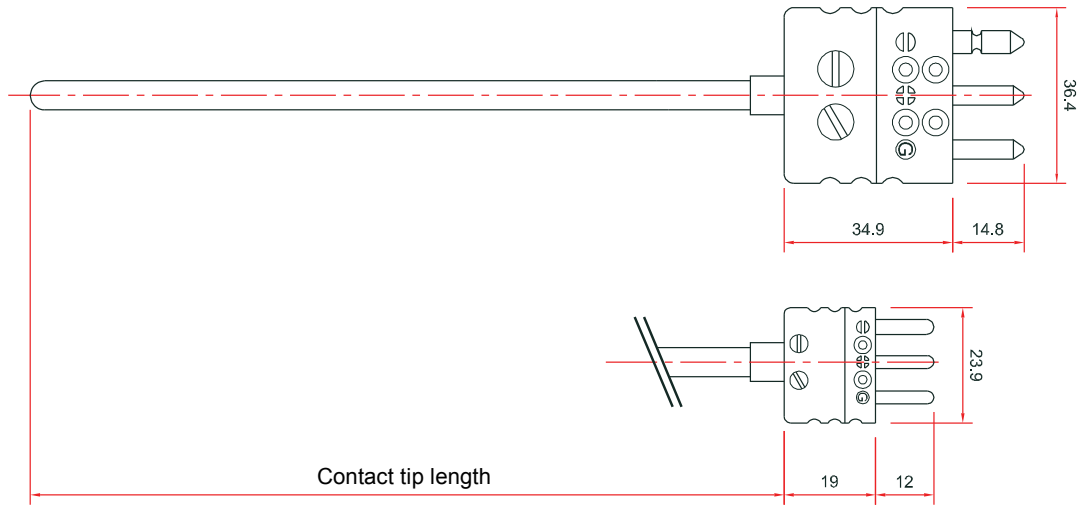

## ■ Accessories (See data sheet)

- Transmitter output 4-20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- 1/4, 1/2 gas screw nut
- Sliding connection
- Teflon or stainless steel ferrule for compression fitting



- Sleeve to weld for food industry (with 1/2" G female)
- Stainless steel junction fitting
- 1/2 gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



+550°C




*Temperature probe  
at resistive element with collapsible  
contact tip and output on  
Din connector*

## F 50 I – FD 50 I

### Part numbers

#### • F 50 I

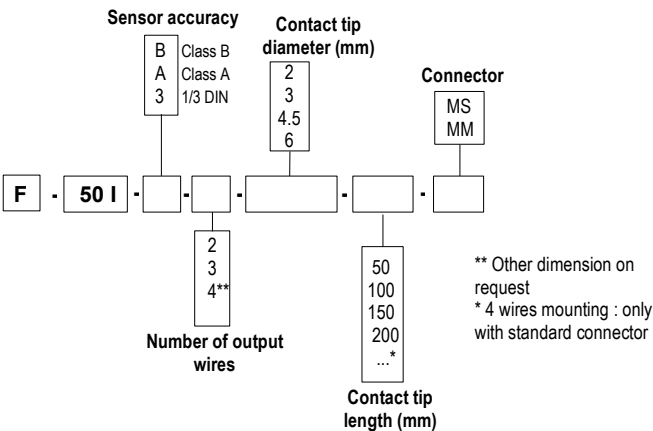


Example : F50I-B-2-3-500-MM

Model : Temperature sensor class B, 2 wires, contact tip of 3 mm of diameter and 500 mm of length with connector type MM.

Measuring range : from -50 to + 550 °C

#### • FD 50 I

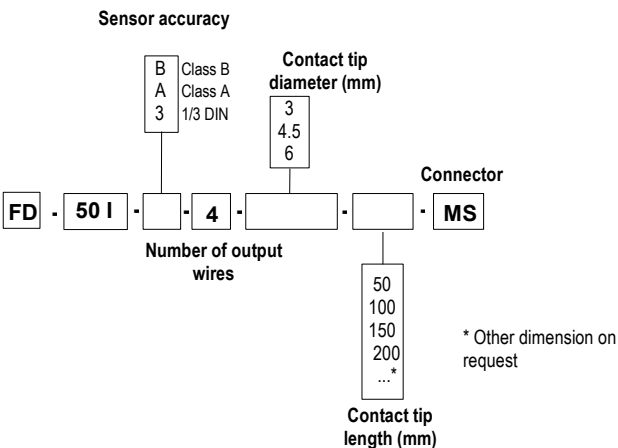

Example : FD50I-B-4-3-500-MS

Model : Temperature sensor class B, 4 wires, contact tip of 3mm of diameter and 500 mm of length with connector type MS.

Measuring range : from -50 to + 550 °C

### Probe features

- Temperature sensor mounted on male connector
- Measuring range from **-50°C to +550°C**
- Collapsible contact tip

### Technical features

Operating temperature.....from -50°C to +550°C

Accuracy.....See "Tolerances" table

Sensor type.....**PT100 or PT1000** : Class B, Class A, 1/3 DIN as per DIN IEC751

Storage temperature.....from -20°C to +80°C

Contact tip.....lined collapsible (semi-rigid)

Stainless steel 316 L without welding



**Non-collapsible zone on 25 mm at the end of the contact tip**

Mounting.....2, 3 or 4 wires for F 50 I

4 wires for FD 50 I




**4 wires mounting only with a standard connector**

Connector.....miniature 2 and 3 copper flat pins

standard 2, 3 and 4 copper round pins

Temperature max. : 200 °C

## Dimensions

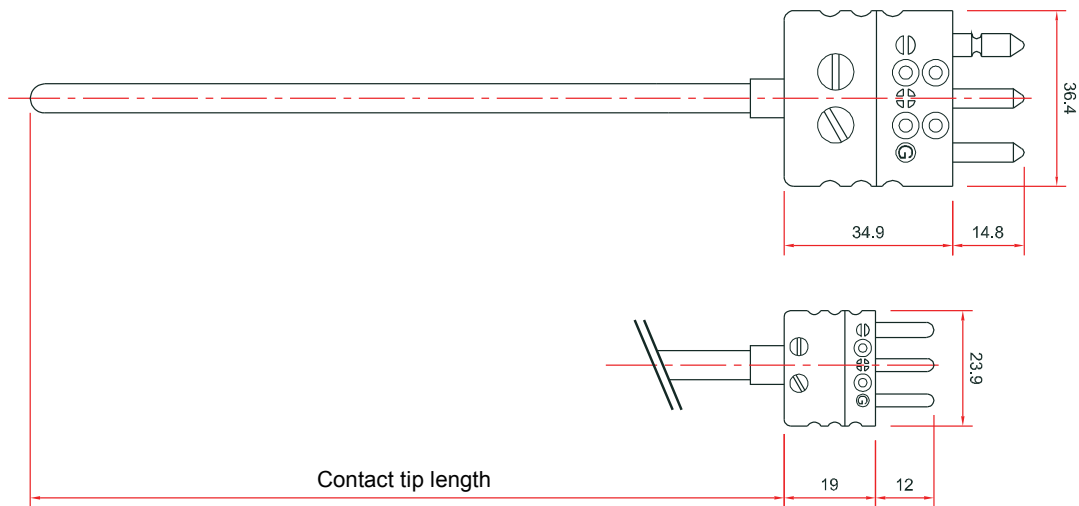

## Tolerances\* of Pt100 and Pt1000 probes

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms.


Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.


## Accessories (See data sheet)

- Transmitter output 4-20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- 1/4, 1/2 gas screw nut
- Sliding connection
- Teflon or stainless steel ferrule for compression fitting



- Sleeve to weld for food industry (with 1/2" G female)
- Stainless steel junction fitting
- 1/2 gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



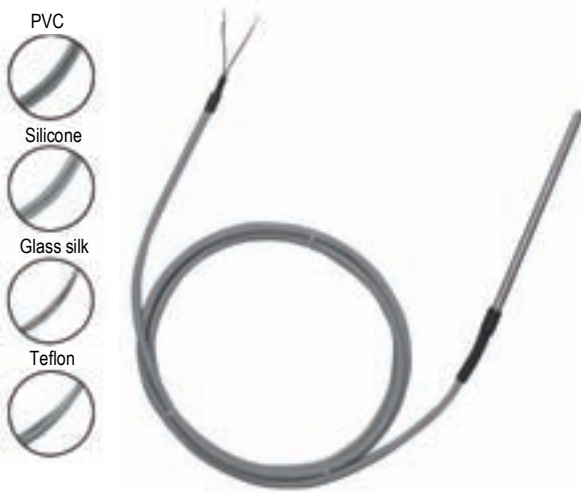

*Temperature probe with cable*

**SF 50 / SFD 50**

**Probe features**

- Stainless steel temperature probes with conductive cable.
- Measuring range (according to cable)  
from **-50°C to +400°C (PT100 and PT1000)**  
from **-20°C to +120°C (CTN)**.
- 2 wires for NTC and PT1000 outputs,
- 3 or 4 wires for PT100 output.
- For other resistance types PT25, PT50, PT500, PT200 or NI, please contact us.


**Transmitter features**

- Working temperature**.....from -50°C to +400°C (PT100 and PT1000)  
(According to cable) from -20°C to +120°C (NTC)
- Accuracy \***.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : class B, class A  
and 1/10 DIN as per DIN IEC751  
NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ Nominal  
Beta value B25/85 = 3.695K ±1%
- Storage temperature**.....from -20°C to +80°C
- Working temperature of the cable**  
PVC : from -40°C to +120°C  
Silicone : from -50°C to +180°C  
Teflon (PFA) : from -50°C to +260°C  
Glass silk with stainless steel sheet : from -50°C to +400°C
- Probe**.....316 L stainless steel, watertight crimping with heat shrink tubing. (Except glass silk cable with standard mounting on stainless steel duct)

\*all accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

**Part numbers**

**• SF 50 – Single pair probe -**

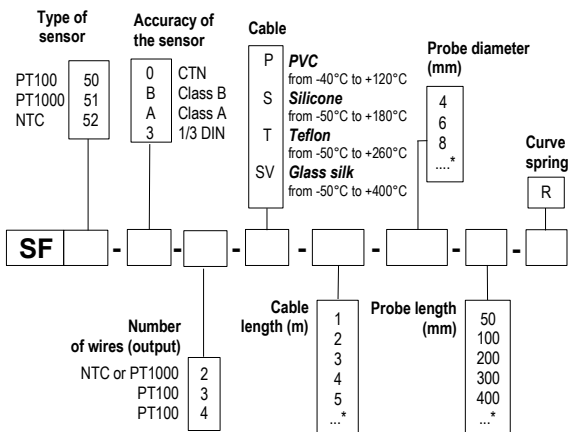


\* Other length available on request

**Example : SF51-B-2-P-1-4-100**

Model : Temperature probe PT1000 Class B, 2 wires, PVC cable of 1 m length. Stainless steel protective sheath 4 mm Ø, length 100 mm without curve spring. Measuring range from -40 to +120°C.

**• SFD 50 – Multipair Probe -**

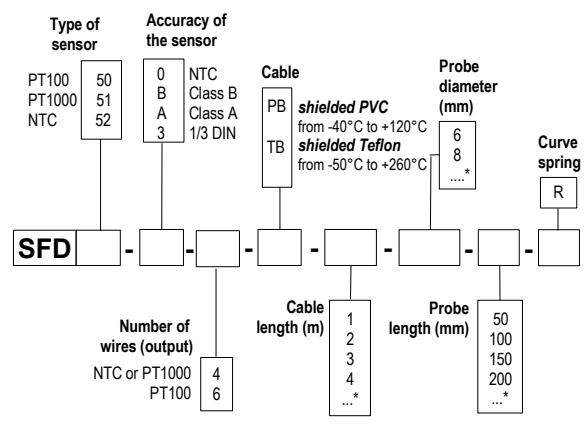


\* Other length available on request

**Example : SFD51-B-4-PB-1-6-100**

Model : Temperature probe PT1000 Class B, 4 wires, shielded PVC cable of 1 m length. Stainless steel protective sheath 4 mm Ø, length 100 mm without curve spring. Measuring range from -40 to +120°C.

PT 100

## ■ Probes dimensions

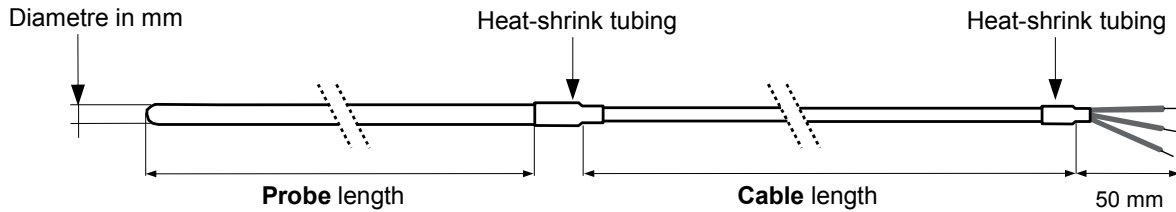

## ■ Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## ■ Tolerances of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

## ■ Accessories (See Datasheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






**Cable temperature probe  
at resistive element and collapsible  
contact tip**

**SF 50 I – SFD 50 I**


**Part numbers**

**• SF 50 I**

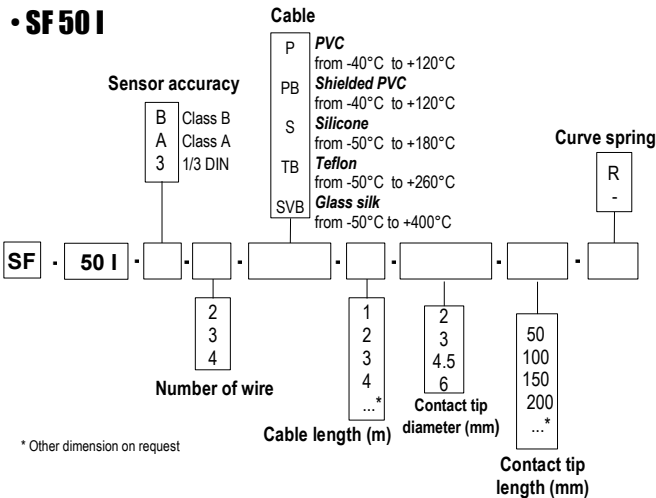

\* Other dimension on request

**• SFD 50 I**

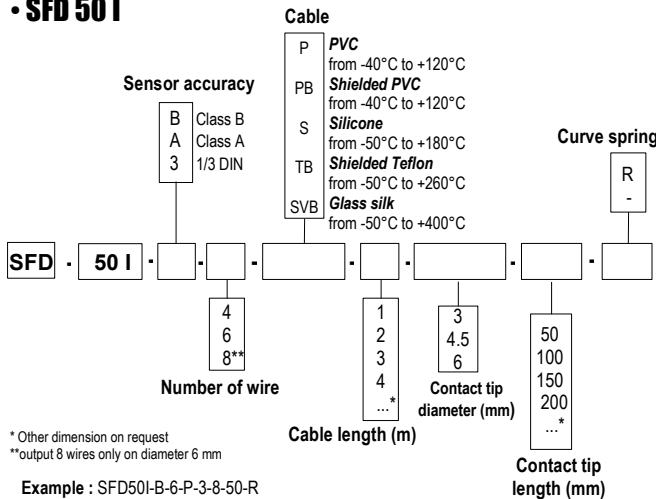

\* Other dimension on request  
 \*\*output 8 wires only on diameter 6 mm


**Probe features**

- Temperature probe mounted on conductor cable with contact tip
- Measuring range from **-50°C to +550°C**
- Output 2, 3 or 4 wires for SF 50 I  
4, 6 or 8 wires for SFD 50 I

**Technical features**

**Operating temperature**.....from -50°C to +550°C  
**Accuracy**.....See "Tolerances" table  
**Sensor type**.....**PT100** : Class B, Class A and 1/3 DIN  
As per DIN IEC751  
**Storage temperature**.....from -20°C to +80°C


**Contact tip**.....lined collapsible (semi-rigid)  
Stainless steel 316 L without welding



**Non-collapsible zone on 25 mm at the end of the contact tip**

**Junction**.....5 mm diameter and 50 mm length in standard temperature max. : 150 °C  
Waterproof junction on request  
**Cable**.....**PVC and shielded PVC** : from -40 to +150 °C  
**Silicone** : from -50 to +180 °C  
**Teflon** : from -50 to +250 °C  
**Glass silk** : from -50 to +400 °C

## Dimensions

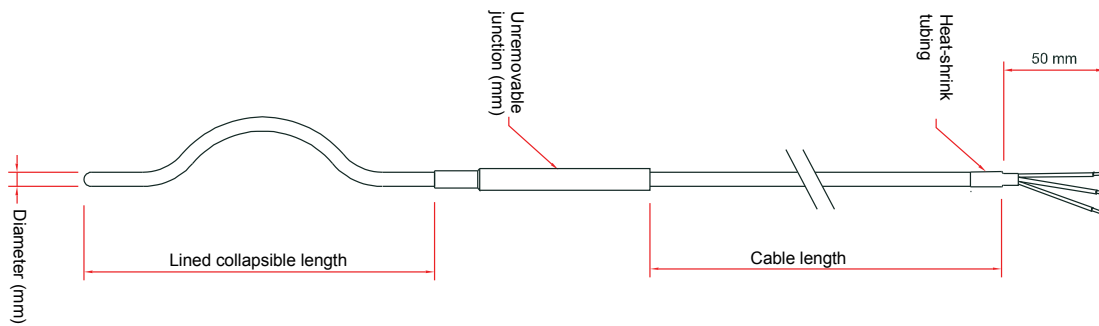

## Tolerance\* of PT100 probes.


Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell





**RTD sensor with cable  
for very low temperature**

**SFBT 50 / SFBTD 50**

**Probe features**

- Stainless steel temperature probes with conductive cable.
- Measuring range (according to cable) :  
**from -80°C to +50°C (PT100 and PT1000)**
- 2 wires (SFBT) or 4 wires (SFBTD) for PT1000
- 3 - 4 wires (SFBT) or 6 wires (SFBTD) for PT100.


**Technical features**

- Working temperature.....from -80°C to +50°C (PT100 and PT1000)
- Accuracy \*.....PT100 or PT1000 : see "Tolerances" table
- Type of sensor.....PT100 : Class B, Class A.  
PT1000 : Class B only.
- Storage temperature.....from -20°C to +80°C
- Working temperature  
of the cable.....Teflon (PFA) : from -50°C to +260°C
- Mounting.....4 mm Ø probe for 2 or 3 wires only  
6 wires mounting from 6 mm Ø.
- Sheath.....316 L stainless steel, watertight crimping.  
Curve spring as option.

\*All the accuracies indicated in this technical datasheet were stated in laboratories conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

**Part numbers**


**• SFBT 50 - Single pair -**

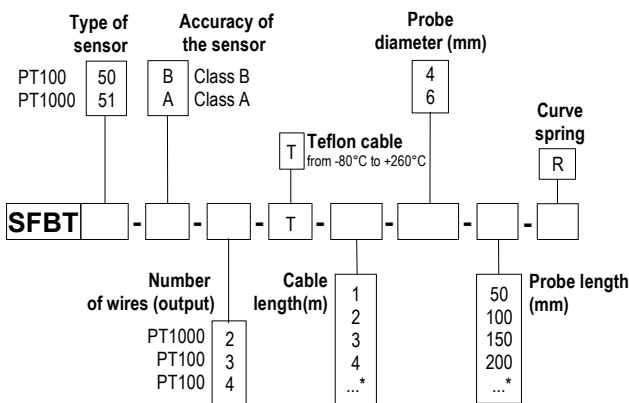

\* Other lengths available on request

**Example : SFBT51-B-2-T-1-4-100-12**  
Model : Temperature probe PT1000 Class B, 2 wires, Teflon cable of 1 m length. Stainless steel protective sheath 4 mm Ø, length 100 mm, without curve spring. Measuring range from -80 to +50°C.

**• SFBTD 50 - Multipair -**

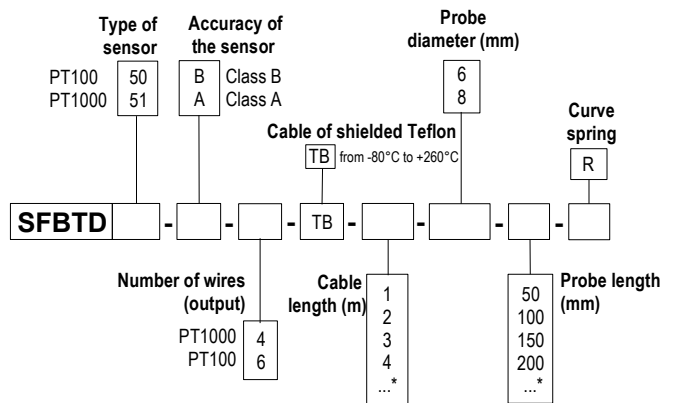


\* Other lengths available on request

**Example : SFBTD51-B-4-TB-1-6-100**  
Model : Temperature probe PT1000 Classe B, 4 wires, cable of 1m length in shielded Teflon. Stainless steel protective sheath 6 mm Ø, length 100 mm, without curve spring. Measuring range from -80 to +50°C.



## Dimensions

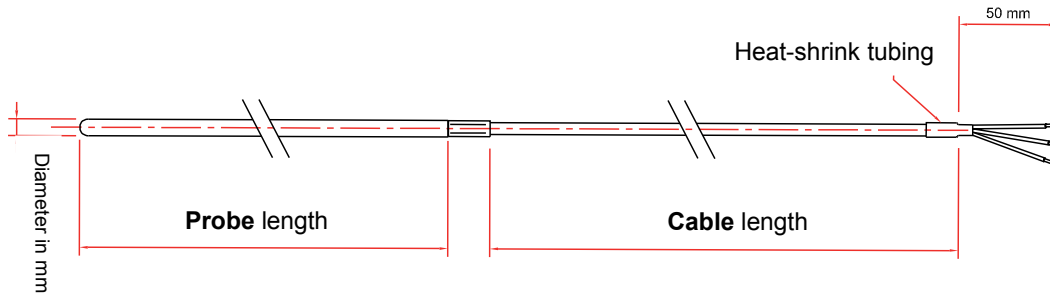

## Tolerance of PT100 and PT1000 probes.


Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances			
	Class B		Class A	
	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14
-50	0,55	0,22	0,25	0,1
0	0,3	0,12	0,15	0,06
100	0,8	0,3	0,35	0,13
200	1,3	0,48	0,55	0,2
300	1,8	0,64	0,75	0,27
400	2,3	0,79	0,95	0,33

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω


## Accessories (See Datasheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel sliding connection
- Teflon or stainless steel ferrule for compression fitting



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



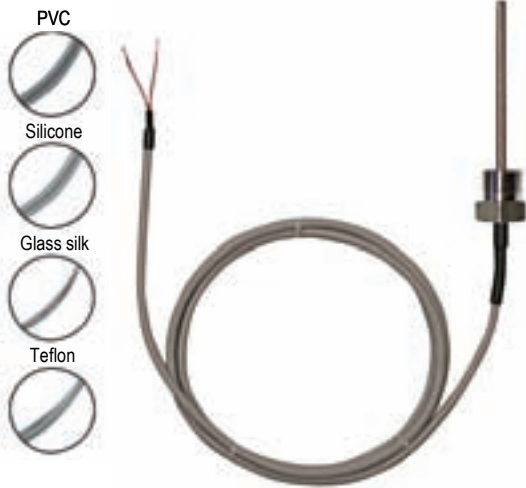


**Probe features**

- Temperature probe mounted on conductive cable with stainless steel contact tip and fitting.
- Measuring range (according to cable) :  
**from -50°C to +400°C (PT100 and PT1000).**  
**from -20°C to +120°C (NTC).**
- 2 wires (SFR) or 4 wires (SFRD) for NTC and PT1000 outputs
- 3 - 4 wires (SFR) or 6 wires (SFRD) for PT100 output.
- For other resistance types PT25, PT50, PT500, PT200 or NI, please contact us.


**Part numbers**

**SFR 50 – Simple pair probe -**

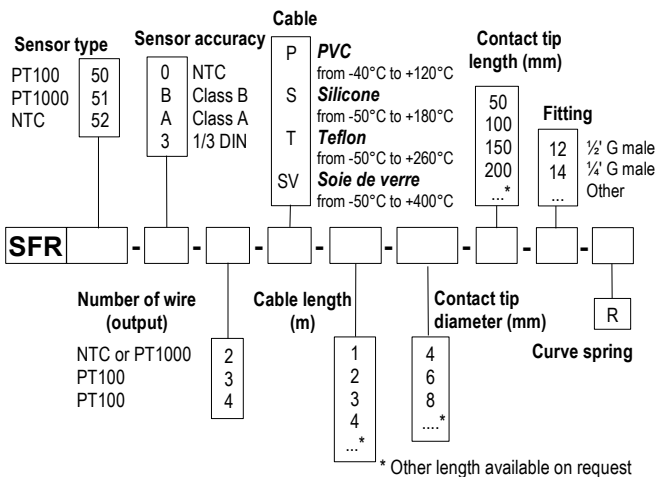

**Example : SFR51-B-2-P-1-4-100-12**  
 Model : PT1000 temperature probe, Class B, 2 wires, PVC cable of 1m length. Stainless steel contact tip of 4 mm Ø , length 100 mm, fitting process with ½" G thread, without curve spring. **Measuring range from -40 to +120°C.**

**SFRD 50 – Multipair probe**

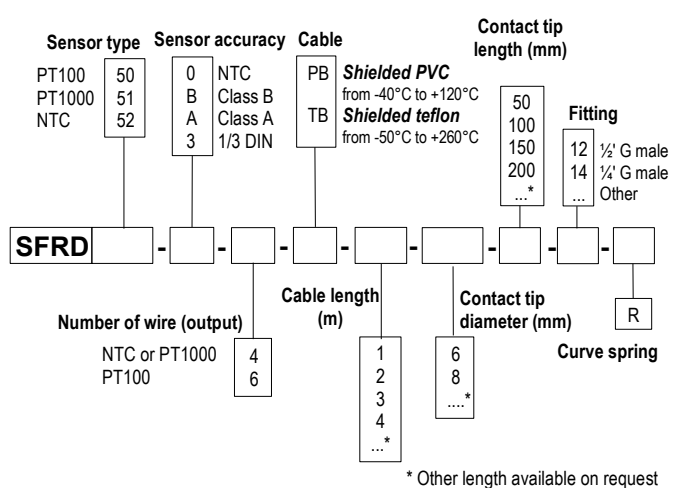

**Example : SFRD51-B-4-PB-1-6-100-12**  
 Model : PT1000 temperature probe, Class B, 4 wires, shielded PVC cable of 1m length. Stainless steel contact tip of 6 mm Ø , length 100 mm, fitting process with ½" G thread, without curve spring. **Measuring range from -40 to +120°C.**

**Temperature probe with cable at resistive element with fixing fitting**



**SFR 50 / SFRD 50**


**Technical features**

- Operating temperature**.....from -50°C to +400°C (PT100 and PT1000)  
 (According to cable) from -20°C to +120°C (NTC)
  - Accuracy \***.....**PT100 or PT1000** : see "Tolerances" table  
 NTC : see "Tolerances" table
  - Sensor type**.....**PT100 or PT1000** : class B, class A and 1/10 DIN as per IEC751  
 NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ Nominal  
 Beta value B25/85 = 3,695K ±1%
  - Storage temperature**.....from -20°C to +80°C
  - Operating temperature of cable**.....**PVC** : from -40°C to +120°C  
**Silicone** : from -50°C to +180°C  
**Teflon (PFA)** : from -50°C to +260°C (Shielded is optional)  
**Glass silk with stainless steel sheet** : from -50°C to +400°C
  - Compression fitting**.....inox 316 L
  - Thread**.....¼" or ½" Gas screw nut
  - Contact tip**.....316 L stain less steel, watertight crimping with heat shrink tubing. (Except glass silk cable with Standard mounting on stainless steel duct)  
 Optional : curve spring
- No 4-wire mounting for 4mm Ø contact tip

\*all accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

PT 100

## Probe dimensions

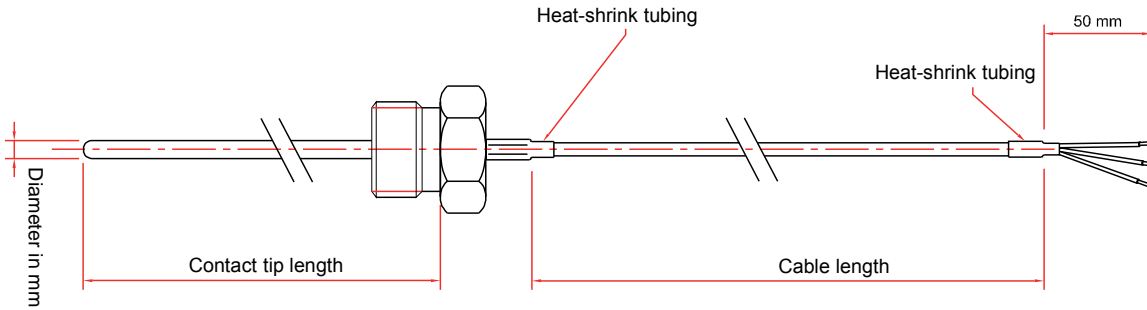

## Tolerances\* of PT100 and PT1000 probes.

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms.

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for PT1000 Class B  $\pm 0,3^{\circ}\text{C} \rightarrow \pm 1,2 \Omega$


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.

## Accessories (See data sheet)

- Transmitter 4/20 mA or 0/10V output
- Wall mounting support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Compression fittings
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry (avec manchon ½" G femelle à souder)
- Stainless steel junction fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



**Cable temperature probe at angled resistive element with or without fitting**

**Type SFC 50**

**SFC 50 - SFCD 50 – SFCR 50 – SFCRD 50**



■ **General features**

- Temperature probe mounted on conductive cables with angled stainless steel contact tip, with or without stainless steel fitting
- Measuring ranges (according to cable) :  
**from -50°C to +400°C (PT100 and PT1000).**  
**from -20°C to +120°C (NTC).**
- **2 wires output (SFC, SFCR) or 4 wires output (SFCD, SFCRD) for NTC and PT1000.**
- **3-4 wires output (SFC, SFCR) or 6 wires output (SFCD, SFCRD) for PT100.**
- For other resistance types (PT25, PT50, PT500, PT200 or NI), please contact us.

■ **Technical features**

<b>Operating temperature.....</b>	from -50°C to +400°C (PT100 and PT1000)
<b>(according to cable)</b>	from -20°C to +120°C (NTC)
<b>Accuracy *.....</b>	<b>PT100 or PT1000</b> : see "Tolerances" table
	<b>NTC</b> : see "Tolerances" table
<b>Sensor type.....</b>	<b>PT100 or PT1000</b> : class B, class A, 1/3 DIN, as per DIN IEC751
	<b>NTC</b> : resistance at 25°C, R <sub>25</sub> = 10KΩ Nominal
	Beta value B25/85 = 3,695K ±1%
<b>Storage temperature.....</b>	-20°C to +80°C
<b>Operating temperature of cable.....</b>	<b>PVC</b> : from -40°C to +120°C (Shielded on request)
	<b>Silicone</b> : from -50°C to +180°C
	<b>Teflon (PFA)</b> : from -50°C to +260°C (Shielded on request)
	<b>Silk glass with stainless steel braid</b> : from -50°C to +400°C
<b>Probe and connection.....</b>	316 L stainless steel
	Bent at 90° (other on request)
	Watertight crimping with heat-shrink tubing (except for silk glass with standard mounting on stainless steel duct)
	Curve spring available as option
<b>Connection thread.....</b>	½' or ¼' gas
<b>Connection mounting.....</b>	<b>On L2 length (see drawing)</b> : 12 or 14 corresponding to ½' G and ¼' G connections
	<b>On L1 length (see drawing)</b> : 12L1 or 14L1 corresponding to ½' G and ¼' G connections


⚠ For Ø 4mm, the 4 wires mounting is not available

# SFC 50 & SFCD 50

Angled cable probe  
in simple pair or multipair mounting




## Dimensions

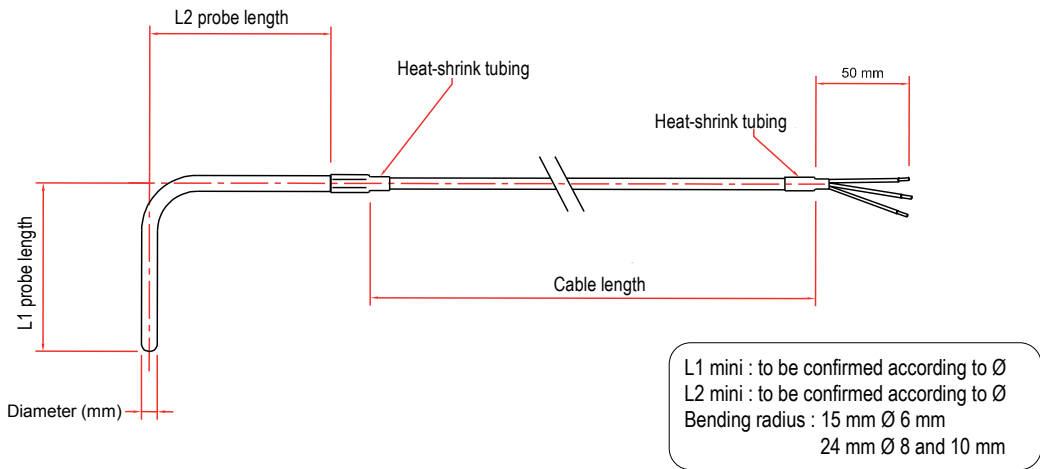


## Part numbers

### • SFC 50 – Single pair probe

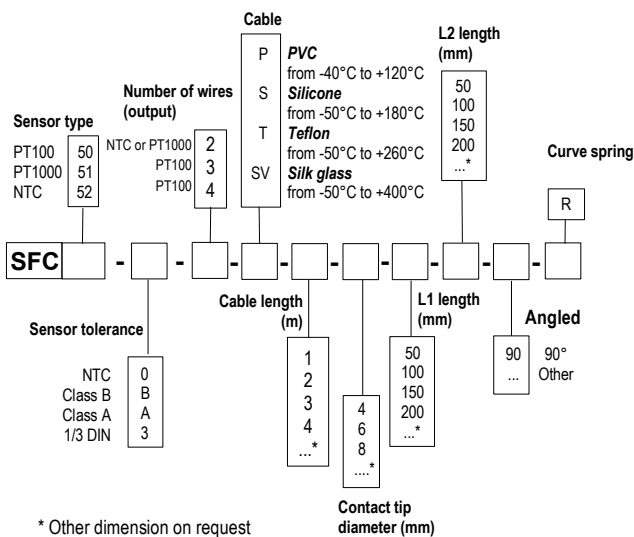

**Example : SFC-51-B-2-P-1-4-100-100-90-R**  
Model : PT1000 temperature probe class B, 2 wires, PVC cable of 1m length. Stainless steel contact tip Ø 4 mm angled at 90° and L1 and L2 lengths of 100 mm, with curve spring. **Measuring range from -40 to +120°C.**

### • SFCD 50 – Multipair probe -

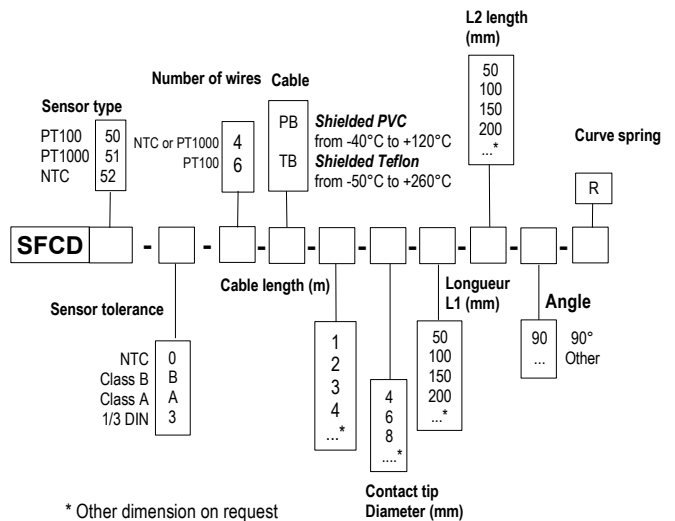

**Example : SFCD-51-B-4-PB-1-6-100-100-90-R**  
Model : PT1000 temperature probe class B, 4 wires, shielded PVC cable of 1m length. Stainless steel contact tip Ø 6 mm angled at 90° and L1 and L2 lengths of 100 mm, with curve spring. **Measuring range from -40 to +120°C.**

# SFCR 50 & SFCRD 50


Angled cable probe with fitting  
in simple pair or multipair mounting




PT 100

## Dimensions

• With fitting on L1

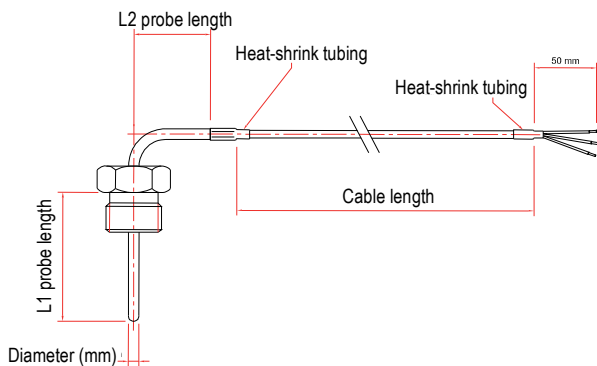


• With fitting on L2

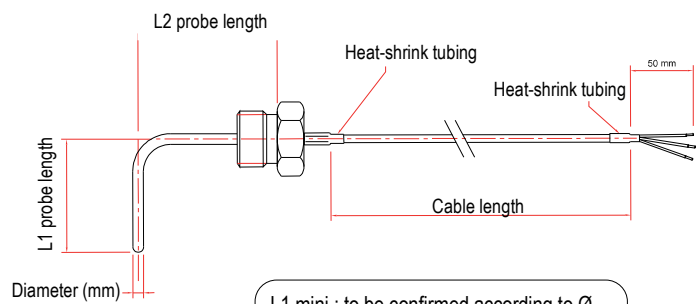

L1 mini : to be confirmed according to Ø  
L2 mini : to be confirmed according to Ø  
Bending radius : 15 mm Ø 6 mm  
24 mm Ø 8 et 10 mm

## Part numbers


• SFCR 50 - Single pair probe -

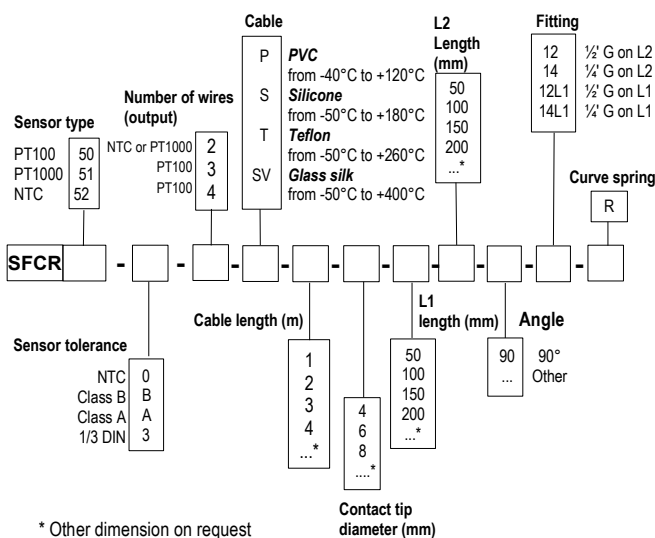

Example : SFCR51-B-2-P-1-4-100-100-90-12-R

Model : PT1000 temperature probe class B, 2 wires, PVC cable of 1m length. Stainless steel contact tip Ø 4 mm angled at 90° and L1 and L2 lengths of 100 mm, with thread fitting ½ G fixed on L2, and with curve spring. **Measuring range from -40 to +120°C.**

• SFCRD 50 - Multipair probe -

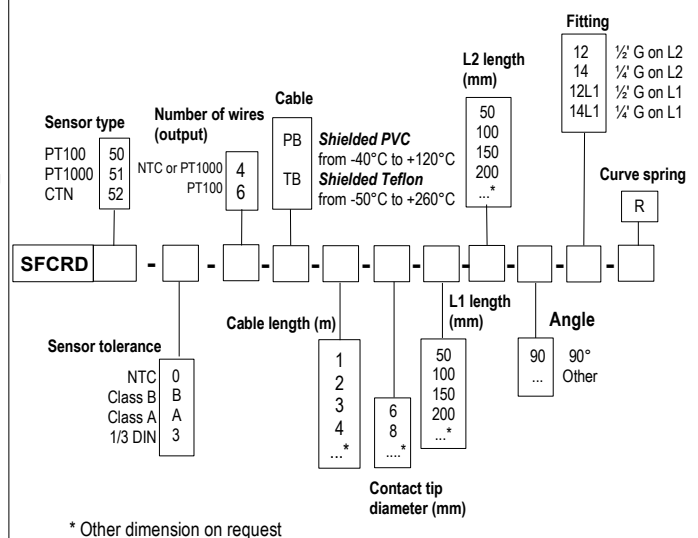

Example : SFCRD51-B-4-PB-1-6-100-100-90-12-R

Model : PT1000 temperature probe class B, 4 wires, shielded PVC cable of 1m length. Stainless steel contact tip Ø 6 mm angled at 90° and L1 and L2 lengths of 100 mm, with thread fitting ½ G fixed on L2, and with curve spring. **Measuring range from -40 to +120°C.**

## Tolerances\* of Pt100 and Pt1000 probes

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
From -20°C to 0°C	± 0,5°C
From 0°C to +70°C	± 0,2 °C
From +70°C to +100°C	± 0,5 °C

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.

## Accessories (see related data sheet)


- Transmitter output 4-20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- 1/4, 1/2 gas screw nut
- Sliding connection
- Teflon or stainless steel ferrule for compression fitting
- Sleeve to weld for food industry (with 1/2" G female)
- Stainless steel junction fitting
- 1/2 gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell







## ■ Probes dimensions

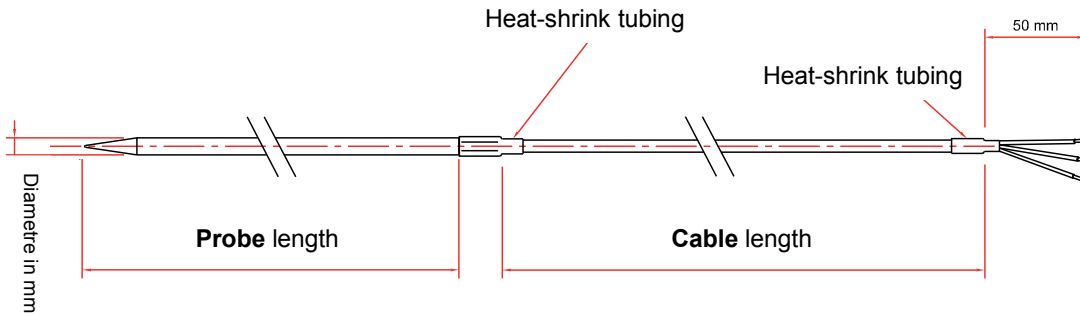

## ■ Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26


Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## ■ Tolerances of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

## ■ Accessories (See Datasheet)

- Transmitter output 4/20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel junction fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



*Temperature probe with needle ended tip  
at resistive element*



PT 100

**Type SFPP 50**

**SFPP 50 - SFPPD 50 /  
SFPPC 50 - SFPPCD 50**





■ **Probe features**

- Penetration temperature probe mounted on straight or angled handle.
- Measuring range (according to cable) :  
from **-50°C to +400°C** (PT100 et PT1000).  
from **-20°C to +120°C** (NTC).
- **2 wires output** (SFPP, SFPPC) or  
**4 wires output** (SFPPD, SFPPCD) for **NTC** and **PT1000**
- **3 - 4 wires output** (SFPP, SFPPC) or  
**6 wires output** (SFPPD, SFPPCD) for **PT100**.
- For other resistance types PT25, PT50, PT500, PT200 or NI, please contact us.

■ **Transmitter features**

- Working temperature**.....from -50°C to +400°C (PT100 and PT1000)  
(According to cable) from -20°C and +120°C (NTC)
- Accuracy \***.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table
- Sensor type**.....**PT100 or PT1000** : class B, class A, 1/3 DIN  
as per DIN IEC751  
NTC : resistance at 25°C,  $R_{25} = 10K\Omega$  Nominal  
Beta value B25/85 = 3,695K ±1%
- Storage temperature**.....from -20°C to +80°C
- Working temperature of the cable**.....**Shielded PVC** : from -40°C to +120°C  
**Silicone** : from -50°C to +180°C  
**Shielded Teflon (PFA)** : from -50°C to +260°C  
**Glass silk with stainless steel sheet** : from -50°C to +400°C
- Mounting of output cable**.....Cable or stainless steel flexible 7 mm Ø output.  
Waterproof flexible optional on demand  
Curve spring optional (except stainless steel flexible output)
- Contact tip**.....4.5 or 6 mm Ø in 316 L stainless steel  
Needle ended tip  
Handle : **Straight** 10 mm Ø length 100 mm  
**Angled** at 90° length 90 mm  
Other on request.

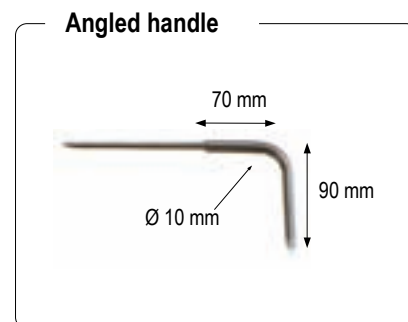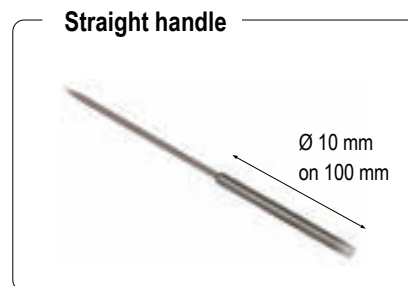

Tightness is optional for use in wet or submerged places

# SFPP 50 & SFPPD 50

Tapping probe with cable and handle in simple pair or multipair assembly


Straight handle probe on cable




Straight handle probe on flexible



## Probe dimensions

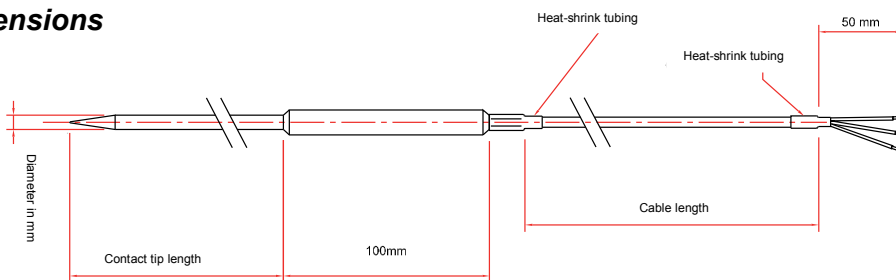


## Optional : waterproof

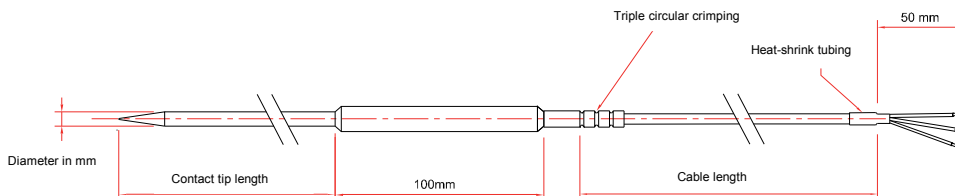

## Part numbers

Straight handle probes are available with simple pair or multipair electrical assembly :

### Single pair probe – Ref. SFPP 50

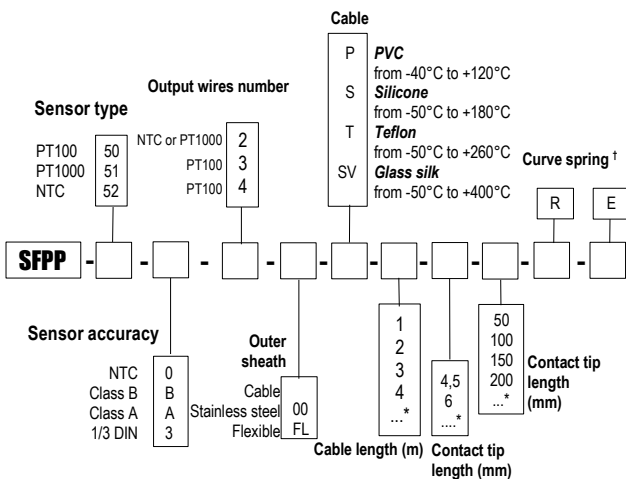


\* Other length available on request  
 † No curve spring on flexible outlet (FL)  
 \*\* E for submerged use in compliance with rules of use

#### Example : SFPP51-B-2-00-P-1-45-100

Model : PT1000 temperature probe Class B, 2 wires, outer sheath in PVC cable of 1m length. Stainless steel contact tip Ø 4,5 mm tapping with right handle, length 100 mm, without curve spring. **Measuring range from -40 to +120°C.**

### Multipair Probe – Ref. SFPPD 50

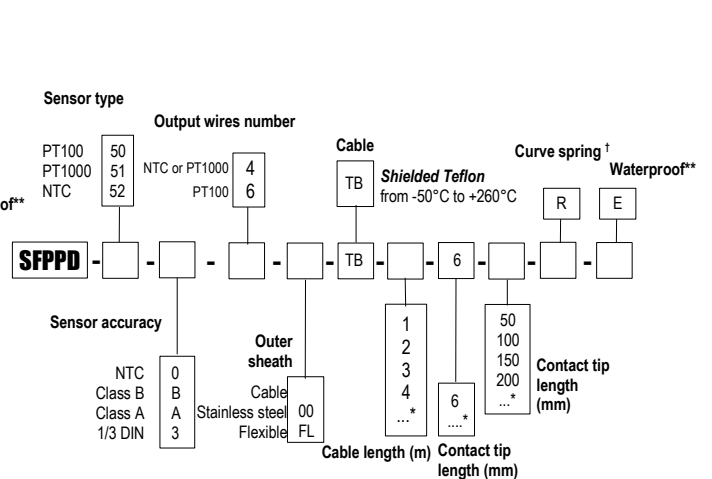

\* Other length available on request  
 † No curve spring on flexible outlet (FL)  
 \*\* E for submerged use in compliance with rules of use

#### Example : SFPPD51-B-4-00-TB-1-6-100

Model : PT1000 temperature probe, Class B, 4 wires multipair mounting, outer sheath in shielded cable Teflon of 1m length. Stainless steel contact tip 6 mm Ø tapping with right handle, length 100 mm, without curve spring. **Measuring range from -50 to +260°C.**

# SFPPC 50 & SFPPCD 50

Angled handle tapping probe with cable  
in simple pair or multipair assembly

Angled handle probe on cable





Angled handle probe on flexible



PT 100

## Dimensions probe

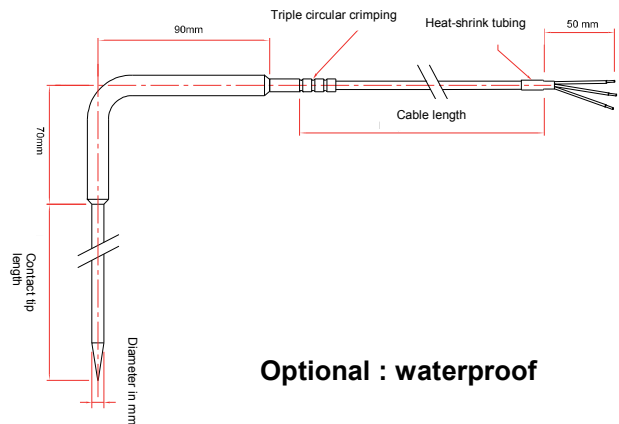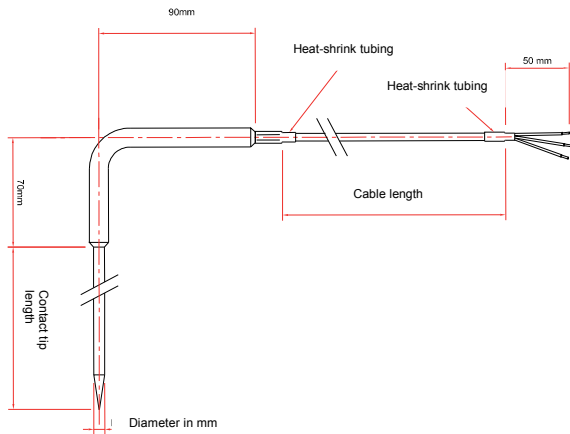


Optional : waterproof


## Part numbers

Angled handle probes are available with simple pair or multipair electrical assembly :

### Single pair probe – Ref. SFPPC 50

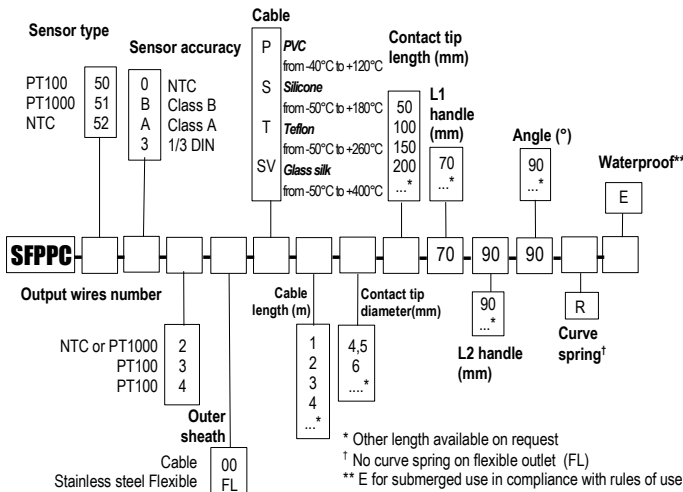

### Multipair Probe – Ref. SFPPCD 50

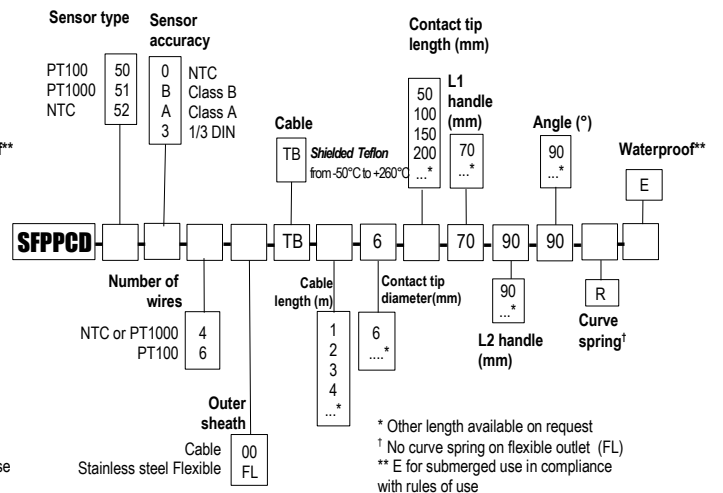

Example : SFPPC51-B-2-00-P-1-45-100-70-90-90

Model : PT1000 temperature probe Class B, 2 wires, outer sheath in PVC cable of 1m length . Stainless steel contact tip Ø 4,5 mm tapping with angled handle, L1 length 70mm and L2 length 90 mm, angled handle of 90°, without curve spring. **Measuring range from -40 to +120°C.**

Example : SFPPCD51-B-4-00-TB-1-6-100-70-90-90

Model : PT1000 temperature probe, Class B, 4 wires, outer sheath in cable shielded Teflon of 1m length . Stainless steel contact tip Ø 6 mm tapping with angled handle of L1 length of 70mm and L2 length of 90 mm, angled handle of 90°, without curve spring. **Measuring range from -50 to +260°C.**

## Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Tolerances of NTC probes

Measuring range °C	Tolerances °C
From -20°C to 0°C	± 0,5°C
From 0°C to +70°C	± 0,2 °C
From +70°C to +100°C	± 0,5 °C

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- 1/4 " or 1/2" Gas screw nut
- Compression fitting
- Teflon or stainless steel ferrule for compression fittings
- Raccord de fixation alimentaire
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



**T handle temperature probe with cable at resistive element**


**SFPPT 50 / SFPPTD 50**



**Probe features**

- Temperature probe à piquer mounted on T handle.
- Measuring ranges (according to cable):  
 from **-50°C to +400°C (PT100 and PT1000)**  
 from **-20°C to +120°C (CTN)**.
- 2-wire output (SFPPT) or  
 4-wire output (SFPPTD) for NTC and PT1000
- 3-4 wire output (SFPPT) or  
 6-wire output (SFPPTD) for PT100.
- For other resistance types PT25, PT50, PT500, PT200 or NI, please contact us.


**Penetration end piece**



**Part numbers**

T handle probes are available with **simple pair or multipair electrical assembly** :


**• Single pair probe – Ref. SFPPT 50**

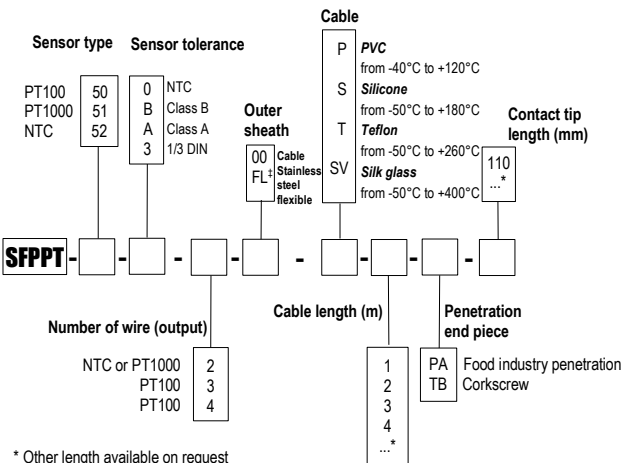

\* Other length available on request  
 ‡ impossible for probe with corkscrew contact tip

**Example : SFPPT50-B-3-00-P-2-PA-110**  
 Model : PT100 temperature probe, Class B, 3 wires, outer sheath in PVC cable of length 2 m. Stainless steel contact tip 4,5 mm Ø for food industry penetration of length 110 mm with shrinking type penetration end piece. **Measuring range from -40 to +120°C.**

**• Multipair probe – Ref. SFPPTD 50**

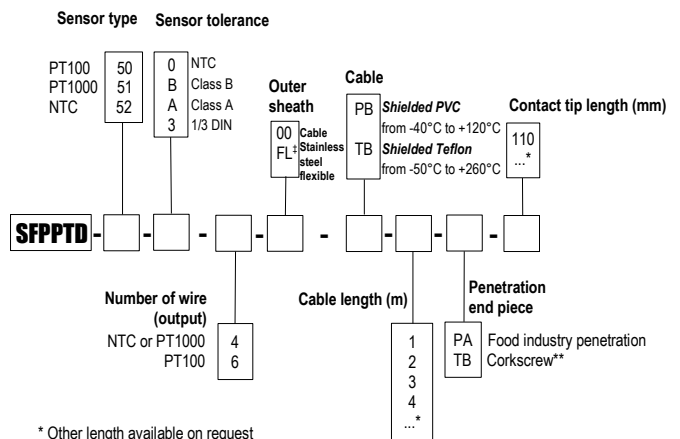


\* Other length available on request  
 ‡ impossible for probe with corkscrew contact tip  
 \*\*No Jack plug output

**Example : SFPPTD50-A-6-00-TB-2-PA-110**  
 Model : PT100 temperature probe, Class A, multipair assembly 6 wires, outer sheath in shielded Teflon cable of length 2m. Stainless steel contact tip 4,5 mm Ø for food industry penetration of length 110 mm with shrinking type penetration end piece. **Measuring range from -50 to +260°C.**


PT 100

## ■ Dimensions probes

### • Probe with smooth contact tip

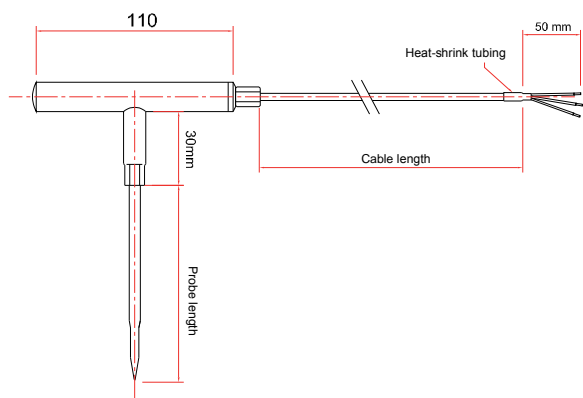

### • Probe with corkscrew contact tip

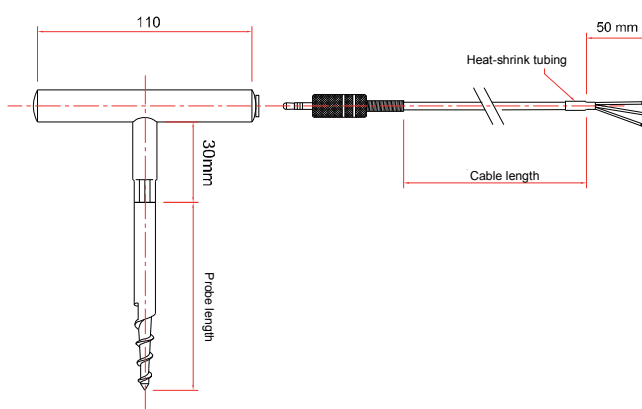

## ■ Tolerance\* of PT100 and PT1000 probes.

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms.

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature  
 i.e : at 0°C for PT1000 Class B  $\pm 0,3^\circ\text{C} \rightarrow \pm 1,2 \Omega$

## ■ Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
From -20°C to 0°C	$\pm 0,5^\circ\text{C}$
From 0°C to +70°C	$\pm 0,2^\circ\text{C}$
From +70°C to +100°C	$\pm 0,5^\circ\text{C}$

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.


## ■ Accessories (See data sheet)

- DIN Rail transmitter output 4/20 mA or 0/10V
- Calibration certificate

**Temperature probe  
with cable at resistive element  
for contact measurement by eyelet**



BT 100

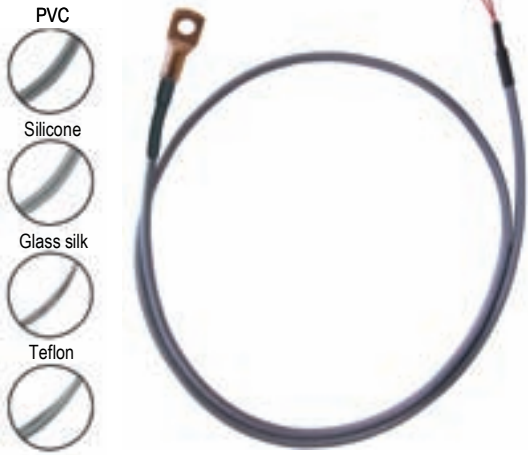


**Probe features**

- Temperature probe mounted on conductor cables with stainless steel contact tip and perforated copper eyelet (Ø 6.3 mm).
- Measuring range (according to cable) :  
 from **-50°C to +400°C (PT100 et PT1000)**.  
 from **-20°C to +120°C (NTC)**.
- 2 wires output (SFO) or 4 wires (SFOD) for NTC and PT1000  
 3 or 4 wires output (SFO) or 6 wires (SFOD) for PT100.
- For other resistance types PT25, PT50, PT500, PT200 or NI, please contact us.


**Part numbers**

**• SFO 50 - Single pair probe -**

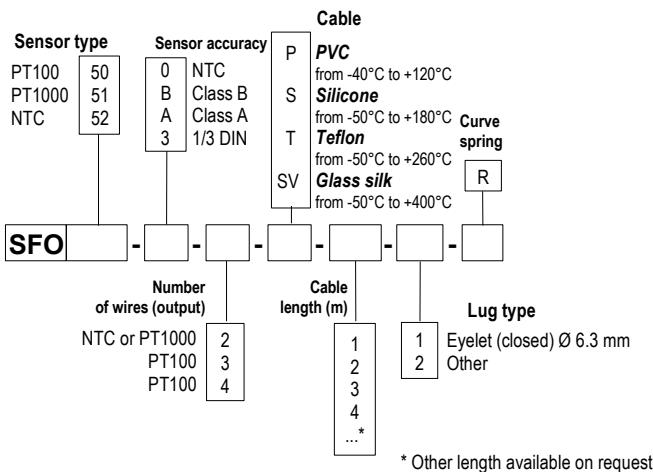

**Example : SFO51-B-2-P-1-2**  
 Model : Pt 1000 temperature sensor, Class B, 2 wires, PVC cable of 1m length.  
 Stainless steel contact tip 4.5 mm Ø , length 60 mm, with a copper eyelet perforated Ø 6.3 mm, without curve spring. **Measuring range from -40 to +120°C.**

**• SFOD 50 - Multipair Probe -**

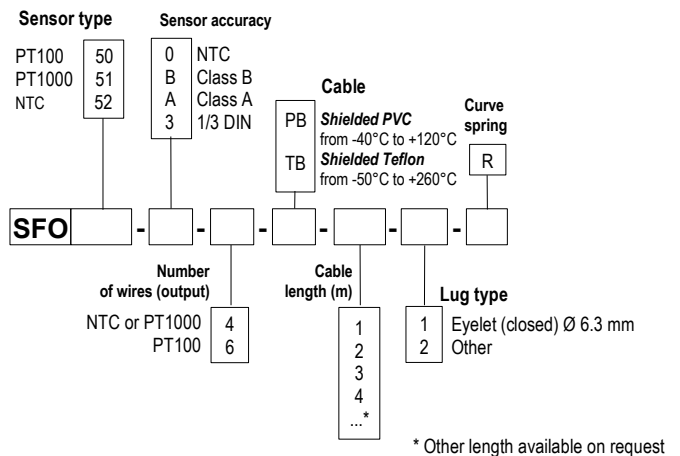


**Example : SFOD51-B-4-P-1-2**  
 Model : Pt 1000 temperature sensor, 4 wires, shielded Teflon cable of 1m length.  
 Stainless steel contact tip 5 mm Ø , length 60 mm, with a copper eyelet perforated Ø 6.3 mm, without curve spring. **Measuring range from -40 to +120°C.**




## Probes dimensions

### • Front view

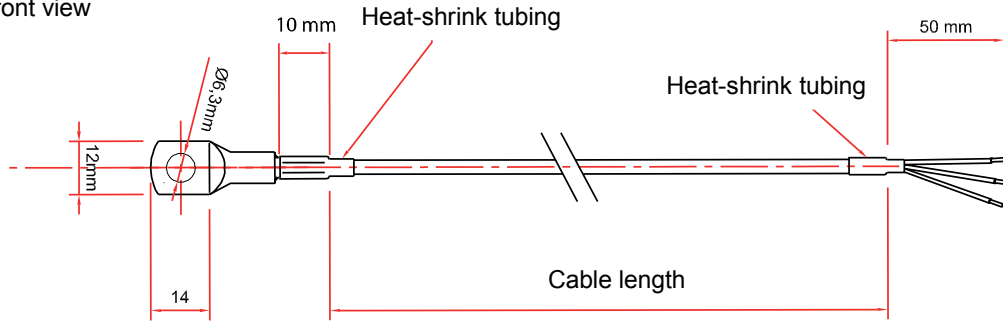

### • Side view



## Tolerance of PT100 and PT1000 probes.

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms.

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances of NTC probes


Measuring range °C	Tolerances °C
From -20°C to 0°C	± 0,5°C
From 0°C to +70°C	± 0,2 °C
From +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.


*Probe with self adhesive patch*

**SFSC 50**

- Probe with thin and flexible laminar resistance.
- Enables good response times.
- Measuring range : **from -70°C to +200°C**

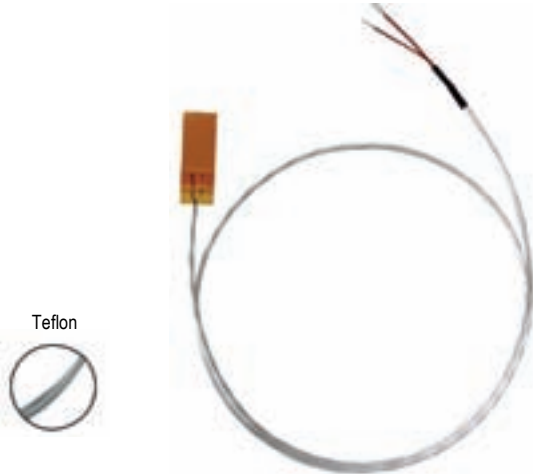

■ **Part numbers**

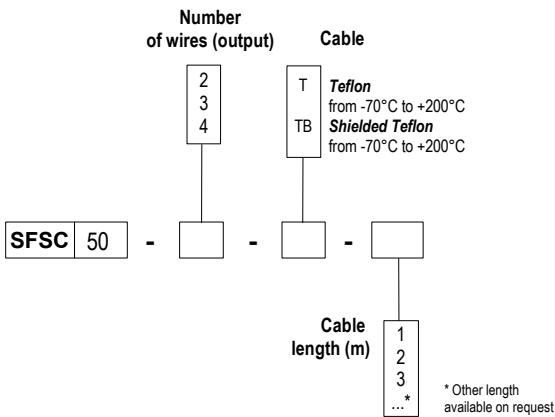


**Example : SFSC50-3-T-4**  
**Model :** Pt 100 temperature sensor, Class A, 3 wires, Teflon cable of 4 m length. **Measuring range from -70 to +200°C.**

■ **Transmitter features**

- Operating temperature**.....from -70°C to +200°C
- Accuracy \***.....± (0.15°C + 0.002 ltl)  
 thus ± 0.15°C at 0°C  
 and ± 0.35°C at 100°C
- Sensor type**.....PT100 Class A  
 Single pair  
 as per IEC751
- Dimensions**.....50 x 20 mm and 0.3 mm depth
- Insulation**.....polyimide
- Cable**.....T : Pfa 2 or 3 conductors  
 TB : Shielded Pfa 2, 3 or 4 conductors
- Storage temperature**.....from -20°C to +80°C

■ **Probe dimensions**

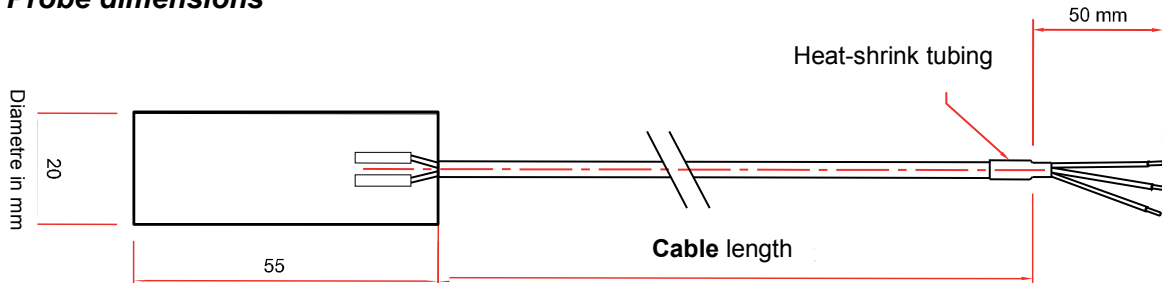

## Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26


Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2 °C
from +70°C to +100°C	± 0.5 °C

## Accessories (see data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel junction fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



### Colle silicone transparente

For watertightness and sticking.  
Ready to use. Moisture cured.  
Flexible at high and low temperature.  
UV and time resistant.  
Tube of 90 ml.

- Part number : KI - TCS





## Surface contact wire temperature probe


### SFCS 50 / SFCSD 50

- Temperature probe with copper tip for surface contact
- Measuring ranges (according to cable) **from -50°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC)
- Wire mounting: **simple** (2,3 or 4 wires).  
**duplex** (4 or 6 wires)
- For other resistance types (PT25, PT50, PT500, PT200 or NI, please contact us)

PT 100


#### Part numbers

##### • SFCS – Single pair probe -

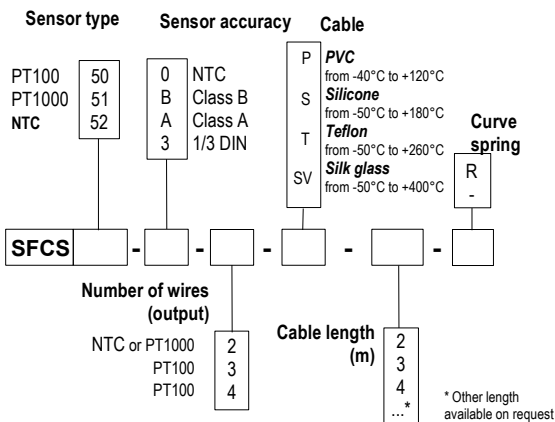

**Example: SFCS50-B-3-P-4**  
Model: Class B PT100 temperature probe, 3-wire, PVC cable length 4m, without curve spring. Measuring range from -40 to +120°C.

##### • SFCSD – Multipair probe -

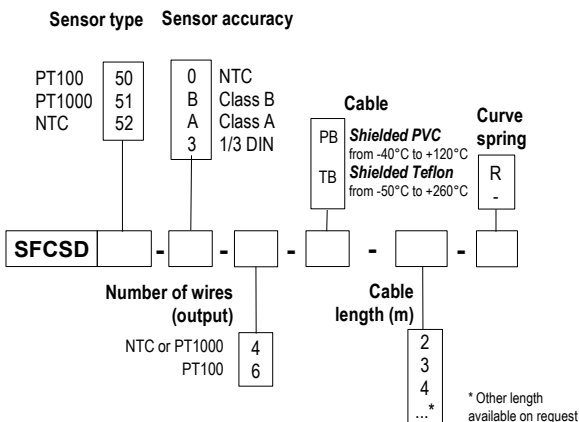

**Example : SFCSD50-B-6-PB-4**  
Model : Class B Pt100 temperature probe, 6-wire, shielded PVC cable length 4m without curve spring. Measuring range from -40 to +120°C.

#### Transmitter features

Operating temperature.....for SFCS types  
(according to cable) from -50°C to +400°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)

for SFCSD types  
from -50°C to +250°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)

Accuracy.....PT100 or PT1000: see « Tolerances » table  
NTC: see "Tolerances" table

Sensor type.....PT100 or PT1000: Class B, Class A,  
1/3 DIN as per DIN IEC751  
NTC: resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta value B25/85 = 3,695K ±1%

Wire mounting.....single pair, 2, 3 or 4 wires

**multipair 4 or 6 wires**




Storage temperature.....from -20°C to +80°C

Contact tip.....40 x 16 x 7,5mm  
Ø 6,3 mm hole  
made of copper

Operating temperature  
for cable.....PVC : from -40°C to +120°C  
Silicone: from -50°C to +180°C  
Teflon (PFA): from -50°C to +260°C  
Silk glass: from -50°C to +400°C

## Dimensions

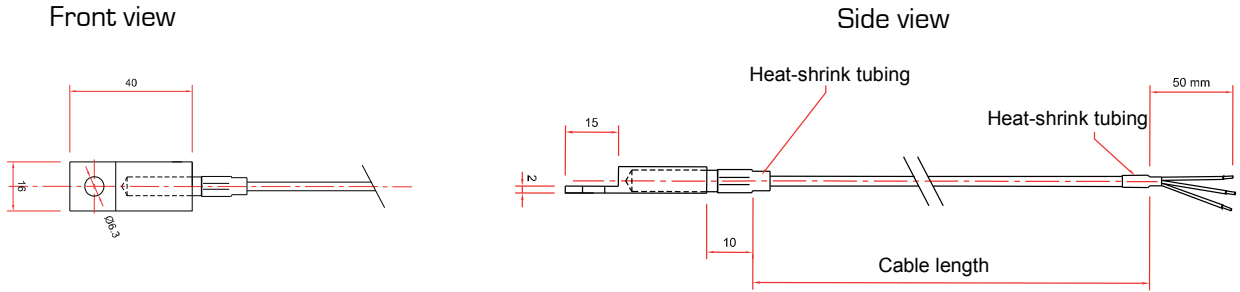

## Tolerances\* of Pt100 and Pt1000 probes

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms.

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
From -20°C to 0°C	± 0,5°C
From 0°C to +70°C	± 0,2 °C
From +70°C to +100°C	± 0,5 °C

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.

## Accessories (see related data sheet)

- Transmitter output 4-20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- 1/4, 1/2 gas screw nut
- Sliding connection
- Teflon or stainless. steel ferrule for compression fitting



- Sleeve to weld for food industry (with 1/2" G female)
- Stainless steel junction fitting
- 1/2 gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






## Temperature probe with cable for pipe

### SFCT50 / SFCTD50

- Temperature probe with contact tip for pipe (all diameter).
- Measuring range (according to cable)
  - from **-50°C to +400°C** (PT100 and PT1000).
  - from **-20°C to +120°C** (NTC).
- 2 wires for NTC and PT1000 outputs, 3 or 4 wires for PT100 output.
- For other resistance types PT25, PT50, PT500, PT200 or NI, please contact us.


#### Part numbers

##### • SFCT – Single pair probe -

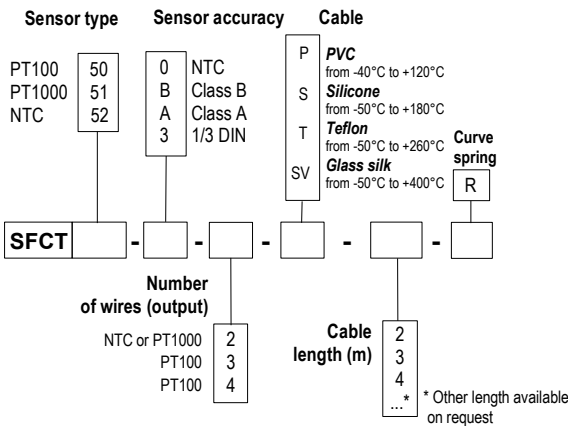

Example : SFCT50-B-3-P-4  
 Model : Pt 100 temperature probe, Class B, 3 wires, PVC cable of 4 m length without curve spring. Measuring range from -40 to +120°C.

##### • SFCTD – Multipair Probe -

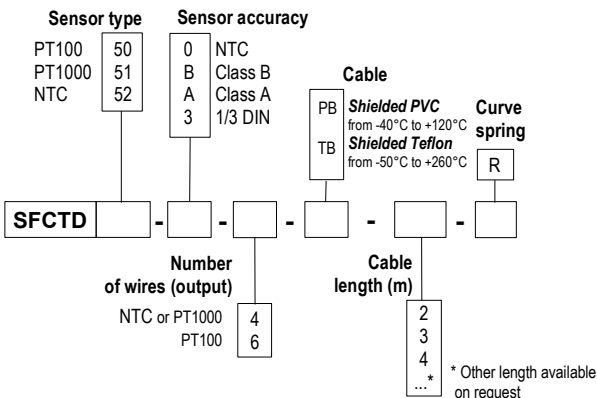

Example : SFCTD50-B-6-PB-4  
 Model : Pt 100 temperature probe, Class B, 6 wires, PVC cable of 4 m length without curve spring. Measuring range from -40 to +120°C.

#### Transmitter features

Operating temperature.....for SFCT type  
 (According to cable) from -50°C to +400°C (PT100 and PT1000)  
 from -20°C to +120°C (NTC)

for SFCTD type  
 from -50°C to +250°C (PT100 and PT1000)  
 from -20°C to +120°C (NTC)

Accuracy\*.....PT100 or PT1000 : see "Tolerances" table  
 NTC : see "Tolerances" table

Sensor type of sensor.....PT100 or PT1000 : Class B, Class A  
 and 1/3 DIN as per DIN IEC751  
 NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ Nominal  
 Beta value B25/85 = 3.695K ±1%

Wire mounting.....single pair 2, 3 or 4 wires


Storage temperature.....multipair 4 or 6 wires from -20°C to +80°C

Contact tip.....40 x 16 x 8,5 mm  
 V shape  
 screw fastener  
 made of AU4G (aluminium)

Connection.....supplied with stainless steel adjustable ring for DN 100. Other adjustable ring available on request

Operating temperature of cable.  
 PVC : from -40°C to +120°C  
 Silicone : from -50°C to +180°C  
 Teflon (PFA) : from -50°C to +260°C  
 Glass silk with stainless steel sheet : from -50°C to +400°C

## ■ Probes dimensions

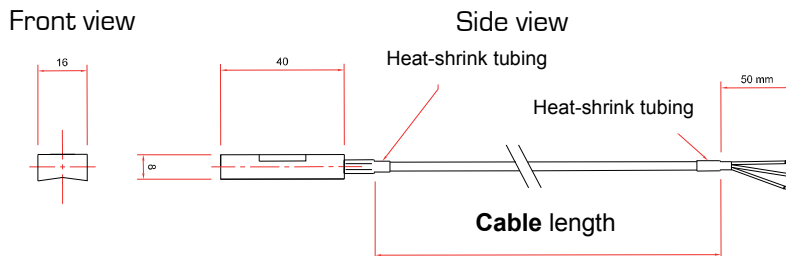

## ■ Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26


\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## ■ Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

## ■ Accessories (See related datasheet)

- Transmitter output 4/20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings




- Sleeve to weld for food industry
- Stainless steel junction fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell




**Wire temperature probe with resistive element and bayonet**

**SFBA 50 / SFBAD 50**

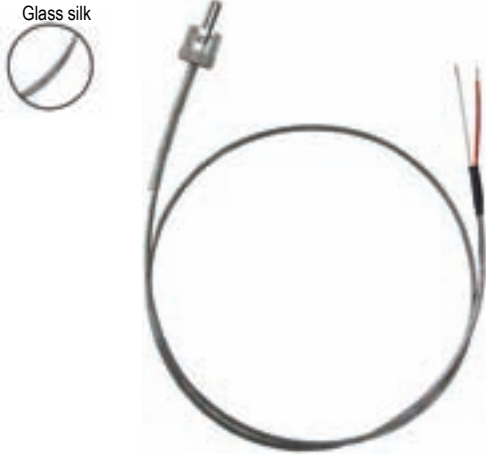

**Part numbers**

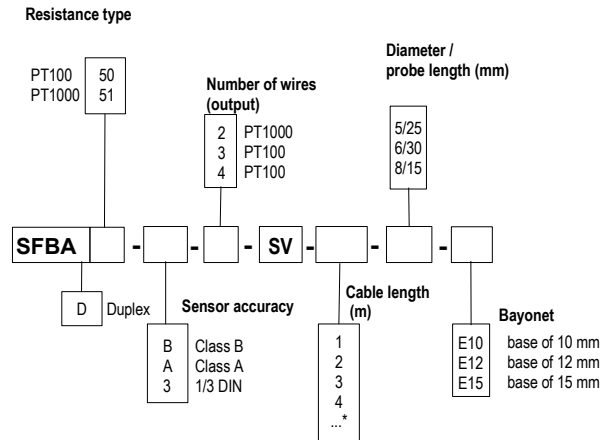

\* Other dimension available on request

**Example : SFBA51-B-2-SV-1-630-E12**  
Model: Pt 1000 bayonet temperature probe, Class B, 2-wire, silk glass cable 1m long.  
Stainless steel probe Ø 6 mm and 30mm length.  
Bayonet for 12mm thread.  
Measuring range from -50 to +400°C.

**Probe features**


- Temperature probe mounted on conductive cable, with stainless steel contact tip and bayonet probe.
- Measuring ranges (according to cable) : **from -50°C to +400°C (PT100 and PT1000).**
- For other resistances (PT25, PT50, PT500, PT200 or NI), please contact us

**Technical features**

- Working temperature**.....from -50°C to +400°C
- Accuracy \***.....**PT100 or PT1000** : see "Tolerances" table
- Sensor type**.....**PT100 or PT1000** : class B, class A, 1/3 DIN, as per DIN IEC751
- Storage temperature**.....-20°C to +80°C
- Probe**.....316 L stainless steel.  
5/25 : Ø 5 mm and length 25 mm  
6/30 : Ø 6 mm and length 30 mm  
8/15 : Ø 8 mm and length 15 mm
- Cable**.....output on glass silk cable, stainless steel armoured.  
2, 3 or 4 conductors 0,22 mm<sup>2</sup>.  
Temperature range: from -50 to +400°C
- Bayonet**.....bayonet connection (2 pins)  
nickel brass, for Ø 10, 12 or 14 mm thread  
to screw on 200mm spring

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.

**Probe dimensions**

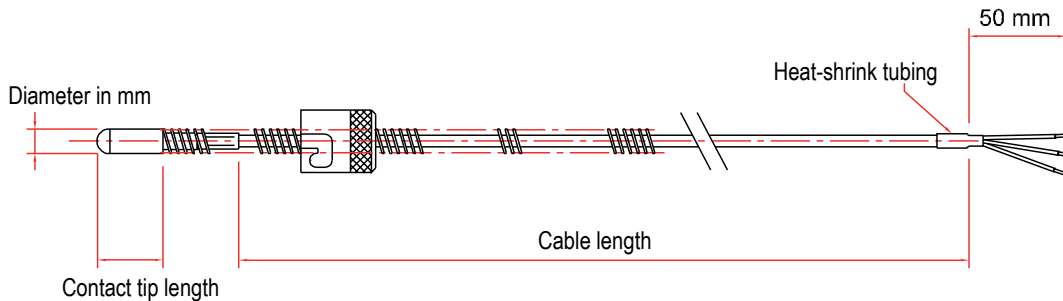



## Tolerances\* of Pt100 and Pt1000 resistive probes

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω

## Tolerances\* of NTC resistive probe

Temperature range in °C	Tolerances °C
From -20°C to 0°C	± 0,5°C
From 0°C to +70°C	± 0,2 °C
From +70°C to +100°C	± 0,5 °C

\* Performed in laboratory conditions, the above accuracies mentioned in this document will be guaranteed, provided that you use the calibration compensation data or identical calibration conditions.


## Accessories (see datasheet)

- 4-20 mA or 0/10V output transmitter
- Wall fixing support
- Stainless steel mounting brackets
- 1/4, 1/2 gas screw net
- Compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry (with 1/2" G female)
- Stainless steel union fitting
- 1/2 gas or NPT thread cut
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



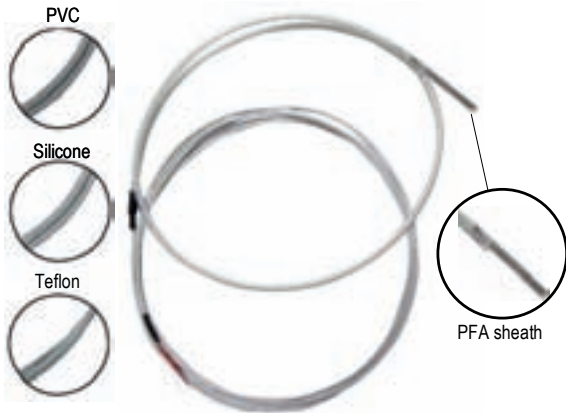


**Cable temperature probe at resistive element for aggressive environment**

**SF GT 50 – SFGTD 50**

**Part numbers**

**• SFGT**

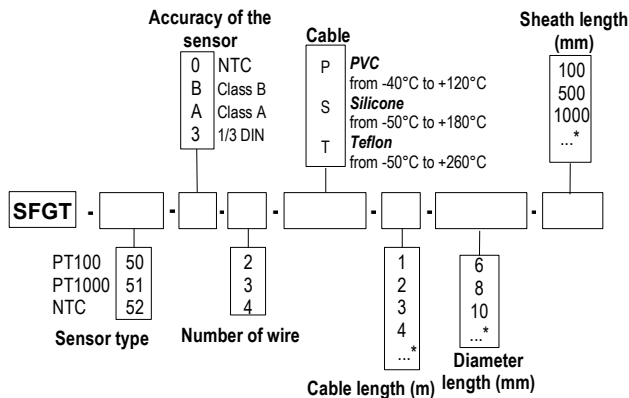


\* Other dimension on request

Example : SFGT50-B-3-P-3-6-500

Model : Temperature sensor PT100 Class B, 3 wires, PVC cable of 3 m length and of 6 mm diameter with a sheath of 500 mm length.

Measuring range : from -40 to +120 °C

**• SFGTD**

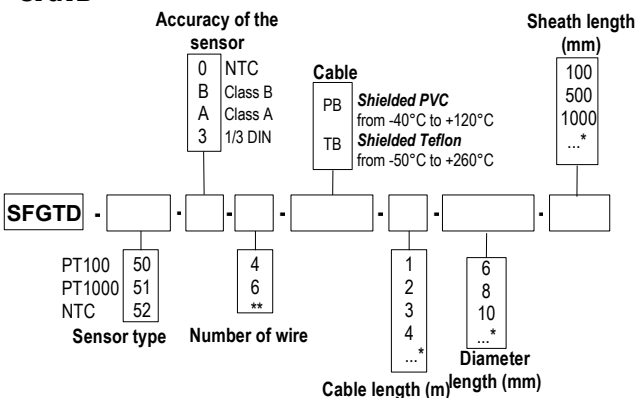

\* Other dimension on request

\*\* no 6 wires for output 6 mm, or mounting with stainless steel protection

Example : SFGTD50-B-6-PB-3-8-500

Model : Multipair temperature sensor PT100 Class B, 6 wires, shielded PVC cable of 3 m length and of 8 mm diameter with a sheath of 500 mm length.

Measuring range : from -40 to +120 °C

**Probe features**

- Temperature sensor mounted under PFA sheath
- Measuring range from -50°C to +550°C (PT100 and PT1000) from -20 °C to +120 °C (NTC)
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

**Technical features**

Operating temperature.....from -50°C to +250°C (PT100 and PT1000) (According to cable) from -20°C to +120°C (NTC)

Accuracy.....PT100 or PT1000 : see "Tolerances" table  
NTC : see "Tolerances" table


Type of sensor.....PT100 or PT1000 : Class B, Class A, 1/3 DIN as per DIN IEC751  
NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%

Storage temperature.....from -20°C to +80°C

Operating temperature.....PVC : from -40 to +120 °C  
Silicone : from -50 to +180 °C  
Teflon (PFA) : from -50 to +260 °C

Contact tip.....perfluoralkoxy (PFA) sheath temperature max.  
At short term use : 280 °C  
Softening at +/- 327 °C

## Dimensions

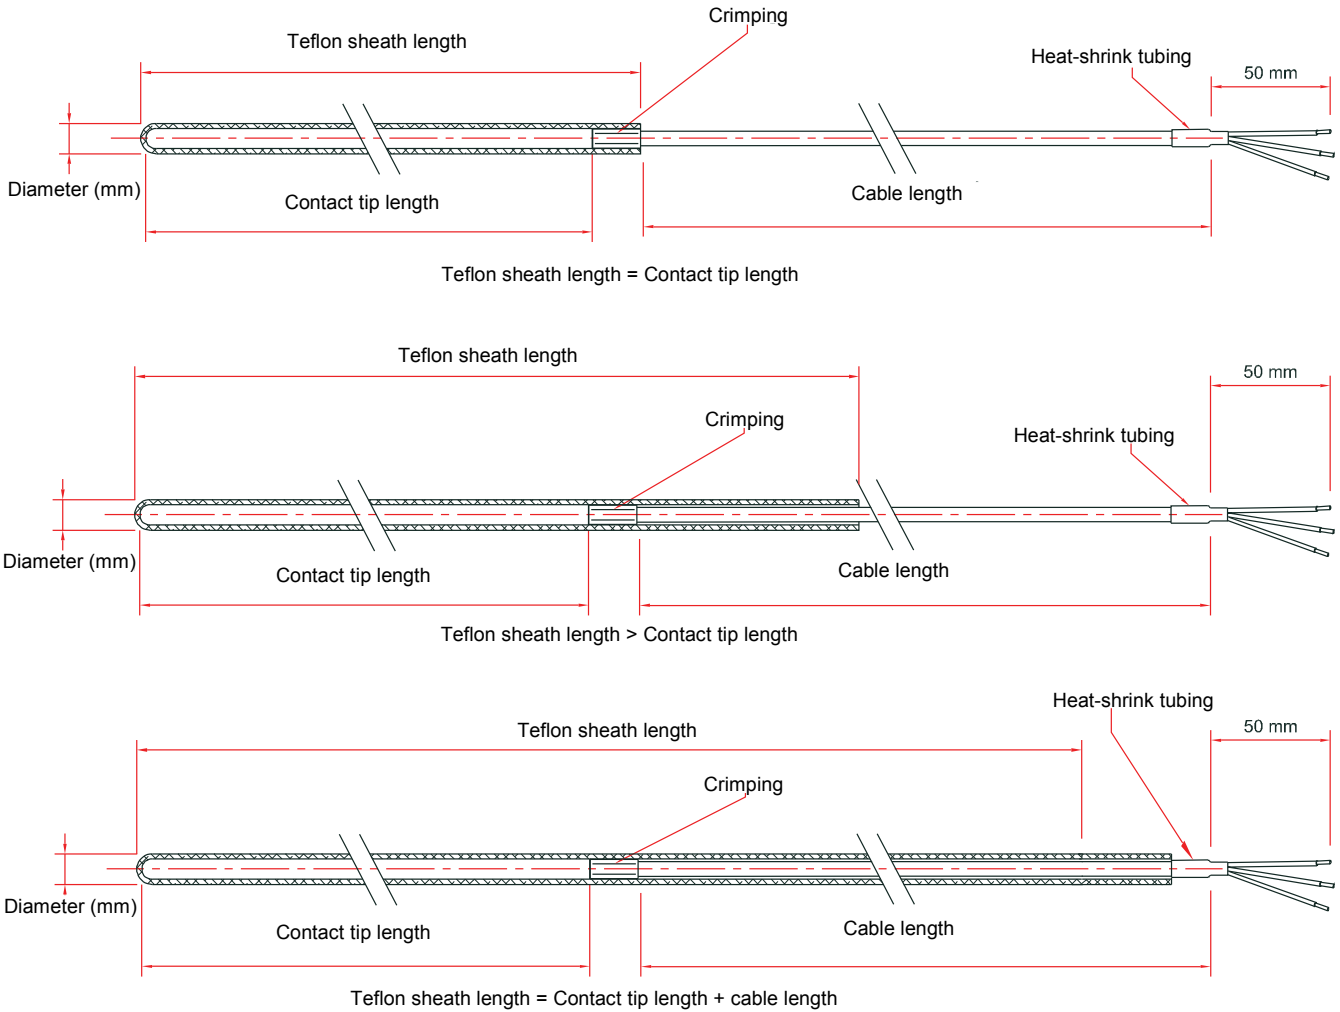

## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

## Tolerances\* of PT100 and PT1000 probes

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



**Part 2 : Head resistive element**



**SG 50**  
with ABS head housing.....p 43



**SG 100**  
with ABS head .....p 45



**TM 50**  
temperature transmitter.....p 49



**TG 100**  
temperature transmitter.....p 51



**TM 100**  
temperature transmitter.....p 55



**TST**  
thermostats.....p 59



**TB 50**  
standard connection head.....p 63



**TBBT 50**  
for very low temperature use.....p 65



**TBHT 50**  
for very high temperature use.....p 67



**TM 50**  
miniature connection head.....p 69



**TE 50**  
waterproof.....p 71



**TP 50**  
noryl.....p 73



**THIR 50**  
with DIN 43650 head.....p 75



**TM 12 50**  
Plug-in head.....p 77



**TBEI 50**  
with interchangeable mountings...p 79



**TBRD 50**  
with offset fitting.....p 83



**TBAJ 50**  
with ambient tip.....p 85



**TBC 50**  
bent RTD sensor.....p 87



**TBCT 50/TMCT 50**  
for contact duct.....p 91



**TBB 50**  
standard with mounting flange....p 95



**TBRC 50**  
standard with clamp fitting.....p 97



**TPGT 50**  
for aggressive application.....p 99



**TPTT 50**  
for aggressive application.....p 101



**Wine application**  
head or cable probe.....p 103



**Fermenting room**  
grip handle PT 100 probe.....p 107



**Compost**  
PT 100 probe.....p 109

PT 100






**Temperature sensor  
with ABS head housing  
SG 50**

- Temperature sensor with stainless steel probe.
- Measuring ranges from -50°C to +100°C (PT100 and PT1000).  
from -20°C to +100°C (NTC).
- Terminal block connection, output 2, 3 or 4 wires.
- ABS IP65 housing.
- With or without stainless steel compression fitting, 1/2" cylindrical gas (other available on request).
- Quick and easy mounting 1/4" turn system with wall-mount plate.
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**

To order, just add the codes to complete the part number :

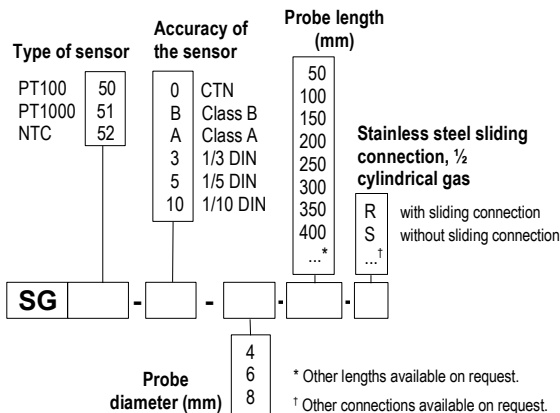


**Example : SG51-B-4-100-R**


Model : Temperature sensor PT1000 Class B. Stainless steel probe Ø 4 mm, length 100 mm, with stainless steel sliding connection 1/2 cylindrical gas on IP65 ABS housing. Measuring range from -50 à +100°C.

**Housing dimensions**


(including wall-mount plate)



**Without compression fitting**



**With compression fitting**



**For thermowell using**  
Thread model : add 20 mm to probe length.  
Fixing screw model : add 10 mm to probe length.

**Transmitter features**

Measuring ranges	from -50°C to +100°C (PT100 and PT1000) from -20°C to +100°C (NTC)
Accuracy *	PT100 or PT1000 : see "Tolerances" table NTC : see "Tolerances" table
Type of sensor	PT100 or PT1000 : Class B, Class A, 1/3 DIN, 1/5 DIN, and 1/10 DIN as per DIN IEC751 NTC : resistance at 25°C, R <sub>25</sub> = 10KΩ Nominal Beta B25/85 value = 3.695K ±1%
Probe	316 L stainless steel, 3/4 to 4/4 hard, no welding
Compression fitting	316 L stainless steel, 1/2"G male
Environment	air and neutral gases


\*all accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

**Housing features**


Housing	ABS
Fire-proof classification	H-B as per UL94
Dimensions	See drawings beside
Protection	IP 65
Cable grid	for cables Ø 7mm maxi
Weight	110g
Working temperature	from -20°C to +80°C

**Mounting**

Installation : mount the ABS plate on the wall (this plate is supplied with the transmitter). Drilling : Ø 6 mm (with the screws and pins supplied with the transmitter). Insert the transmitter on the plate (see A on the drawing below) and rotate its housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed. For models with duct mount, an additional drilling of Ø14mm must be made before mounting the ABS plate.

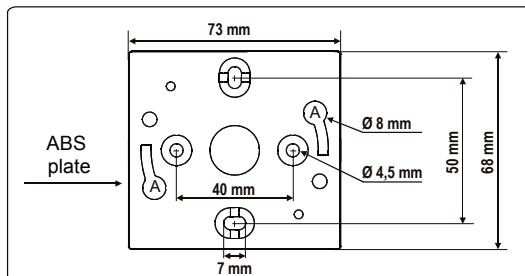


## Electrical connection – as per NFC15-100 norm

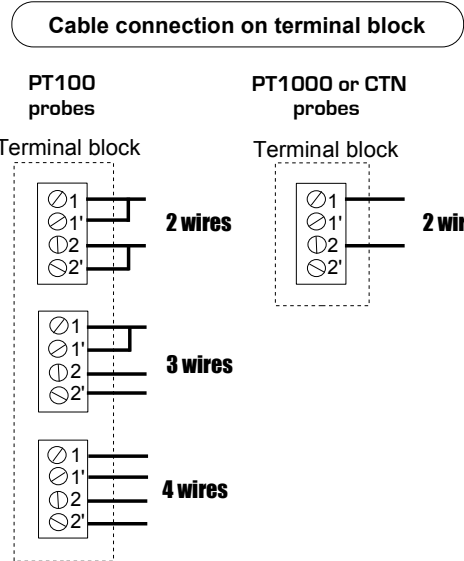


## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances									
	Class B		Class A		1/3 DIN		1/5 DIN		1/10 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-50	0.55	0.22	0.25	0.1	0.19	0.08	0.11	0.04	0.06	0.02
0	0.3	0.12	0.15	0.06	0.1	0.04	0.06	0.02	0.03	0.01
100	0.8	0.3	0.35	0.13	0.27	0.1	0.16	0.05	0.08	0.03

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances of NTC probes


Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

## Maintenance

Clean the housing and probe only with cloth dampened with soapy water. Please avoid any of the following solvents at any concentration : petrol, petroleum, acetone, trichloroethylene, ammonia, acid, bicarbonate soap or bleach.

## Accessories (See Datasheet)

- Stainless steel compression fitting
- Stainless steel mounting brackets
- Thermowells

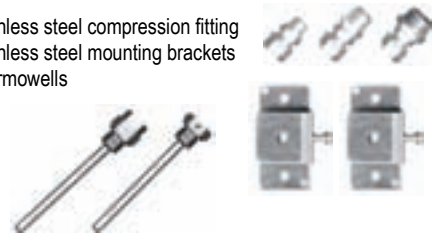

Ref. FTang - SG50 - 09/07 A – We reserve the right to modify the characteristics of our products without notice.




**Temperature sensor  
with ABS head  
SG 100**

- Temperature sensor with a PT100 Class A stainless steel probe.
- Measuring range from 0 to +50°C, from -20 to +80°C, from -50 to +50°C, from 0 to +100°C. (According to model, see "Configuration").
- 0-10 V output, active sensor, power supply 24 Vac/Vdc (3-4 wires) or 4-20 mA output, passive loop, power supply 18 to 30 Vdc (2 wires).
- ABS IP 65 housing, with or without display.
- Quick and easy mounting 1/4" turn system with wall-mount plate.
- LCC100 configuration software (optional).
- With or without stainless steel sliding connection, 1/2" cylindrical Gas.

**Part numbers**

To order, just add the codes to complete the part number :

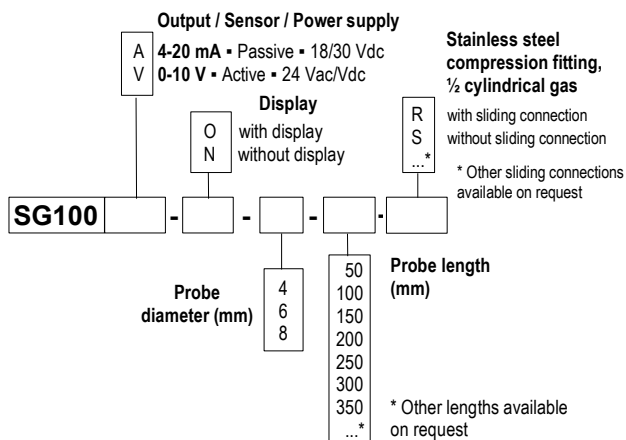


**Example : SG100 - V - O - 4 - 100 - R**


Model : PT100 Class A temperature sensor, with display.  
Stainless steel probe Ø 4, length 100 mm with stainless steel compression fitting 1/2" cylindrical gas on IP65 ABS housing. 0-10V active sensor with a 24 Vac/Vdc power supply.

**Housing dimensions**


(including wall-mount plate)



**Without compression fitting**



**With compression fitting**



**For thermowell using**  
Thread model : add 20 mm to probe length.  
Fixing screw model : add 10 mm to probe length.

**Transmitter features**

- Measuring range..... see table ("configuration")
- Units of measurement..... °C, °F
- Accuracy\*..... ±0,5% of reading ±0,4°C (PT100 Class A)
- Resolution..... 0,1°C
- Type of sensor..... PT 100 Class A as per DIN IEC751
- Working temperature (probe)..... from -50°C to +100°C
- Probe..... 316 L stainless steel, 3/4 to 4/4 hard, no welding
- Compression fitting..... 316 L stainless steel, 1/2"G male

\*all accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

**Technical specifications**

- Output / Power supply..... active sensor 0-10 V (power supply 24 Vac/Vdc ± 10%), 3-4 wires  
passive loop sensor 4-20 mA (power supply 18/30 Vdc), 2 wires  
maximum load : 500 Ohms (4-20 mA)  
minimum load : 1 K Ohms (0-10 V)
- Consumption..... 2 VA (0-10V) or max. 22 mA (4-20mA)
- Electro-magnetical compatibility..... EN 61326
- Electrical connection ..... screw terminal block for cables 1.5 mm² max
- Communication to PC..... Kimo RS 232 cable
- Environment..... air and neutral gases

WITH or WITHOUT display



**Housing features**

- Housing..... ABS
- Fire-proof classification..... H-B as per UL94
- Dimensions..... see drawings beside
- Protection..... IP 65
- Display..... 5- digits LCD. Dimensions 50 x 15 mm
- Height of the digits..... 10 mm
- Cable grip..... for cables Ø 7mm max.
- Weight..... 145g (with display) – 110g (without display)
- Working temperature (housing)..... from -20°C to +50°C (with display)  
from -20°C to +80°C (without display)



## Connection

For models  
SG 100 - V - O & SG 100 - V - N • Output 0-10 V – active sensor

Connection to PC  
LCC100 software

(a) Output terminal block  
(b) Power supply terminal block  
(c) Cable tubing  
(d) DIP Switch

**Power supply**

(b) Vdc.....direct voltage  
GND.....ground

**OR**

(b) Vac.....alternative voltage (phase)  
Vac.....alternative voltage (neutral)

**Output**

(a) GND.....ground  
Vdc T.....direct voltage (temperature)

(c) Cable grip : to insert the cable, it is required to slightly cut the rubber.

---

For models  
SG 100 - A - O & SG 100 - A - N  
• Output 4-20 mA – passive loop

(a) Vdc.....direct voltage  
IT.....direct current (temperature)

(a) Terminal block

## Electrical connection - as per norm NFC15-100

This connection must be made by a qualified technician. To make the connection, the transmitter must not be energized.

For models  
SG 100 - V - O & SG 100 - V - N • Output 0-10 V – active loop

**4 wires**

Output terminal block: GND, Vdc T  
Power supply terminal block: Vdc, GND

Regulator display or PLC / BMS: - (GND), + (Passive type)

Power supply: 24 Vdc or 24 Vac Class II

**OR**

**3 wires**

To make a 3-wire connection, before powering up the transmitter, connect the ground to the output of the input ground. See drawing below.

Output terminal block: GND, Vdc T  
Power supply terminal block: Vdc, GND

Power supply: 24 Vdc or Phase Neutral Power supply 24 Vac

---

For models  
SG 100 - A - O & SG 100 - A - N • Output 4-20 mA – passive loop

**2 wires**

Output terminal block: Vdc, Ir  
Power supply: 18-30 Vcc

Regulator display ou PLC / BMS: - (GND), + (passive type)

**OR**

Output terminal block: Vdc, Ir

Regulator display or PLC / BMS: + (I in), - (active type)

## Configuration



You can configure all parameters of the transmitter : measuring ranges, units, output (according to model) either by DIP switch and/or via software (see below)

### Configuration by DIP switch

To configure the transmitter, please unscrew the 2 screws from the housing, and then open it.



Whilst configuring the transmitter, **it must not be energized**. Make the required setting with the DIP switches (as shown on the drawing beside). When the transmitter is configured, you can power it up.

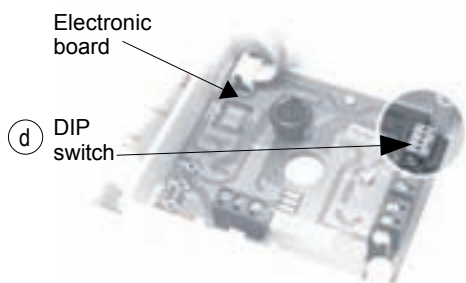

### Caution !

Please follow carefully the combinations shown alongside on the DIP switch. If the combinations are wrong, the following message will appear on the display of the transmitter "CONF ERROR". In that case, unplug the transmitter, set the DIP switches correctly, and then power up the transmitter.

### Units setting

To set measuring unit, set the on-off DIP switch, as shown alongside.

Configurations	°C	°F
Combinations	1	1
	2	2
	3	3
	4	4

### Measuring range setting

To set the measuring range, set the on-off switches 1, 2 and 3 of the measuring range, as shown alongside.

Measuring ranges

Configurations	0 to 50 °C	-20 to 80 °C	-50 to 50 °C	0 to 100 °C
Combinations	1	1	1	1
	2	2	2	2
	3	3	3	3
	4	4	4	4

### Initialization of the transmitter

When the transmitter is powered up, it initializes and displays the digits , and then its configuration including :  
 - The measuring range - The analogue output.

#### 1 - The measuring range.

The following message is displayed : . This is the low value of the measuring range, and its digit value : **ex** :

The following message is displayed : . This is the high value of the measuring range and its digit value : **ex** :

The arrow displayed (at the bottom or on the right of the screen) is relative to the unit of measurement : **ex** : from 0 to 100 °C.

#### 2 - The analogue output.


If the analogue output is in 4-20mA, then the following message will appear :

If the analogue output is 0-10 V, then the following message will appear :

After the display of the configurations, the transmitter displays , which confirms that the initialization is finished and you can start the measurements.

**Configuration via software**  
(with optional LCC100 software)

**Easy, user-friendly configuration with the software !**  
You can configure your own intermediate ranges.



Example : for a transmitter with a range of -50 to +100°C, the minimum configurable range is 20°C. For example, you can configure your transmitter with a range from -20 to +80°C, or from +80 to +100°C...

- To access the configuration via software, first of all, set the DIP switch as shown below, then connect the cable to the transmitter (see alongside and refer to "Connection").
- **Please refer to the user manual of the LCC 100 to make the configuration.**




**Caution !**

The configuration of the parameters can be done either with the **DIP switch**, or via **software** (you cannot combine both methods).

**Mounting**

Installation : mount the ABS plate on the wall (this plate is supplied with the transmitter). Drilling : Ø 6 mm (with the screws and plugs supplied with the transmitter). Insert the transmitter on the plate (see A on the drawing beside) and rotate its housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed.  
For the model with duct mount, an additional hole Ø14mm must be made before mounting the ABS plate.

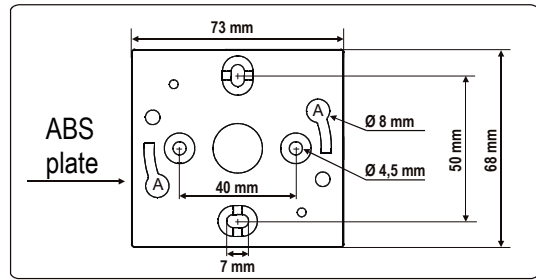

**Tolerance of the PT100 Class A.**

Temp°C	Tolerances Class A	
	± °C	± Ohms
-50	0.25	0.1
0	0.15	0.06
100	0.35	0.13

**Maintenance**

Clean the housing and probe only with cloth dampened with soapy water. Please avoid any of the following solvents at any concentration : petrol, petroleum, acetone, trichloroethylene, ammonia, acid, bicarbonate soap or bleach.


**Options**

- Power supply class 2, input 230 Vac, output 24 Vac, **ref.KIAL-100A**
- Power supply class 2, input 230 Vac, output 24 Vdc, **ref.KIAL-100C**
- Configuration LCC 100 software with RS 232 cable




**Accessories (See Datasheet)**

- Stainless steel compression fitting
- Stainless steel mounting brackets
- Thermowells

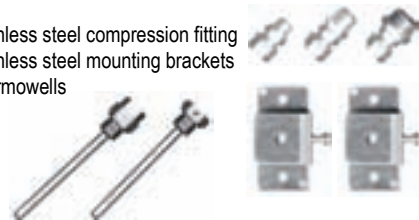

Ref. FTang - SG100 - 09/07 A - We reserve the right to modify the characteristics of our products without notice

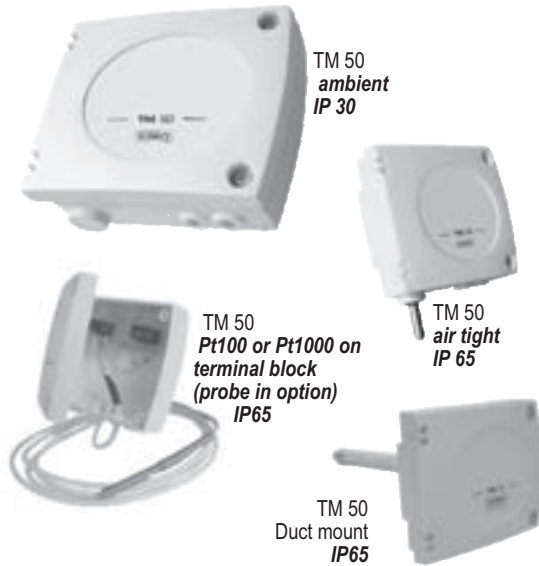

## Temperature transmitter TM 50

- Temperature transmitter type TM 50/51
- Pt100 3 wires output or Pt1000 2 wires (according to the model)
- ABS IP65 and IP 30 housing, without display
- Quick and easy mounting "1/4 turn" system with wall-mount plate

### ■ Features of the transmitter

#### Temperature

Working principle : a platinum resistance (Pt 100 or Pt1000) is a resistance with a positive temperature coefficient which varies according to the temperature. The higher the temperature is, the more the value of the resistance increases.

**Example :** for 0°C  $\simeq$  100  $\Omega$  - for 100°C  $\simeq$  138,5  $\Omega$  (Pt100)  
for 0°C  $\simeq$  1000  $\Omega$  - for 100°C  $\simeq$  1385  $\Omega$  (Pt1000)

**Measuring range**.....-20 to +80°C (air tight and duct mount model)  
+10 à +40°C (ambient model)


**Accuracy\***.....Pt100 class A as per DIN IEC751  
Pt1000 class A as per DIN IEC751

**Response time**.....1/e (63%) 5 sec. (ambient model)  
1/e (63%) 20 sec. (air tight model)  
depending on the probe (Pt100 on terminal block)

**Type of fluid**.....air and neutral gases

### ■ Part number

To order, just add the code to complete the part number



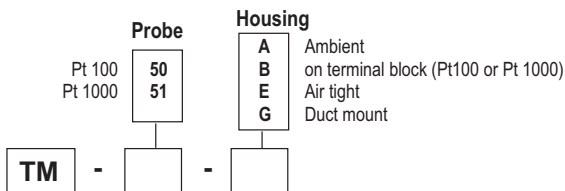


Example : TM 50-A

Model : temperature transmitter TM 50, ambient housing IP 30.

### ■ Dimensions

(with wall-mount plate)

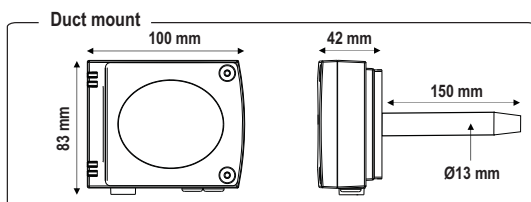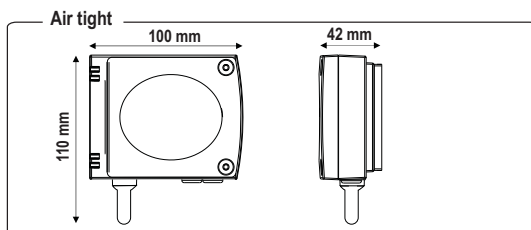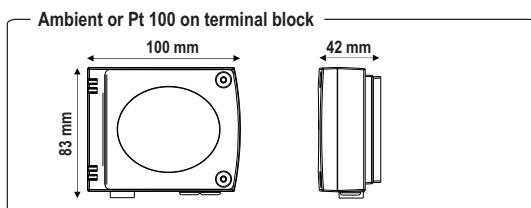

### ■ Features of the housing

**Housing**.....ABS

**Fire-proof classification**.....HB as per UL94

**Dimensions**.....see drawing beside

**Protection**.....IP 65 (air tight, duct mount and Pt100 on terminal block models)  
IP 30 (ambient model)

**Cable grip**.....for cables  $\varnothing$  7 mm max.

**Weight**.....110 g

### ■ Technical specifications

**Output**.....Pt100 (3 wires) or Pt1000 (2 wires)

**Electrical connection**.....screw terminal block for cables  $\varnothing$  1.5 mm<sup>2</sup> max.

**Working temperature**.....-20 to +80°C (air tight model)

+10 to +40°C (ambient model)


depending on the probe (Pt100 on terminal block)

**Storage temperature**.....-10 to +70°C

**Environment**.....air and neutral gases


\*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Connection



For the model



**TM 50-B** • Pt100 or Pt1000 input and output on terminal block

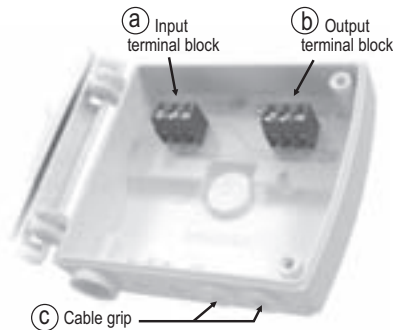

(c) Cable grip : to insert the cable, it is required to slightly cut the rubber.



For the model

**TM 50-A and TM 51-G** • Pt100 output on terminal block  
**TM 51-A and TM 51-G** • Pt1000 output on terminal block

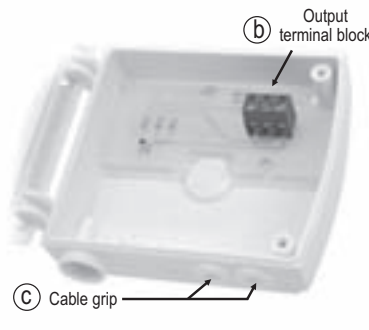

For the model

**TM 50-E** • Pt100 output on terminal block  
**TM 51-E** • Pt1000 output on terminal block

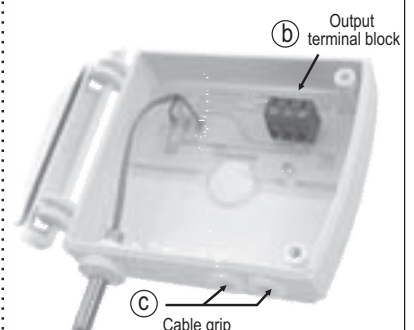


## Pt 100 connections

⚠ This connection must be made by a qualified technician.


For the model

**TM 50-B** • Input and output Pt100 on terminal block

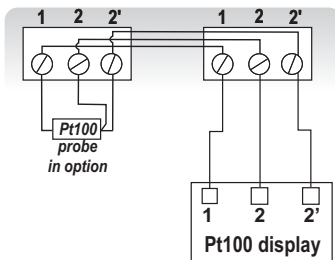

For the model

**TM 50-A and TM 50-E** • output Pt100\* on terminal block  
**TM 51-A, TM 51-G and TM 51-E** • output Pt1000\* on terminal block

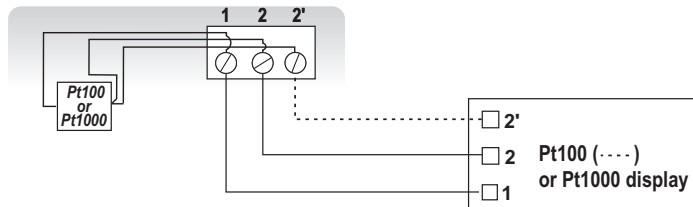

\* Pt100 connection is usually made in 3 wires; the third wire is dedicated to resistance compensation of the connection cables.


\* With Pt1000, the resistance of connection cables has less influence on the measurement than with Pt100. Therefore, Pt1000 cabling is generally made with only 2 wires.

## Mounting

Installation : mount the ABS plate on the wall (this plate is supplied with the transmitter).

Drilling :  $\varnothing 6$  mm with the screws and pins supplied with the transmitter.

Insert the transmitter into the plate (see points A of the drawing shown beside), by tilting it at  $30^\circ$ . Rotate the housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed.

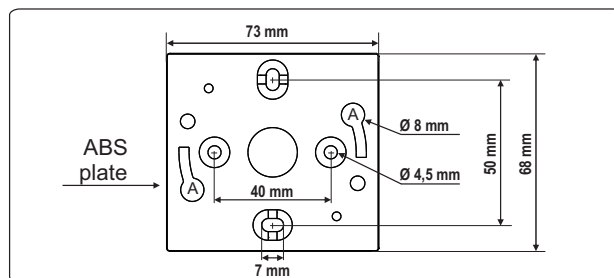

## Maintenance

Please avoid any aggressive solvent.

Please protect the transmitter and its probes from any cleaning product containing formol, that may be used for cleaning rooms or ducts.


## Options

- Pt 100 or Pt1000 temperature probes



Ref. FT ang - TM 50 - 06/05 B - We reserve the right to modify the characteristics of our products without notice.

**New** 

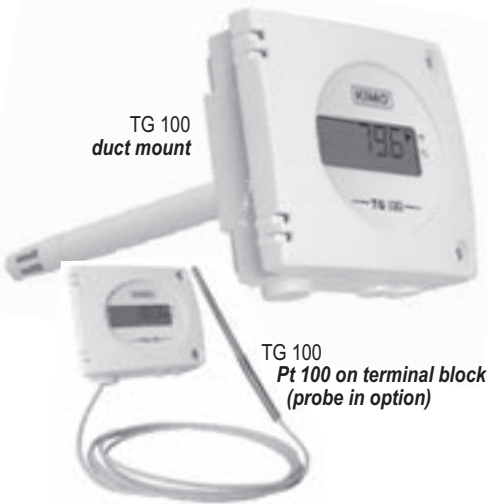


**Temperature transmitter  
TG 100**

- Duct temperature transmitter, TG100 type
- Measuring ranges from 0 to +50°C, -20 to +80°C, -50 to +50°C, 0 to +100°C, 0 to 200°C, 0 to +300°C, 0 to +400°C (according to model, see "Configuration")
- 0-10 V output, active sensor, power supply 24 Vac/Vdc (3-4 wires) or 4-20 mA output, passive loop, power supply 18 to 30 Vdc (2 wires)
- ABS IP 65 housing, with or without display
- Quick and easy mounting "1/4 turn" system with wall-mount plate


**Part number**

To order, just add the codes to complete the part number :

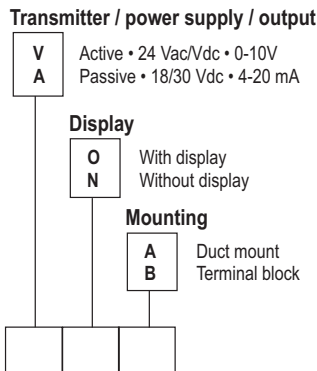

Example : TG100-VOA  
Model : temperature transmitter TG 100 active sensor 0-10 V output, with display and duct mount probe.

**Dimensions of the housing**  
(with wall-mount plate)

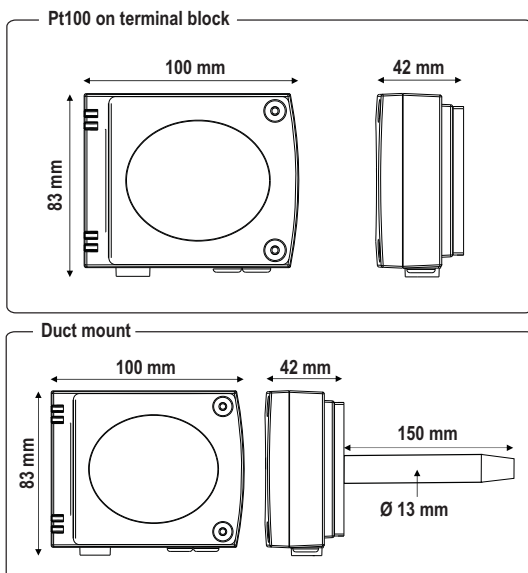

**Features of the transmitter**

**Temperature**

Working principle : Pt100 is a resistance with a positive temperature coefficient which varies according to the temperature. The higher the temperature is, the more the value of the resistance increases.  
Example : for 0°C  $\approx$  100  $\Omega$  - for 100°C  $\approx$  138,5  $\Omega$

- Measuring range .....see chart "Configuration"
- Units of measurement ..... °C, °F
- Accuracy \* .....  $\pm 0,5\%$  of reading  $\pm 0,4^\circ\text{C}$  (duct mount probe) according to the probe (Pt 100 on terminal block)
- Response time ..... 1/e (63%) 5 sec. (duct mount probe) according to the probe (Pt 100 on terminal block)
- Resolution ..... 0,1°C
- Type of sensor.....Pt 100 class A as per DIN IEC751
- Type of fluid..... air et neutral gases

WITH or WITHOUT display

**Features of the housing**

- Housing .....ABS
- Fire-proof classification .....HB as per UL94
- Dimensions .....see drawings beside
- Protection .....IP 65
- Display .....5- digit LCD. Dimensions 50 x 15 mm
- Height of the digits .....10 mm
- Cable grip .....for cables  $\varnothing$  7mm maxi.
- Weight.....145g (with display) - 110g (without display)

**Technical Specifications**

- Output / power supply ....active transmitter 0-10 V (power supply 24 Vac/Vdc  $\pm 10\%$ ), 3-4 wires  
passive loop 4-20 mA (power supply. 18/30 Vdc), 2 wires  
maximum load : 500 Ohms (4-20 mA)  
minimum load : 1 K Ohms (0-10 V)
- Consumption .....2 VA (0-10V) or max. 22 mA (4-20mA)
- Electro-magnetical compatibility .....EN 61326
- Electrical connection .....screw terminal block for cables  $\varnothing$  1.5 mm<sup>2</sup> max
- Communication to PC ..... Kimo RS 232 cable
- Working temperature (housing) .....0 to +50°C
- Working temperature (probe) .....-20 to +80°C (duct mount probe) according to the probe (Pt100 on terminal block)
- Storage temperature .....-10 to +70°C
- Environment .....air and neutral gases

\*All the accuracies indicated in this technical datasheet were stated in laboratories conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

PT 100




## Configuration

It is possible to configure the measuring ranges, the units, the output of the transmitter (according to the model) either by **DIP switch** and/or via **software** (connections ③ and ④ on drawing "connection")

### Configuration by DIP switch

To configure the transmitter, please unscrew the 2 screws from the housing, and then open it.

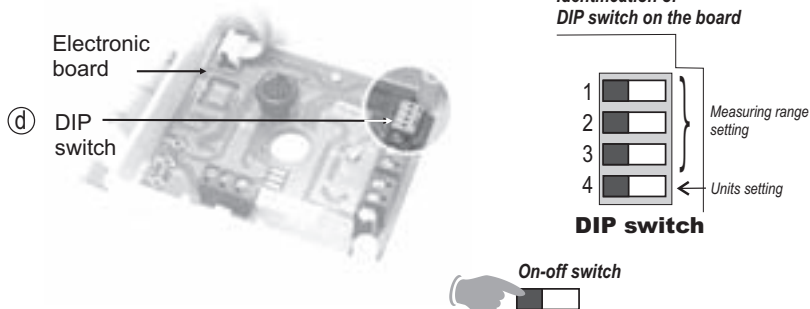

To configure the transmitter, it **must not be energized**. Then, you can make the settings required, with the DIP switches (as shown on the drawing beside). When the transmitter is configured, you can power it up.

#### Caution !

Please follow carefully the combinations beside with the DIP switch.

If the combinations are wrong, the following message will appear on the display of the transmitter "CONFERROR". In that case, you will have to unplug the transmitter, place the DIP switches correctly, and then power the transmitter up.

### Units setting

To set the measuring unit, please put the on-off switch 4 of units, as shown beside.

Configurations	°C	°F
Combinations	1 <input type="checkbox"/>	1 <input type="checkbox"/>
	2 <input type="checkbox"/>	2 <input type="checkbox"/>
	3 <input type="checkbox"/>	3 <input type="checkbox"/>
	4 <input checked="" type="checkbox"/>	4 <input checked="" type="checkbox"/>

### Measuring range setting

To set the measuring range, please put the on-off switches 1, 2 and 3 of the measuring range, as shown beside.

Configurations	Measuring range Pt 100 on terminal block							
	Measuring range duct mount							
	0 to 50 °C	-20 to 80 °C	-50 to 50 °C	0 to 100 °C	0 to 200 °C	0 to 300 °C	0 to 400 °C	
Combinations	1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>	1 <input type="checkbox"/>	
	2 <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>	2 <input type="checkbox"/>	
	3 <input type="checkbox"/>	3 <input type="checkbox"/>	3 <input type="checkbox"/>	3 <input type="checkbox"/>	3 <input type="checkbox"/>	3 <input type="checkbox"/>	3 <input type="checkbox"/>	
	4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>	4 <input type="checkbox"/>	

### Initialization the transmitter

When the transmitter is powered up, it initializes and displays the digits  $\overline{00000}$ ; and then its configuration including :  
 - the measuring range  
 - the analog output.

#### 1- The measuring range

The following message is displayed :  $\overline{Lo}$ . This is the low value of the measuring range, and its digit value : **ex** :  $\overline{0}$ .  
 The following message is displayed :  $\overline{Hi}$ . This is the high value of the measuring range and its digit value : **ex** :  $\overline{400}$ .  
 The arrow displayed (at the bottom or on the right of the screen) is relative to the unit of measurement : **ex** : from 0 to 400 °C.

#### 2- The analog output

If the analog output is in 4-20mA, then the following message will appear  $\overline{4-20}$ .  
 If the analog output is 0-10 V, then the following message will appear  $\overline{0-10V}$ .

After the display of the configuration, the transmitter displays  $\overline{-----}$ , which confirms that the initialization is finished and you can start the measurements.

PT 100



■ **Configuration via software**

(with optional LCC100 software)




**An easy and friendly configuration with the software !**

You can configure your own intermediary ranges.

Example : for a transmitter with a range of -100 to +400°C, the minimum configurable range is 20°C. For example, you can configure your transmitter with a range from -20 to +380°C, or from +300 to +320°C...

• To access the configuration via software, you must first position the **DIP switches** as per the following picture (shown beside), and then connect the cable to the transmitter (see beside and see "Connection").

• **Please refer to the user manual of the LCC 100 to make the configuration.**



**DIP switch**

**Caution !**


The configuration of the parameters can be done **either with the DIP switch, or via software** (you cannot combine both solutions).



■ **Mounting**

Installation : mount the ABS plate on the wall (this plate is supplied with the transmitter). Drilling : Ø 6 mm (with the screws and pins supplied with the transmitter). Insert the transmitter on the plate (see A on the drawing beside) and rotate its housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed.

For the model with duct mount, an additional drilling of Ø14mm must be done before mounting the ABS plate.

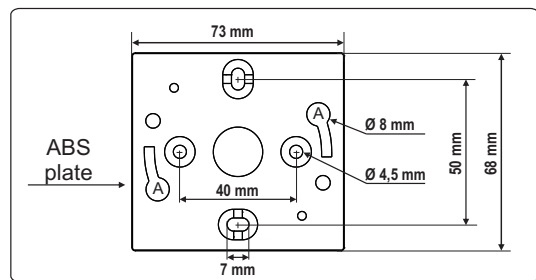

■ **Maintenance**

Please avoid any aggressive solvent.  
Please protect the transmitter and its probes from any cleaning product containing formol, that may be used for cleaning rooms or ducts.

■ **Options**

- Power supply class 2, input 230 Vac, output 24 Vac, ref.KIAL-100A
- Configuration LCC 100 software with RS 232 cable
- Temperature probes Pt100 3 wires (for model TG 100 on terminal block)



■ **Accessories**

- Connection tube
- Connection fittings
- Through-connections
- Straight connections
- Spherical coupling nut



Ref. FT ang - TG 100 - 12/08 C - We reserve the right to modify the characteristics of our products without notice.

**New**  
**CE**



TM 100  
ambient  
IP30



TM 100  
air tight  
IP65

## Temperature Transmitter TM 100

- Temperature transmitter type TM100.
- Measuring ranges from 0 to +50°C, -20 to +80°C, -50 to +50°C, 0 to 100°C (see "Configuration")
- 0-10 V or 4-20 mA output, active sensor, power supply 24 Vac/Vdc (3-4 wires) or 4-20 mA output, passive loop, power supply 18 to 30 Vdc (2 wires).
- ABS IP 65 and IP 30 housing, with or without display.
- Quick and easy mounting "1/4 turn" system on wall-mount plate.

### Features of the transmitter

#### Temperature

Working principle: Pt100 is a resistance with a positive temperature coefficient which varies according to the temperature. The higher the temperature is, the more the value of the resistance increases.  
Example : for 0°C  $\simeq$  100  $\Omega$  - for 100°C  $\simeq$  138,5  $\Omega$

Measuring range	.....0 to +50°C, -20 to +80°C, -50 to +50°C, 0 to +100°C
Units of measurement	.....°C, °F
Accuracy *	..... $\pm$ 0,5% of reading $\pm$ 0,4°C
Response time	.....1/e (63%) 5 sec. (ambient) 1/e (63%) 20 sec. (air tight)
Resolution	.....0,1°C
Type of sensor	.....Pt 100 class A as per DIN IEC751
Type of fluid	.....air and neutral gases

### Part number

To order, just add the codes to complete the part number :

#### Transmitter / Power supply / Output

<b>V</b>	Active • 24 Vac/Vdc • 0-10V
<b>A</b>	Passive • 18/30 Vdc • 4-20 mA
<b>AC</b>	Active • 24 Vac/Vdc • 4-20 mA

#### Display

<b>O</b>	With display
<b>N</b>	Without display

#### Housing

<b>A</b>	Ambient
<b>E</b>	Air tight



TM 100 - [ ] [ ] [ ] [ ]

Example : TM100-AOA

Model : temperature transmitter TM 100, passive loop 4-20 mA, with display and ambient housing.

### Dimensions of the housing

(including the wall-mount plate)

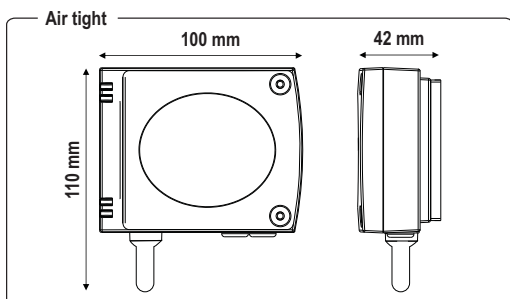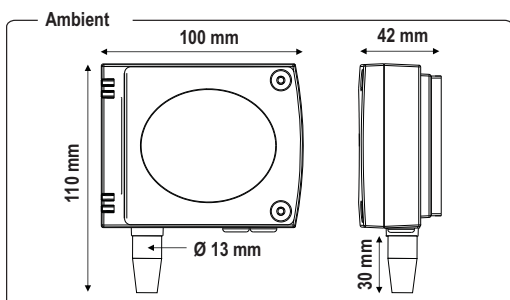

### Features of the housing

WITH or WITHOUT display

Housing	.....ABS
Fire-proof classification	.....HB as per UL94
Dimensions	.....see drawing shown beside
Protection	.....IP30 (ambient model) or IP65 (air tight model)
Display	.....5-digit LCD. Dimensions 50 x 15 mm
Height of the digits	.....10 mm
Cable grip	.....for cables $\varnothing$ 7 mm max.
Weight	.....145 g (with display) - 110 g (without display)

### Technical Specifications

Output / Power supply	...active sensor 0-10 V or 4-20 mA (power supply 24 Vac/Vdc) $\pm$ 10%, 3-4 wires passive loop 4-20 mA (power supply 18/30 Vdc), 2 wires maximum load : 500 Ohms (4-20 mA) minimum load : 1 K Ohms (0-10 V)
Consumption	.....2 VA (0-10V) or max. 22 mA (4-20 mA passive) max. 35 mA (4-20 mA active)
Electro-magnetical compatibility	.....EN 61326
Electrical connection	.....screw terminal block for cables $\varnothing$ 1.5 mm <sup>2</sup> max.
Communication to PC	.....Kimo RS 232 cable
Working temperature	.....+10 to +40°C (ambient model) -10 to +50°C (air tight model) -20 to +50°C (air tight model with no display)
Storage temperature	.....-10 to +70°C
Environment	.....air and neutral gases

\*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

PT 100

## Connection

For the models

**TM 100 - VOA,  
TM 100 - VNA,  
TM 100 - VOE,  
TM 100 - VNE**

• Output 0-10 V - **active**

(f) Connection to PC  
LCC 100 software

(b) Power supply  
terminal block

(c) Cable grip

(a) Output  
terminal block (d) DIP Switch

### Output

(a) 

⊖	GND	.....ground
⊕	Vdc T	.....direct voltage (temperature)

### Power supply

(b) 

⊖	Vdc	.....direct voltage
⊕	GND	.....ground

**OR**

(b) 

~	Vac	.....alternative voltage (phase)
~	Vac	.....alternative voltage (neutral)

(c) Cable grip : to insert the  
cable, it is required to slightly  
cut the rubber.

For the models

**TM 100 - ACOA, TM 100 - ACNA,  
TM 100 - ACOE, TM 100 - ACNE**

• Output 4-20 mA - **active**

(d) and (e) Switches

For the models

**TM 100 - AOA, TM 100 - ANA,  
TM 100 - AOE, TM 100 - ANE**

• Output 4-20 mA - **passive**

(a) Terminal  
block

(a) 

⊖	Vdc	.....direct voltage
⊕	It	.....direct current (temperature)

## Electrical connection - as per norm NFC15-100


**⚠** This connection must be made by qualified technician. To make the connection, the transmitter must not be energized.

For the models

**TM 100 - VOA, TM 100 - VNA, TM 100 - VOE, TM 100 - VNE**


• Output 0-10 V - **active**

**≡≡≡ 4 wires**

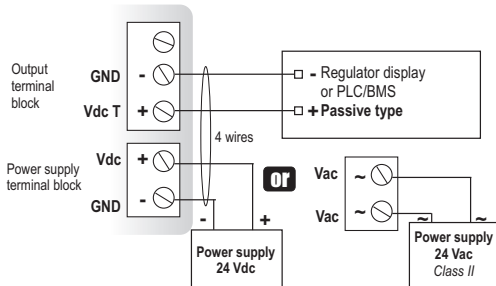

**≡≡≡ 3 wires**

**⚠** To make a 3-wire connection, **before powering up the transmitter**, please connect the output to the input ground. See drawing shown beside.

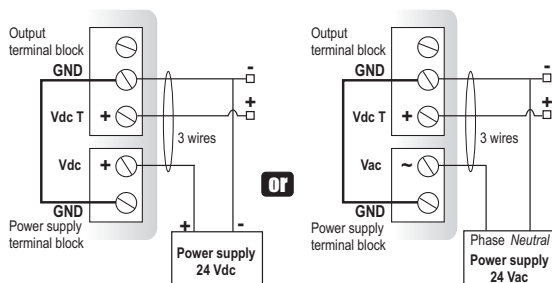


For the models

**TM 100 - ACOA, TM 100 - ACNA, TM 100 - ACOE, TM 100 - ACNE**


• Output 4-20 mA - **active**

**≡≡≡ 4 wires**

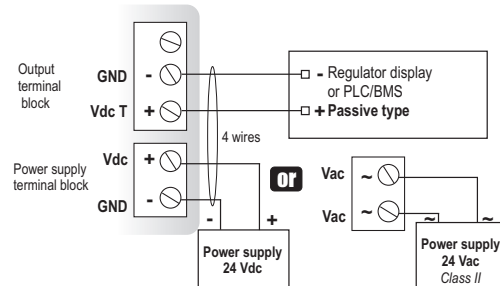

**≡≡≡ 3 wires**

**⚠** To make a 3-wire connection, **before powering up the transmitter**, please connect the output to the input ground. See drawing shown beside.

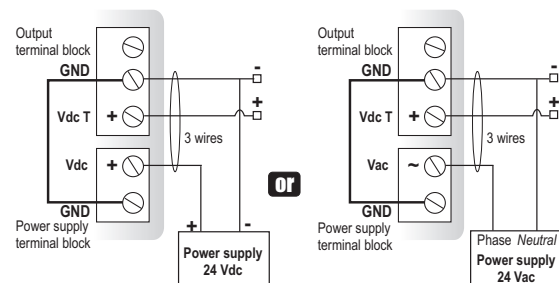


## Electrical connection

For the models

**TM 100 - AOA, TM 100 - ANA, TM 100 - AOE, TM 100 - ANE**

• Output 4-20 mA - **passive**

== 2 wires

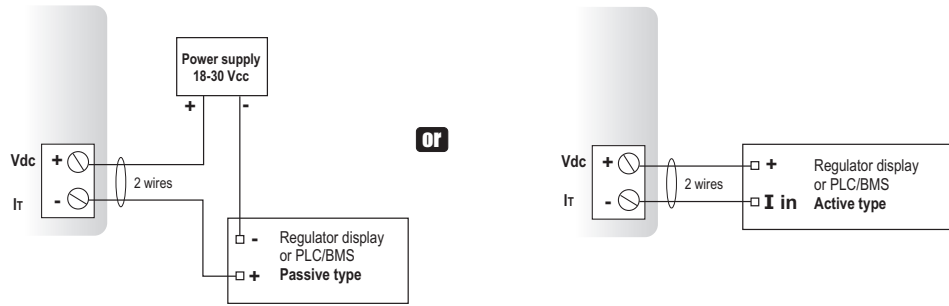


## Configuration


It is possible to configure the measuring ranges, the units, the output of the transmitter (according to the model) either by DIP switch and/or via software (connections ④ / ⑤ and ⑥ on drawing "connection").

### Configuration by DIP switch

To configure the instrument, please unscrew the 2 screws from the housing.

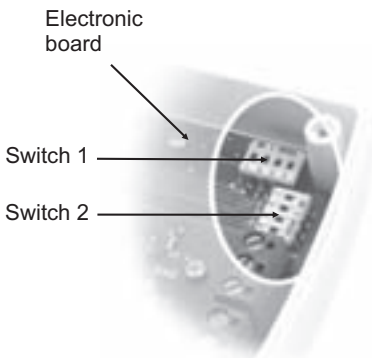

#### Identification of the DIP switch on the electronic board

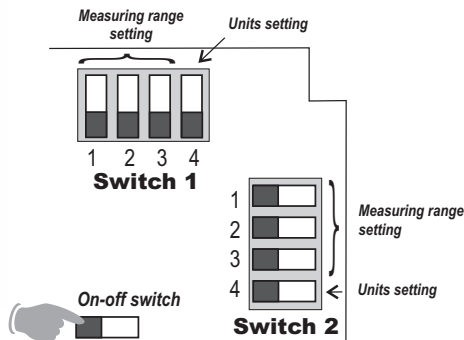

To configure the transmitter, it **must not be energized**. Then, you can make the settings required, with the DIP switches (as shown on the drawing beside). When the transmitter is configured, you can power it up.

#### Caution!

Please follow carefully the combinations beside with the DIP switch.

If the combinations are wrong, the following message will appear on the display of the transmitter "CONF ERROR". In that case, you will have to unplug the transmitter, replace the DIP switches correctly, and then power the transmitter up.

#### Units setting

To set the measuring unit, put the on-off switch 4 of units as shown beside.

Configurations	Switch 1 TM100 AC - Output 4-20mA - Active		Switch 2 TM 100V - Output 0-10V - Active TM 100 A - Output 4-20mA - Passive	
	°C	°F	°C	°F
Combinations	 1 2 3 4	 1 2 3 4	 1 2 3 4	 1 2 3 4

#### Measuring range setting

To set the measuring range, put the on-off switches 1, 2 and 3 of the units, as shown beside.

Configurations	Switch 1 TM100 AC - Output 4-20mA - Active				Switch 2 TM 100V - Output 0-10V - Active TM 100 A - Output 4-20mA - Passive			
	0 to 50°C	-20 to 80°C	-50 to 50°C	0 to 100°C	0 to 50 °C	-20 to 80 °C	-50 to 50 °C	0 to 100 °C
Combinations	 1 2 3 4	 1 2 3 4	 1 2 3 4	 1 2 3 4	 1 2 3 4	 1 2 3 4	 1 2 3 4	 1 2 3 4

■ **Initialization of the transmitter**

When the transmitter is powered up, it initializes and displays the digits  $\boxed{00000}$ , and then its configuration including :

- **The measuring range.**
- **The analog output**

**1- The measuring range.**

The following message is displayed :  $\boxed{Lo}$ . This is the low value of the measuring range, and its digit value : **eg** :  $\boxed{0}$

The following message is displayed :  $\boxed{Hi}$ . This is the high value of the measuring range and its digit value **eg** :  $\boxed{50}$ .

The arrow displayed (at the bottom or on the right of the screen) is relative to the unit of measurement : **eg** : from 0 to 50 °C.

**2 - The analog output.**

If the analog output is in 4-20 mA, then the following message will appear :  $\boxed{4-20A}$ .

If the analog output is 0-10V, then the following message will appear :  $\boxed{0-10V}$ .


After the display of the configuration, the transmitter displays  $\boxed{----}$ , which confirms that the initialization is finished and you can start the measurements.

■ **Configuration via software**

(with optional LCC100 software)



**Switch 1**



**Switch 2**

**An easy and friendly configuration with the software !**

You can configure your own intermediary ranges, the offset....

Example : for a transmitter with a range of 0-100°C, the minimum delta of the range is 20°C. You can also configure your transmitter from 0 to +70°C, or from -10 to +10°C...

- To access the configuration via software, you must first position the **DIP switches** as per the following picture (shown beside), and then connect the cable to the transmitter (see beside and see "Connection").

- Please refer to the user manual of the LCC100 to make the configuration.



**Caution !**


The configuration of the parameters can be done **either by DIP switch, OR via software** (you cannot combine both solutions).



■ **Mounting**

Installation: mount the ABS plate on the wall (this plate is supplied with the transmitter). Drilling :  $\varnothing$  6 mm (with the screws and pins supplied with the transmitter).

Insert the transmitter at 30 ° on the plate (see A on the drawing beside) and rotate its housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed.

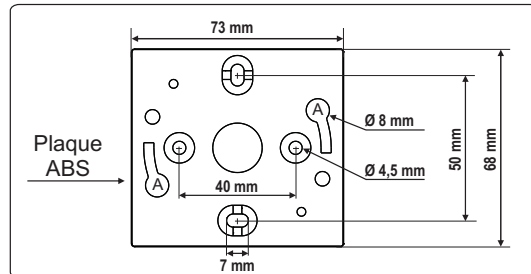

■ **Maintenance**

Please avoid any aggressive solvent.  
Please protect the transmitter and its probes from any cleaning product containing formol, that may be used for cleaning rooms or ducts.

■ **Options**

- Power supply class 2, input 230 Vac, output 24 Vac, ref.KIAL-100A
- Configuration software LCC 100 with RS 232 cable.
- Temperature probes Pt100 3 wires




**New**

CE

## Thermostats TST

- Measuring ranges from 0 to +50°C, -20 to +80°C, -100 to +400°C
- RCR relay output 3A/230Vac. Power supply 24Vac/Vdc
- Visual alarm, red LED in front
- ABS IP 65 and IP 30 housing, with display
- Quick and easy mounting with the "1/4 turn" system with wall-mount plate

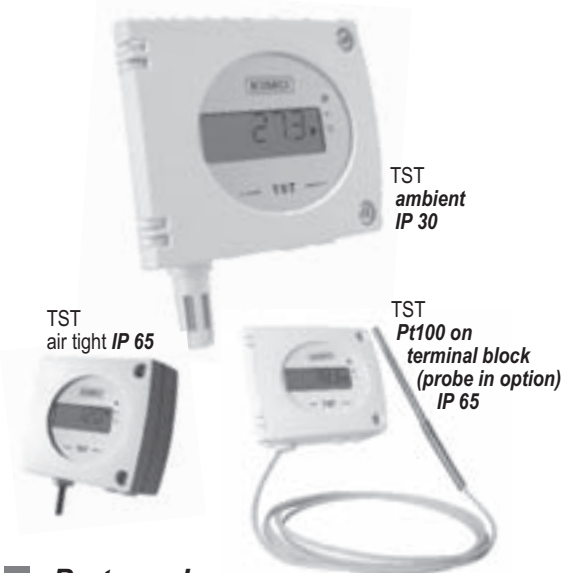




### Part number

To order, just add the code to complete the part number :

Probe	
M	Ambient
E	Air tight
B	Pt100 input, on terminal block

TST - [ ]

Example : TST-B corresponds to a TST thermostat with Pt 100 input on terminal block (probe in option).

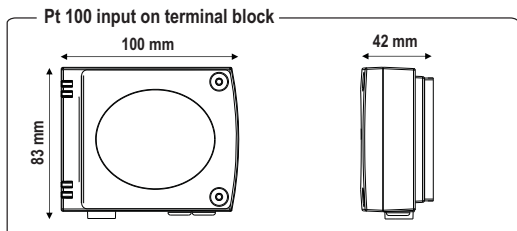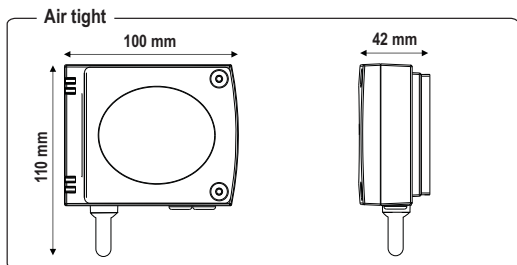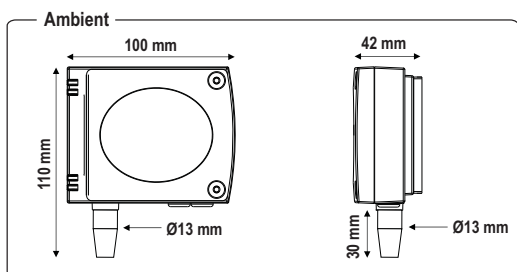

### Features of the transmitter

#### Temperature

A Pt100 is a resistance with a positive temperature coefficient which varies according to the temperature. The higher the temperature is, the more the value of the resistance increases.

Example : for 0°C  $\simeq$  100  $\Omega$  - for 100°C  $\simeq$  138,5  $\Omega$

Measuring ranges ..... 0 to +50°C (ambient model)  
 -20 to +80°C (air tight model)  
 according to the probe : -100 to +400°C  
 (Pt100 input on terminal block)

Unit of measurement ..... °C, °F

Accuracy \* .....  $\pm$ 1% of reading  $\pm$ 0,4°C

Operating time ..... 1/e (63%) 5 sec. (ambient model)  
 1/e (63%) 20 sec. (air tight model)  
 according to probe (Pt100 input on terminal block)

Resolution ..... 0,1°C

Type of transmitter ..... Pt 100 class A as per DIN IEC 751

Type of fluid ..... air and neutral gases

### Features of the housing

Housing ..... ABS

Fire-proof classification ..... HB as per UL94

Dimensions ..... see drawing beside

Protection ..... IP30 (ambient model)  
 IP65 (air tight and Pt100 on terminal block models)

Display ..... 5-digit LCD. Dimensions 50 x 15 mm

Height of the digits ..... 10 mm

Cable grip ..... for cables  $\varnothing$  7 mm max.

Weight ..... 145 g

### Technical specifications

Output ..... 1 RCR relay 3A/230 Vac

Relay and alarm status ..... red LED in front

Set point ..... 1 configurable set point

Power supply ..... 24 Vac/Vdc  $\pm$ 10%

Consumption ..... 2 VA

Electromagnetical compatibility ..... EN 61326

Electrical connection ..... screw terminal block for cable  $\varnothing$  1.5 mm<sup>2</sup> max.

Communication to PC ..... Kimo RS 232 cable

Working temperature ..... +10 to +40°C (ambient model)  
 -10 to +50°C (air tight model)  
 according to probe (Pt100 input on terminal block)

Storage temperature ..... -10 to +70°C


Environment ..... air and neutral gases

\*All the accuracies indicated in this technical datasheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Connection




For models  
**TST-M and TST-E**

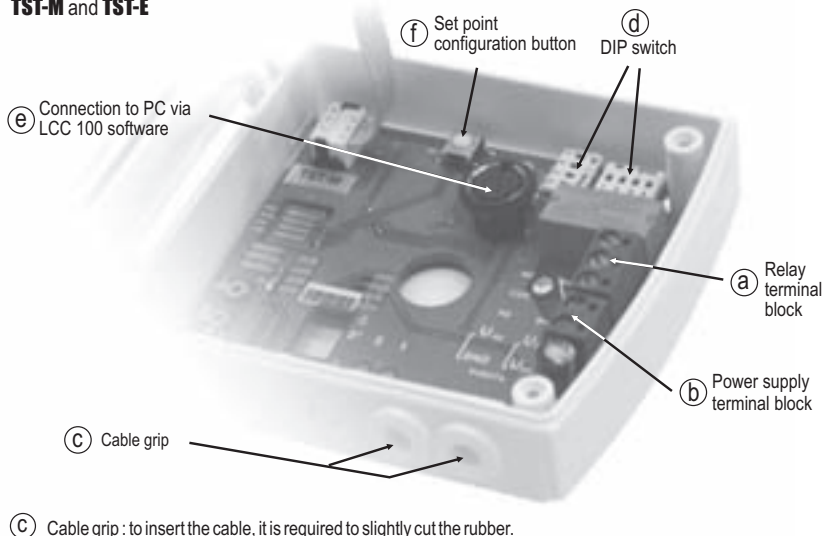

### Relay



### Power supply





**OR**



For model

### TST-B


Pt100 terminal block



## Electrical connections - as per norm NFC15-100


**⚠** This connection must be made by a qualified technician. To make the connection, the transmitter must not be energized.

For models  
**TST-M and TST-E**

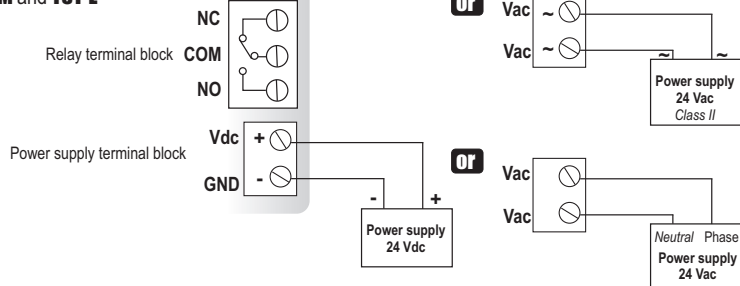

### Connection of the Pt100 probe

For model  
**TST-B**




## Configuration


Configuration of measuring units, set points, can be carried out different ways : **DIP switch, push-button and/or software** (connections (e), (f) and (d) on drawing "connection").

### Configuration of measuring units by **DIP switch**

To configure the transmitter, please unscrew the 2 screws from the housing, and then open it.

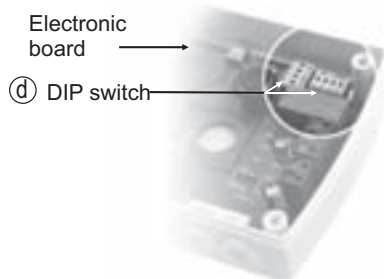

### Identification of the DIP switches on the electronic board



To configure the transmitter, **it must not be energized**. Then, you can make the settings required, thanks to the DIP switches (as shown on the drawing beside). When the transmitter is configured, you can power it up.

### **⚠ Caution !**

Please follow carefully the combinations beside with the **DIP switch**.

If the combination is wrongly done, the following message will appear on the display of the transmitter "**CONF ERROR**". In that case, you will have to unplug the transmitter, replace the DIP switches correctly, and then power the transmitter up.


## • Setting of units

To set the unit of measurement, please put the on-off buttons 3 and 4 of the units as shown beside.

Configurations	°C	°F
1		1
2		2
3		3
4		4

### ■ Set points configuration with the push-button

Power the transmitter up : it will then display its current configuration.  
To modify the configuration, please proceed as follows :  
Remove the 2 screws from the housing and open it.  
The settings are done with the button located on the electronic board (see photo beside).

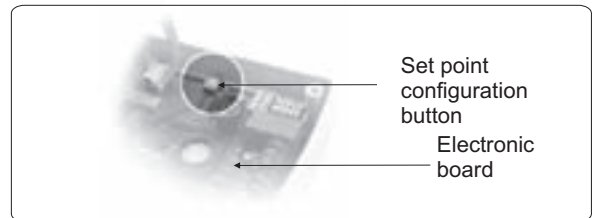

#### Principle :

- By pressing on this button for more than 3 seconds, you can validate the setting and go to the next setting.
- By pressing quickly on this button, you can increment a value and scroll down the different options or values.

#### This button enables :

- 1- to activate/deactivate an alarm (set point)
- 2- to program the action of the alarm (rising/falling/regulation action)
- 3- to set the set point value
- 4- to set the time-delay (temporisation)

To set the different options :

#### 1- Activating/deactivating the alarm :

After pressing the set point configuration button for more than 3 seconds, **CONF.** will be displayed, then **AL.ON** or **AL.OFF** (depending on the last configuration of the transmitter).

Afterwards, by briefly pressing on this button, you can switch between **AL.ON** (alarm on) and **AL.OFF** (alarm off).


To validate your choice, press again for 3 seconds. If you chose **AL.OFF**, then you will exit the configuration mode and switch back to the measurement mode. If you chose **AL.ON**, you will move to the next parameter.

#### 2- Programming the action of the alarm (rising/falling/regulation action) :

**Rising action (1 set point)** : the alarm will activate when the measure **exceeds** the set point and will stop when the measure goes **below** the set point.

**Falling action (1 set point)** : the alarm will activate when the measure goes **below** the set point and will stop when the measure goes **above** the set point.

**Regulation mode (2 set points)** : the set point values will determine the action type. Two possibilities are available:

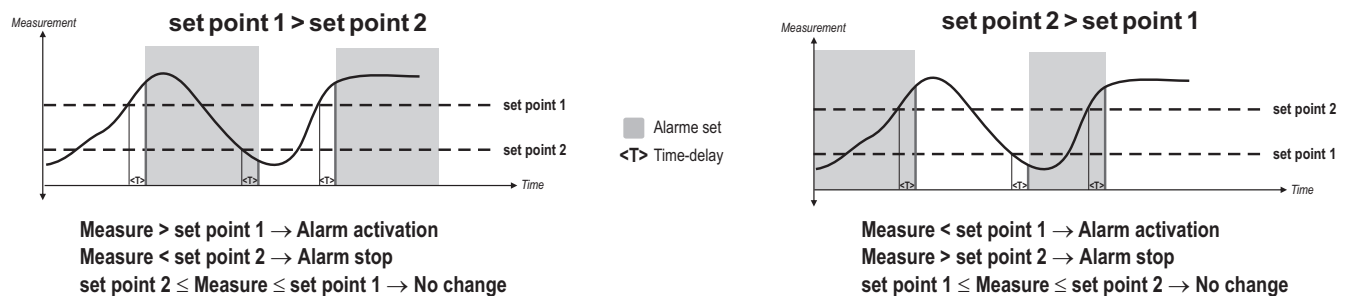

Press the button for 3 seconds to confirm your choice. You will then move on to the last parameter.

#### 3- Programming the set point value :

The set point is a limit which, when being reached and/or exceeded, activates the relay and the visual red LED alarm.

The first digit will start to blink, by briefly pressing on the button, you can choose if the set point will be either positive (0) or negative (-). Then press the button during 3 seconds to confirm your choice. The second digit will start to blink. Press the button briefly to change the value. Then press the button during 3 seconds to confirm your choice. Repeat this sequence until you have reached the last digit and then confirm the set point. If you selected regulation mode , you will program the second set point.

#### 4- Setting of the time-delay (dead band temporisation 60 sec max) :

When the set point is reached and/or exceeded, the time-delay will wait the specified time before energizing the relay, if the set point is still reached and/or exceeded.

When the first digit starts blinking, press briefly on the button to change the value. Then press the button during 3 seconds to confirm your choice. Repeat the process until all digits have the desired value and press the button for 3 seconds to confirm your choice.

The programming is now done and the display switches back to the measurement mode.



## ■ Initialization of the transmitter

When the transmitter is powered up, it initializes and displays the digits  $\boxed{00000}$ , and then its configuration including :

- 1 - the measuring range
- 2 - the status of the alarm
- 3 - action of the alarm (rising, falling or regulation action)
- 4 - the set point
- 5 - time-delay (dead band temporisation)

### 1- The measuring range

The following message is displayed :  $\boxed{Lo}$ . This is the low value of the measuring range, and its digit value : **ex** :  $\boxed{-500}$ .

The following message is displayed :  $\boxed{Hi}$ . This is the high value of the measuring range and its digit value : **ex** :  $\boxed{1000}$ .

The arrow displayed (at the bottom or on the right of the screen) is relative to the unit of measurement : **ex** : from -500 to 1000 Pa.

### 2 - The status of the alarm

When the alarm is off, the following message is displayed :  $\boxed{ALOFF}$ .

When the alarm is on, the following message is displayed :  $\boxed{ALON}$ .

- When the alarm is off, the transmitter displays  $\boxed{-----}$ , which confirms the end of initialization and that you can start the measurements .
- When the alarm is on, the transmitter displays the parameters relative to the relay (set point, program of the alarm, time-delay).

### 3 - Action of the alarm (rising or falling action)

If the relay is programmed in rising action, the following message is displayed :  $\boxed{-r-}$ .

If the relay is programmed in falling action, the following message is displayed :  $\boxed{-l-}$ .

This message is displayed : **ex** :  $\boxed{250}$ , which means that the alarm

If the relay is programmed in regulation mode, the following message is displayed  $\boxed{REG}$ .

## ■ Configuration via software

(with the optional LCC100 software)

### An easy and friendly way to configure!

You can configure the measuring units, the set point, the time-delay...


- To access the configuration via software, you must first position **the DIP switch**, as per the following picture (shown beside), and then connect the cable to the transmitter (see "connections" drawing).

- Please refer to the user manual of the LCC 100 to make the configuration.




### Caution !

The configuration can be made either by switch, or by software (you can not combine both solutions).



## ■ Mounting

Installation : mount the ABS plate on the wall (this plate is supplied with the transmitter). Drilling :  $\varnothing 6$  mm, with the screws and pins supplied with the transmitter. Insert the transmitter into the plate (see points A of the drawing beside), by tilting it at  $30^\circ$ . Rotate the housing in clockwise direction until you hear a "click" which confirms that the transmitter is correctly installed.

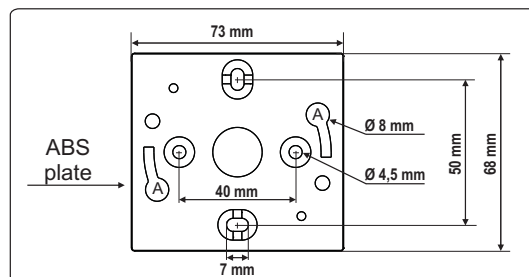


## ■ Maintenance

Please avoid any aggressive solvent.

Please protect the transmitter and its probes from any cleaning product containing formol, that may be used for cleaning rooms or ducts.

## ■ Options

- Power supply class 2, input 230 Vac, output 24 Vac, ref.KIAL-100A
- Configuration software LCC 100 with RS 232 cable
- Temperature probes Pt100 3 wires





**RTD sensor with standard connection head**


**TB 50 / TBD 50**

- Temperature sensor with stainless steel sheath, with or without compression fitting.
- Measuring range **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2, 3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

PT 100

**Part numbers**

To order, just add the codes to complete the part number.

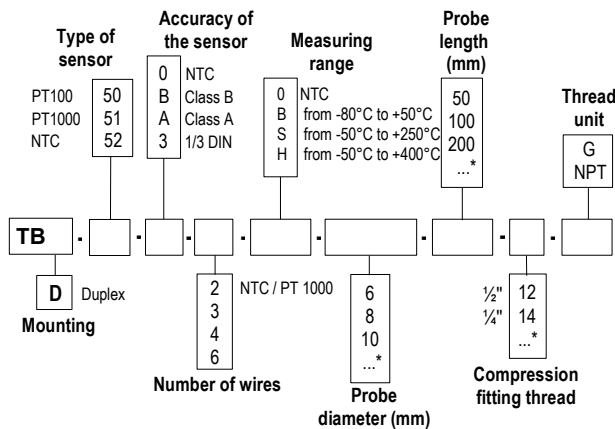


\* Other dimensions on request

**Example : TB-50-B-3-S-6-100-12G.**

**Model :** Temperature sensor PT 100 class B, 3 wires in a sheath of 6 mm diameter and 100 mm length, and with a 1/2" thread plug. Measuring range from -50°C to 250°C.

**Dimensions**

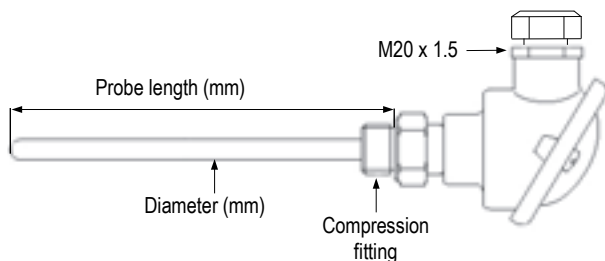

**Technical features**

**Measuring range**.....from -80°C to +400°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)

**Accuracy\***.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table


**Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3.695K ±1%

**Mounting of wires**.....**single pair 2, 3 or 4 wires**  
For T>250°C do not use 4 wires in a sheath of 6 mm Ø.  
**multipair 4 or 6 wires**  
For T>250°C use sheath from 8 mm Ø.

- Storage temperature**.....from -20°C to +80°C
- Sheath**.....316 L stainless steel, 3/4 to 4/4 hard, no welding
- Compression fitting**.....316 L stainless steel
- Thread**.....with or without, 1/4, 1/2, Gaz or NPT plug (other thread on request)
- Electrical connection**.....with or without terminal block transmitter 4/20mA 0/10V as option
- Connection head**.....Aluminium alloy  
cable gland : M20 x 1.5  
IP65 protection
- Adjustable mountings**.....compression fitting welded further along the sheath, flange, clamp, replaceable probe insert, restricted end, ambient end. See datasheet.


## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26


Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2 °C
from +70°C to +100°C	± 0.5 °C

## Accessories (See Datasheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼ " or ½ " Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½ " Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell





-200°C

*RTD sensor with standard head and with resistive element for very low temperature application*


**TBBT 50 / TBBTD 50**

- Temperature sensor with or without compression fitting and stainless steel contact tip.
- Measuring range (According to reference) **from -200 to +80°C**
- Mounting of wires : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).

PT 100

**Part numbers**

To order, just add the codes to complete the part number.

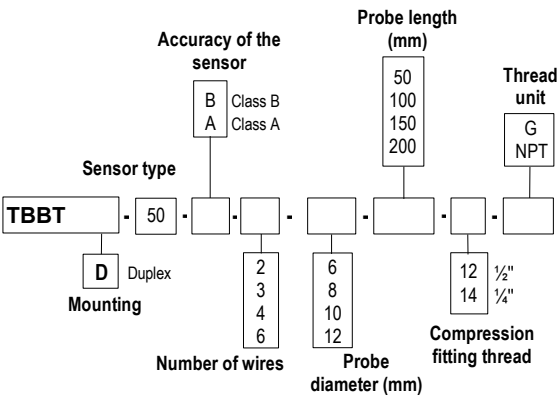

\* Other dimension on request


**Example : TBBT-50-B-3-8-100-12G.**

**Model :** PT 100 temperature sensor class B, 3 wires with 8 mm diameter and length with thread of 100 mm.

With compression fitting 12 1/2' G.

Measuring range from -200°C to +80°C.

**Dimensions probe**

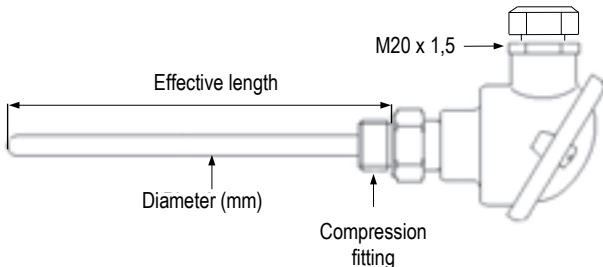

**Technical features**

**Working temperatures**.....from -200°C to +80°C  
(according to reference)

**Accuracy**.....PT100 : see "Tolerances" table

**Sensor type**.....PT100 : Class B, Class A  
as per DIN IEC751

**Mounting of wires**.....single pair 2, 3 or 4 wires  
multipair 4 or 6 wires

**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, no welding, from 3/4 to 4/4 hard

**Compression fitting**.....316 L stainless steel

**Thread**.....with or without, 1/4, 1/2, Gas or NPT plug  
(other thread on request)

**Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option

**Connection head**.....Aluminium alloy  
cable gland : M20 x 1,5  
IP65 protection

**Tolerances\* of PT100 probes**


Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances			
	Class B		Class A	
	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14
-50	0.55	0.22	0.25	0.1
0	0.3	0.12	0.15	0.06
100	0.8	0.3	0.35	0.13
200	1.3	0.48	0.55	0.2
300	1.8	0.64	0.75	0.27
400	2.3	0.79	0.95	0.33

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.


## ■ Useful information on thermometry with platinum resistor PT100.

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of  $RL1 + RL2$ , leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3),  $RL2 + RL3$  allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.


### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## ■ Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






*RTD sensor with standard head and resistive element for very high temperature use*

**TBHT 50 / TBHTD 50**

- Temperature sensor with or without compression fitting and stainless steel contact tip.
- Measuring range (According to reference) : **from -50 to +550°C**
- Mounting of wire : **single pair** (2,3 or 4 wires).  
**multipair** (4 wires).

**Part numbers**

To order, just add the codes to complete the part number.

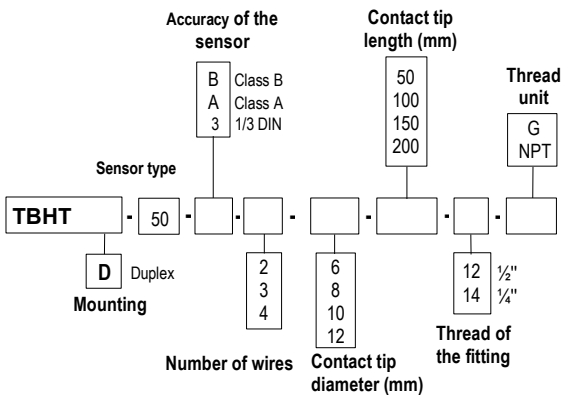


\* Other dimension on request

**Example : TBHT-50-B-3-8-100-12G.**

**Model :** PT 100 temperature probe, class B, 3 wires diameter 8 mm and length including thread 100 mm. With compression fitting 1/2" G. Standard measuring range from -50°C to + 550°C.

**Dimensions**

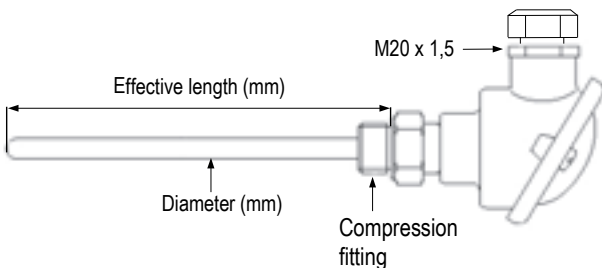

**Technical features**

- Working temperature.....from -50°C to +550°C  
(According to reference)
- Accuracy.....PT100 : see "Tolerances" table
- Type of sensor.....PT100 : Class B, Class A, 1/3 DIN  
As per DIN IEC751
- Mounting of wire.....single pair 2, 3 or 4 wires  
multi pair only 2x2 wires
- Storage temperature.....from -20°C to +80°C
- Contact tip.....316 L stainless steel, no welding, 3/4 to 4/4 hard
- Compression fitting.....316 L stainless steel
- Thread.....with or with out, 1/4, 1/2, male au pas Gas or  
NPT plug (other tread on request)
- Electrical connection.....with or without terminal block  
Transmitter 4/20mA 0/10V as option

**Tolerance of PT100 probes**


Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

PT 100


## Useful information on thermometry with platinum resistor PT100.

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






**RTD sensor with  
miniature connection head**

**TM 50 / TMD 50**

- Temperature sensor with stainless steel sheath, with or without compression fitting.
- Measuring range **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2, 3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**

To order, just add the codes to complete the part number.

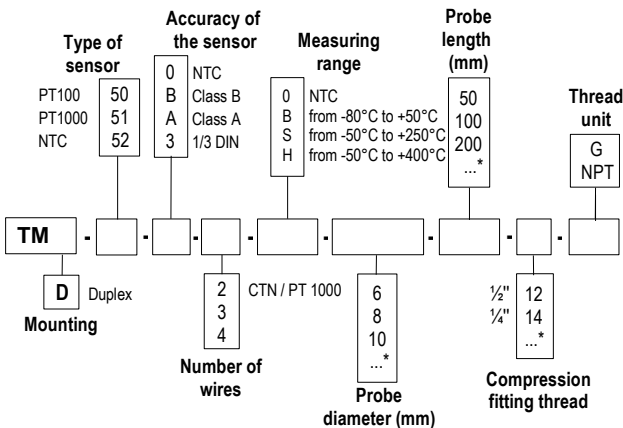


\* Other dimensions on request

**Example : TM-50-B-3-S-6-100-12G.**

**Model :** Temperature sensor PT 100 class B, with 3 wires in a sheath of 6 mm diameter and 100 mm length, and with a 1/2"G thread plug. Measuring range from -50°C to 250°C.

**Dimensions**

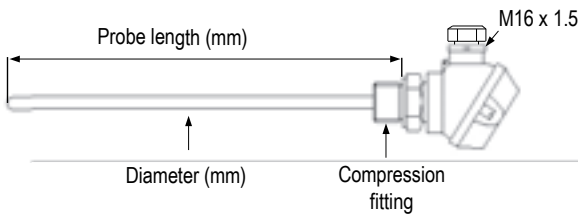

**Technical features**

- Measuring range**.....from -80°C to +400°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)
- Accuracy\***.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance at 25°C,  $R_{25} = 10K\Omega$   
Nominal Beta B25/85 value = 3.695K ±1%

**Mounting of wires**.....**single pair 2, 3 or 4 wires**  
For  $T > 250^\circ C$  do not use 4 wires in a sheath of 6mm Ø.  
**multipair 4 wires only**  
For  $T > 250^\circ C$  use sheath from 8mm Ø.


- Storage temperature**.....from -20°C to +80°C
- Sheath**.....316 L stainless steel, 3/4 to 4/4 hard, no welding
- Compression fitting**.....316 L stainless steel
- Thread**.....with or without, 1/4, 1/2, Gaz or NPT plug (other thread on request)
- Electrical connection**.....with or without terminal block  
transmitter 4/20mA 0/10V as option
- Connection head**.....Aluminium alloy  
cable gland : M16 x 1.5  
IP65 protection
- Adjustable mountings**.....compression fitting welded further along the sheath, flange, clamp, replaceable probe insert, restricted end, ambient end.  
See datasheet.

PT 100




■ **Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .**

• **2-wire connection**




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

• **3-wire connection**



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

• **4-wire connection**



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

■ **Tolerance of PT100 and PT1000 probes.**

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

■ **Tolerances of NTC probes**

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

■ **Accessories (See Datasheet)**

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



Ref. FTang - TM - 03/08 B - We reserve the right to modify the characteristics of our product.

IP 68




**RTD sensor with waterproof connection head**

**TE 50 / TED 50**

- Temperature sensor with stainless steel sheath, with or without compression fitting.
- Measuring range **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2, 3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**


To order, just add the codes to complete the part number.

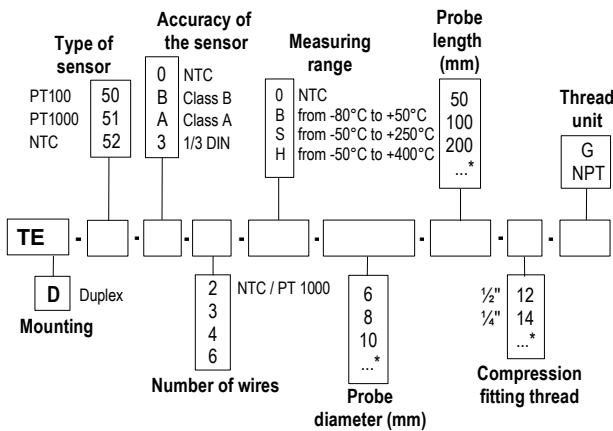

\* Other dimensions on request

**Example : TE-50-B-3-S-6-100-12G.**  
**Model :** Temperature sensor PT 100 class B, with 3 wires in a sheath of 6 mm diameter and 100 mm length, and with a 1/2"G thread plug. Measuring range from -50°C to 250°C.

**Dimensions**

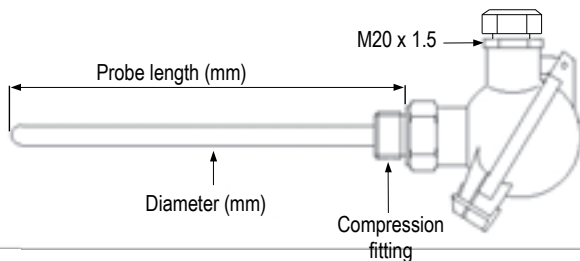


**Technical features**

- Measuring range**.....from -80°C to +400°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)
- Accuracy\***.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance at 25°C,  $R_{25} = 10K\Omega$   
Nominal Beta B25/85 value = 3.695K ±1%
- Mounting of wires**.....**single pair 2, 3 or 4 wires**  
For  $T > 250^\circ C$  do not use 4 wires in a sheath of 6 mm Ø.  
**multipair 4 or 6 wires**  
For  $T > 250^\circ C$  use sheath from 8 mm Ø.
- Storage temperature**.....from -20°C to +80°C
- Sheath**.....316 L stainless steel, 3/4 to 4/4 hard, no welding
- Compression fitting**.....316 L stainless steel
- Thread**.....with or without, 1/4, 1/2, Gaz or NPT plug (other thread on request)
- Electrical connection**.....with or without terminal block  
transmitter 4/20mA 0/10V as option
- Connection head**.....Aluminium alloy  
cable gland : M20 x 1.5  
IP68 protection
- Adjustable mountings**.....compression fitting welded further along the sheath, flange, clamp, replaceable probe insert, restricted end, ambient end. See datasheet.

PT 100


■ **Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .**

• **2-wire connection**




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

• **3-wire connection**



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

• **4-wire connection**



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

■ **Tolerance of PT100 and PT1000 probes.**

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26


Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

■ **Tolerances of NTC probes**

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

■ **Accessories (See Datasheet)**

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



Ref. FTang - TE50 - 03/08 B - We reserve the right to modify the characteristics of our product.



**RTD sensor with  
noryl connection head  
for chemical or food industry**




**TP 50 / TPD 50**

- Temperature sensor with stainless steel sheath, with or without compression fitting.
- Measuring range **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2, 3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

PT 100

**Part numbers**

To order, just add the codes to complete the part number.

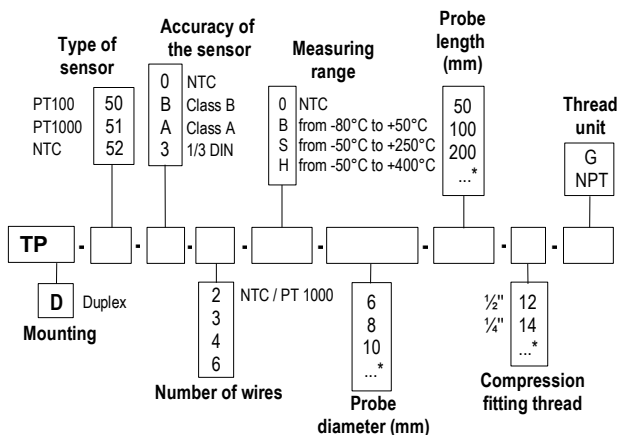


\* Other dimensions on request

**Example : TP-50-B-3-S-6-100-12G.**

**Model :** Temperature sensor PT 100 class B, with 3 wires in a sheath of 6 mm diameter and 100 mm length, and with a 1/2"G thread plug. Measuring range from -50°C to 250°C.

**Dimensions**

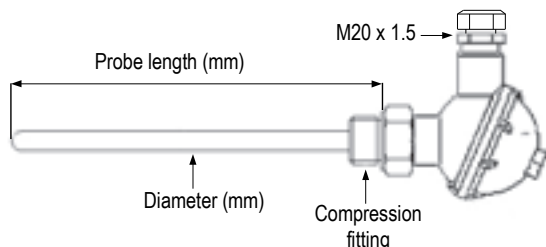


**Technical features**

- Measuring range**.....from -80°C to +400°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)
- Accuracy\***.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3.695K ±1%
- Mounting of wires**.....**single pair 2, 3 or 4 wires**  
*For T>250°C do not use 4 wires in a sheath of 6 mm Ø.*  
**multipair 4 or 6 wires**  
*For T>250°C use sheath from 8 mm Ø.*
- Storage temperature**.....from -20°C to +80°C
- Sheath**.....316 L stainless steel, 3/4 to 4/4 hard,  
no welding
- Compression fitting**.....316 L stainless steel
- Thread**.....with or without, 1/4, 1/2, Gaz or NPT plug  
(other thread on request)
- Electrical connection**.....with or without terminal block  
transmitter 4/20mA 0/10V as option
- Connection head**.....Noryl resin  
cable gland : M20 x 1.5  
IP65 protection
- Adjustable mountings**.....compression fitting welded further along the  
sheath, flange, clamp, replaceable probe  
insert, restricted end, ambient end.  
See datasheet.




■ **Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .**

• **2-wire connection**




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

• **3-wire connection**



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 22' terminals. This is the most common connection.

• **4-wire connection**



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

■ **Tolerance of PT100 and PT1000 probes.**

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

■ **Tolerances of NTC probes**

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2°C
from +70°C to +100°C	± 0.5°C

■ **Accessories (See Datasheet)**

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



Ref. FTang - TP50 - 03/08 B - We reserve the right to modify the characteristics of our products without notice.




**RTD sensor  
with DIN 43650 head and  
resistive element  
THIR 50 / THIRD 50**

- Temperature sensor with or without compression fitting and stainless steel contact tip.
- Measuring range (According to references) **from -80°C to +400°C** (PT100 and PT1000)  
**from -20°C to +120°C** (NTC)
- Mounting of wire : **single pair** (2,3 or 4 wires).  
**multipair** (2x2 wires only).
- For other type of resistance PT25, PT50, PT500, PT200 or NI, please contact us.

PT 100

**Part numbers**

To order, just add the codes to complete the part number.

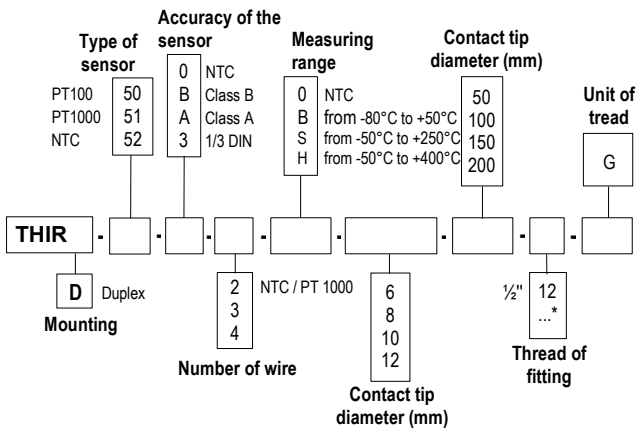


\* Other dimensions on request

**Example : THIR-50-B-3-S-6-100-12G.**

**Model :** PT 100 temperature sensor, class B, 3 wires with 6 mm diameter and length including thread of 100 mm.  
With 1/2" G compression fitting.  
**Standard measuring range from -50°C to 250°C.**

**Dimensions**

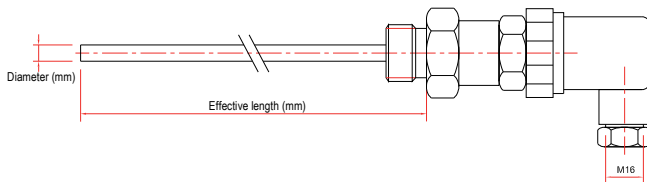

**Technical features**

**Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
(According to reference) from -20°C to +120°C (NTC)

**Accuracy**.....**PT100 or PT1000** : See "Tolerances" table  
**NTC** : See "Tolerances" table

**Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance à 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%

**Mounting of wire**.....**single pair 2, 3 or 4 wires**  
For T>250°C do not use 4 wires in a sheath of 6mm Ø.  
**multipair 4 wires only**  
For T>250°C use sheath from 8 mm Ø.

**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, no welding, 3/4 to 4/4 hard

**Compression fitting**.....stainless steel 316 L

**Thread**.....with or without, 1/2" G in standard  
other on request


**Electrical connection**.....Attached tinned brass eyelet on flange

**Connection head**.....rectangular in glass fibre reinforced plastic  
cable gland : P G11 or M16  
IP65 protection (with seal)  
working temperature : from -40°C to +125°C

**Adjustable mountings**.....on request


## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 1' and 2' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) et DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼ " or ½ " Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell





Plug-in head

**RTD sensor** CE  
**with plug-in connection head and at resistive element**


**TM 12 50 / TM 12 D 50**

- Temperature sensor with or without compression fitting et stainless steel contact tip.
- Measuring range (according to reference) : **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC)
- Mounting of wires : **simple** (2, 3 or 4 wires).  
**multipair** (4, 6 or 8 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**

To order, just add the codes to complete part number.

**TM 12**

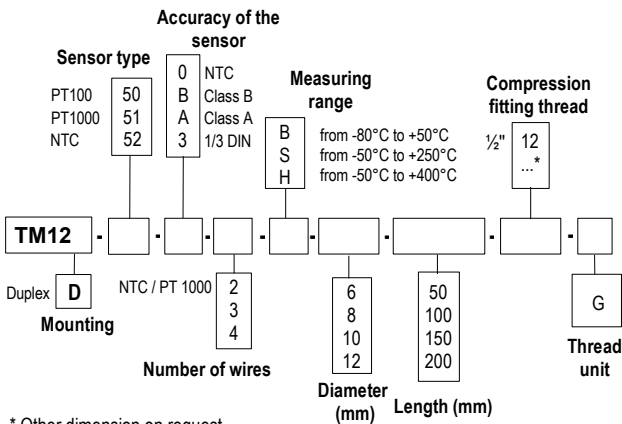


\* Other dimension on request

**Example : TM12-50-B-3-S-100-12G.**

**Model :** PT 100 temperature sensor class B, 3 wires with 8 mm diameter and length with thread of 100 mm. With compression fitting 1/2" G. Measuring range **from -50°C to 250°C.**

**TM 12 D**

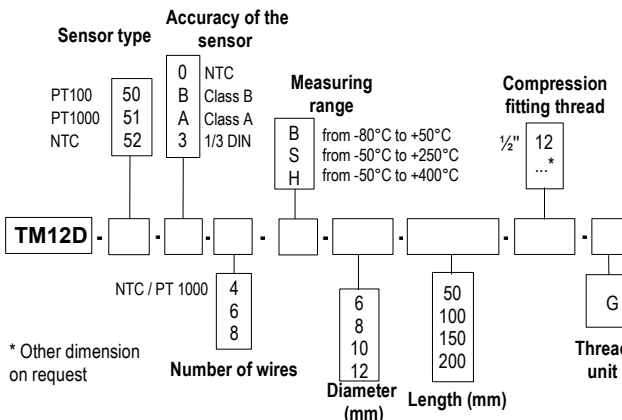

\* Other dimension on request

**Example : TM12D-50-B-6-S-8-100-12G.**

**Model :** PT 100 temperature sensor class B, multipair mounting, 6 wires with 8 mm diameter and length with thread of 100 mm. With compression fitting 1/2" G. Measuring range **from -50°C to 250°C.**

**Technical features**

**Operating temperatures**.....from -80°C to +400°C (PT100 and PT1000)  
(according to reference) from -20°C to +120°C (NTC)

**Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table

**Sensor type**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC 751  
NTC: resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta value B25/85 = 3,695K ±1%

**Mounting of wire**.....**single pair 2, 3 or 4 wires**  
For T>250°C do not use 4 wires in a sheath of 6mm Ø.  
**multipair 4, 6 or 8 wires**  
8 wires mounting from 8 mm.



**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, without welding, from 3/4 to 4/4 hard  
Other on request

**Compression fitting**.....316 L stainless steel


**Thread**.....with or without, 1/2" G in standard  
Other on request

**Electrical connection**.....shielded PVC cord of 2 metres  
knurled head screw  
Protection : IP 67 only for a screwed state  
Contact : nicked CuZn with gilding of 0.8 µm

**Adjustable mountings**.....flange, offset fitting, perforated, etc...




## Dimensions

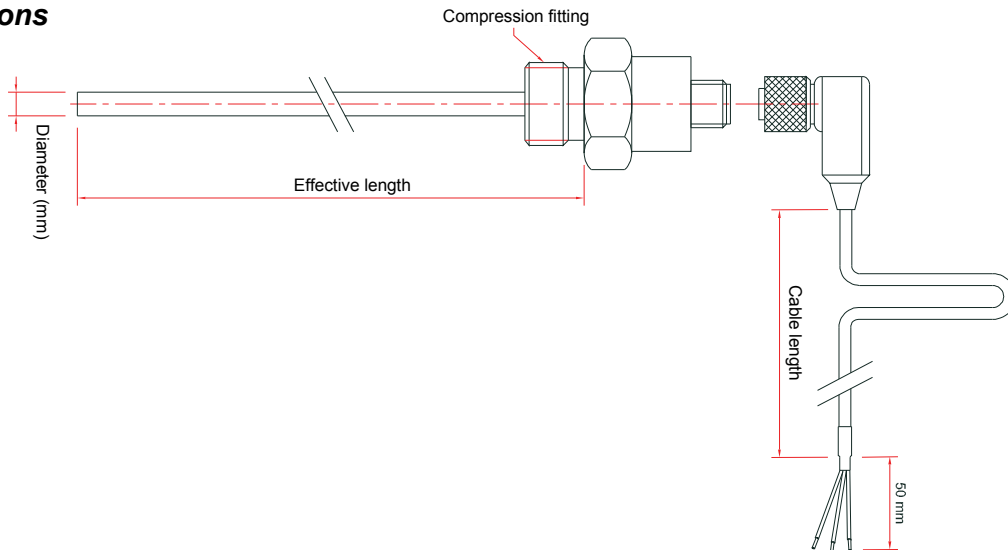


## Useful information on thermometry with platinum resistor PT100.

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 1' and 2' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Tolerance\* of PT100 and PT1000 probes.


Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω


## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼ " or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



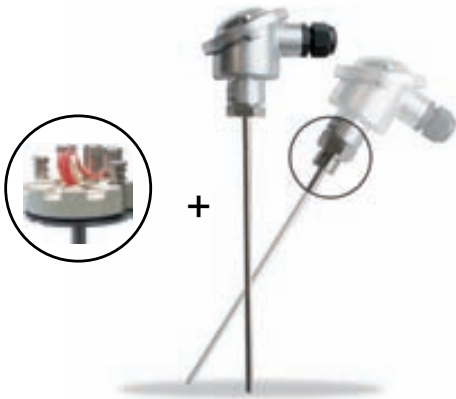


**RTD sensor with standard head  
and with resistive element  
with interchangeable mountings**

**TBEI 50 – TBEID 50**

- Temperature sensor with or without compression fitting and stainless steel contact tip.
- Measuring range (According to reference) **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wire : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**

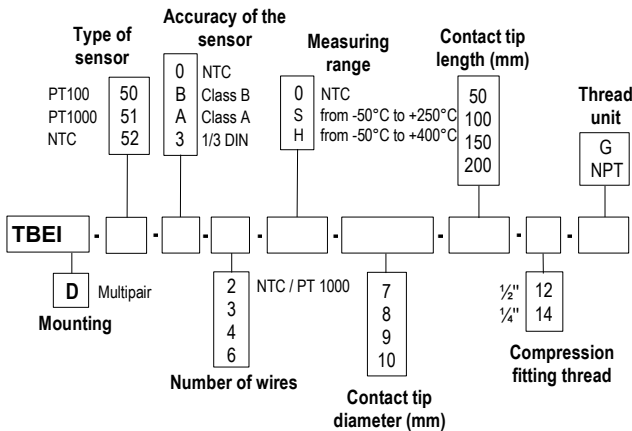

\* Other dimensions on request


**Example : TBEI-50-B-3-S-7-100-12G.**

**Model :** PT 100 temperature sensor class B, with 3 wires in a sheath of 7 mm diameter and 100 mm length (including thread), with a 1/2 "G thread plug and with interchangeable element of 4 mm Ø and 140 mm length.


Standard measuring range from -50°C to 250°C.

**Dimensions**

- Schema of the sensor

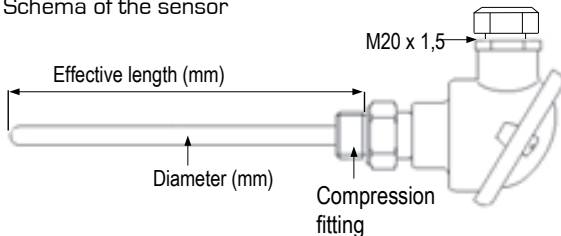

- Internal interchangeable element schema

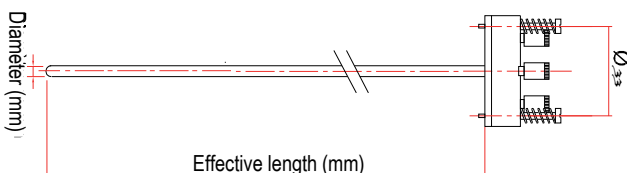


**Technical features**

**Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
(According to reference) from -20°C to +120°C (NTC)

**Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table

**Type of sensor**.....**PT100 or PT1000** : Class B, Class A, 1/3 DIN as per DIN IEC751  
**CTN** : resistance à 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%

**Mounting of wire**.....**single pair 2, 3 or 4 wires**  
For T>250°C do not use 4 wires in a sheath of 6mm Ø.  
**multipair 4 or 6 wires**  
For T>250°C use sheath from 8 mm Ø.



**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, no welding, 3/4 to 4/4 hard

**Interchangeable element**.....316 L stainless steel  
**Diameter** : according to contact tip outer diameter

Interchangeable element Ø	Contact tip minimum Ø
4 mm	7 mm
5 mm	8 mm
6 mm	9 mm
7 mm	10 mm

**LU length** : contact tip length + 40 mm

**Compression fitting**.....316 L stainless steel

**Thread**.....with or with out, 1/4, 1/2, male au pas Gas or NPT plug (other tread on request)

**Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option

**Connection head**.....Aluminium alloy  
cable gland : M20 x 1,5  
IP65 protection

**Adjustable mountings**.....compression fitting welded further along the sheath, flange, clamp, replacable probe insert, restricted end, ambient end.  
See data sheet.




## Interchangeable element at resistive element

### EI 50 – EID 50

- Measuring range (according to reference) **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wire : **simple** (2,3 or 4 wires).  
**duplex** (4 or 6 wires).
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

#### Part numbers

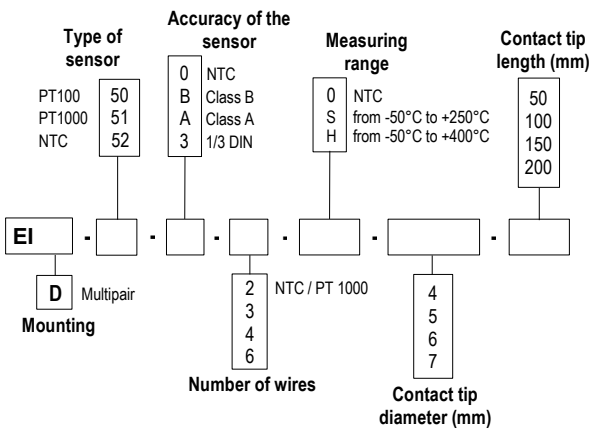


\* Other dimension on request

**Length LU** : contact tip length + 40 mm

**Example** : EI-50-B-3-S-7-100.

**Model** : Interchangeable element PT 100 class B, 3 wires diameter 7mm and thread length included of 100 mm.  
Standard measuring range from -50°C to 250°C.

#### Dimensions

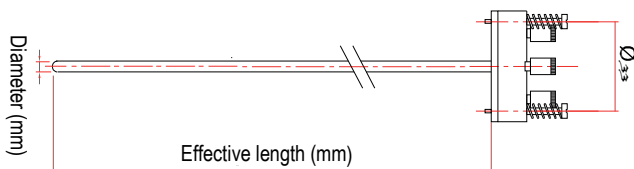

#### Technical features

**Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
**(According to reference)** from -20°C to +120°C (NTC)

**Exactitudes**.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table

**Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
NTC : resistance at 25°C,  $R_{25} = 10K\Omega$   
Nominal Beta B25/85 value = 3,695K ±1%

**Mounting of wire**.....**single pair 2, 3 or 4 wires**  
For  $T > 250^\circ C$  do not use 4 wires in a sheath of 6mm Ø.  
**multipair 4 or 6 wires**  
For  $T > 250^\circ C$  use sheath from 8 mm Ø.



**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, no welding, 3/4 to 4/4 hard


**Interchangeable element**.....316 L stainless steel  
**Diameter** : according to contact tip outer diameter

Interchangeable element Ø	Contact tip minimum Ø
4 mm	7 mm
5 mm	8 mm
6 mm	9 mm
7 mm	10 mm

**LU Length** : contact tip length + 40 mm  
**Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option  
with or without terminal block put on DIN 42 mm Ø kit  
Pitch 33 mm.


## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) et DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings
- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell







**RTD sensor with standard head, resistive element and offset fitting**


**TBRD 50 / TBRDD 50**

- Temperature sensor with stainless steel contact tip and offset compression fitting.
- Measuring range (According to reference) **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wire : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

PT 100

**Part numbers**

To order, just add the codes to complete the part number.

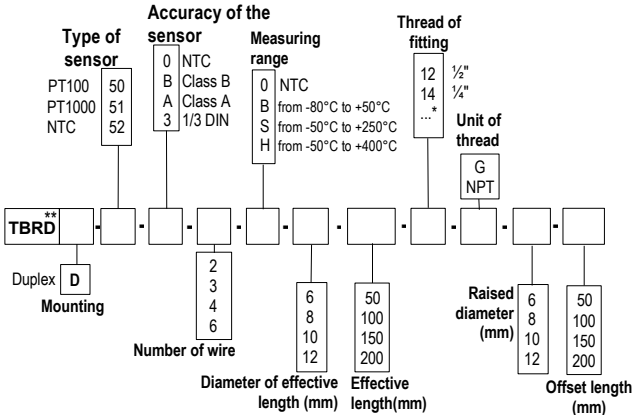


\* Other dimension on request  
\*\* Other head on request

**Example : TBRD-50-B-3-S-6-100-12-G-6-50.**

**Model :** PT 100 temperature sensor, class B, 3 wires mounted on contact tip an effective length of 100 mm and 6 mm Ø and with a raised length of 50 mm and 6 mm Ø. Contact tip with 1/2" gas fitting.  
**Standard measuring range from -50°C to 250°C.**

**Dimensions**

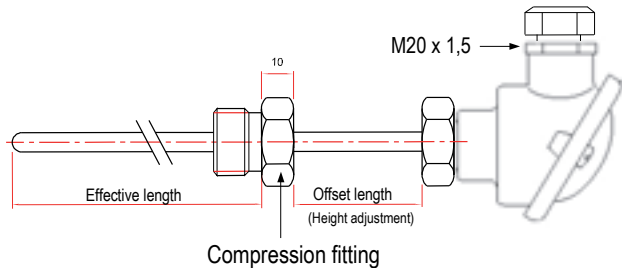


**Technical features**

- Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
(According to reference) from -20°C and +120°C (NTC)
- Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance à 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%
- Mounting of wire**.....**single pair 2, 3 or 4 wires**  
*For T>250°C do not use 4 wires in a sheath of 6mm Ø.*  
**multipair 4 or 6 wires**  
*For T>250°C use sheath from 8 mm Ø.*
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....316 L stainless steel, no welding, 3/4 to 4/4 hard
- Compression fitting**.....stainless steel 316 L
- Thread**.....1/4, 1/2, male Gas or NPT plug  
(other tread on request)
- Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option
- Connection head**.....Aluminium alloy  
cable gland : M20 x 1,5  
IP65 protection
- Adjustable mountings**.....interchangeable element




## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) et DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼ " or ½ " Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½ " Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






**RTD sensor with standard connection head and ambient tip**

**TBAJ 50 / TBAJD 50**

- Temperature sensor with stainless steel sheath and ambient end, with or without compression fitting.
- Measuring range (according to model) from **0°C to +250°C** (PT100 and PT1000).
- Wire mounting: **singlepair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**

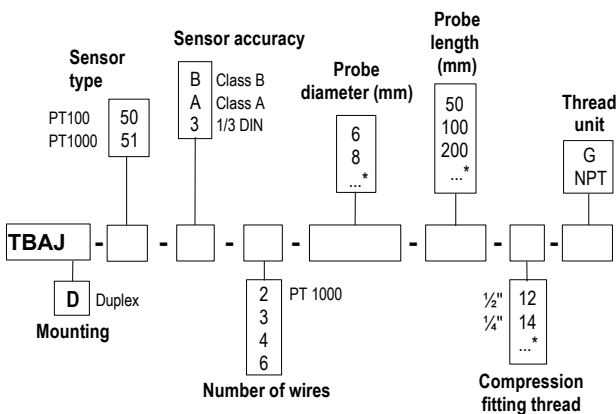

\* Other dimensions available on request

**Example : TBAJ50-B-3-6-100-12G.**


**Model :** Pt 100 temperature sensor, Class B, 3 wires in a sheath of 6 mm diameter and 100 mm length, and with a 1/2" thread plug.

**Measuring range from -50°C to 250°C.**

**Transmitter features**

- Operating temperature**.....from 0°C to +250°C (PT100 and PT1000)
- Accuracy**.....**PT100 or PT1000** : see table "Tolerances"
- Sensor type**.....**PT100 or PT1000** : Class B, Class A, 1/3 DIN as per DIN IEC751
- Wire mounting**.....single pair 2, 3 or 4 wires  
multipair 4 or 6 wires
- Storage temperature**.....from 0°C to +80°C
- Sheath**.....316 L stainless steel, no welding, 3/4 to 4/4 hard. Ambient tip of 20 mm.  
6 or 8 mm Ø or other on request
- Electrical connection**.....with or without terminal block transmitter 4/20mA 0/10V as option
- Connection head**.....Aluminium alloy  
cable gland : M20 x 1.5  
IP65 protection
- Adjustable mountings**.....compression fitting welded further along the sheath, flange, clamp, interchangeable probe system, restricted tip, ambient tip. See datasheet.


**Dimensions**

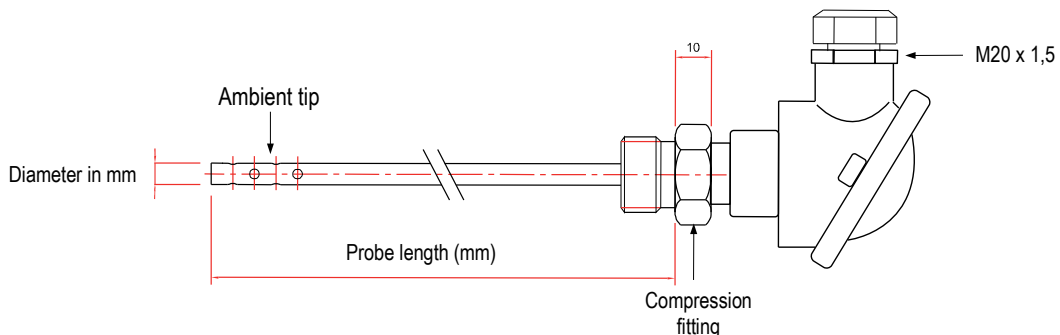




## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 1' and 2' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Accessories (See Datasheet)

- Transmitter output 4/20 mA or 0/10V
- Wall mounting support
- Stainless steel mounting brackets
- ¼ " or ½ " Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel junction fitting
- ½ " Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell





**Bent RTD sensor with standard head and at resistive element with or without fitting**

## Type TBC 50 et TBCR 50

**TBC 50 – TBCD 50 - TBCR 50 – TBCRD 50**

### ■ Probe features

- Temperature sensor with bent stainless steel contact tip with or without fitting.
- Measuring range (according to reference) **from -80°C to +400°C** (PT100 et PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.


### ■ Transmitter features

**Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
(according to reference) from -20°C to +120°C (NTC)

**Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table

**Type of sensor**.....**PT100 or PT1000** : Class B, Class A 1/3 DIN as per DIN IEC751  
CTN : resistance at 25°C,  $R_{25} = 10K\Omega$ , Nominal Beta B25/85 value = 3,695K ±1%

**Mounting of wires**.....**single pair 2, 3 or 4 wires**  
For  $T > 250^\circ C$  do not use 4 wires in a sheath of 6 mm  $\varnothing$   
**multipair 4 or 6 wires**  
For  $T > 250^\circ C$  use sheath from 8mm.



**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, no welding, 3/4 to 4/4 hard. 90° bent.

**Compression fitting**.....316 L stainless steel  
**Smooth mounting without fitting** : do anything  
**Mounting with fitting on L2 (See schema)** : 12 or 14 corresponding to 1/2"G et 1/4"G fittings.  
**Mounting with fitting on L1 (See schema)** : 12L1 or 14L1 corresponding to 1/2"G et 1/4"G fittings.



No 4 wires mounting for contact tip 4mm  $\varnothing$ .

**Thread**.....1/4, 1/2, male Gas or NPT plug (other thread on request)

**Electrical connection**.....with or without terminal block, 4/20mA 0/10V transmitter as option

**Connection head**.....Aluminium alloy, cable gland : M20 x 1,5, IP65 protection

**Adjustable mounting**.....See catalogue or data sheet of related mountings.

PT 100


# TBC 50

Stainless steel bent sensor  
with or without multipair mounting




## Dimensions probe

L1 mini : to determine according to Ø  
L2 mini : to determine according to Ø  
Bending radius : 15 mm Ø 6 mm  
24 mm Ø 8 and 10 mm

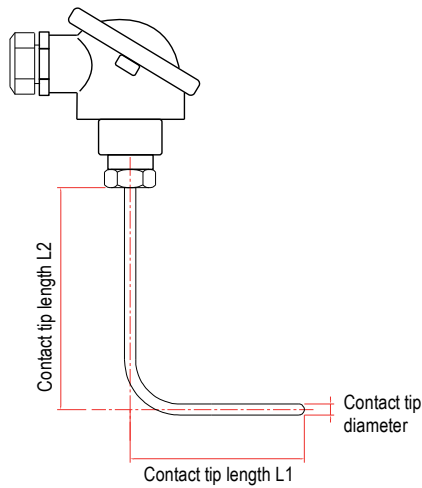

## Part numbers

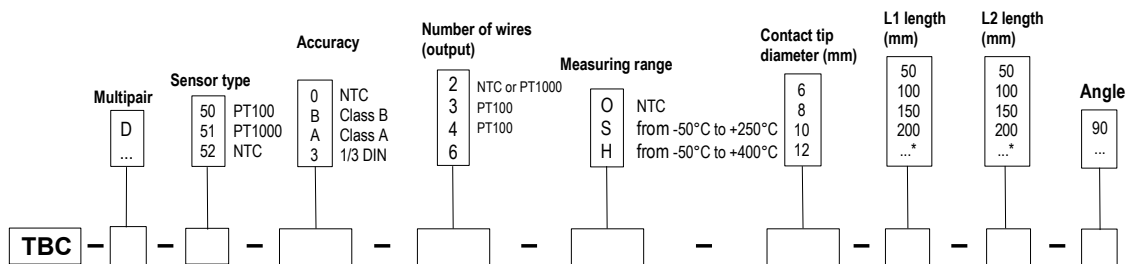

\* Other dimension on request

Example : TBC-51-B-2-S-8-100-100-90


Model : PT1000 temperature sensor Class B, 2 wires, stainless steel contact tip 8 mm Ø bent at 90° and lengths L1 and L2 of 100 mm.

Measuring range from -50 to +250°C.




## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼ " or ½ " Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½ " Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



*RTD sensor with head  
for contact duct*



Supplied with clip for DN 100 duct

**TBCT 50 / TBCTD 50  
TMCT 50 / TMCTD 50**

PT 100

■ **Probe features**

- Temperature sensor with base for all diameters ducts
- Measuring range (according to reference)
  - from **-50°C to +400°C** (PT100 et PT1000).
  - from **-20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

■ **Transmitter features**

**Working temperature**.....*for mounting TBCT type*  
(according to reference) from -50°C to +400°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)  
*for mounting TMCT type*  
from -50°C to +250°C (PT100 and PT1000)  
from -20°C to +120°C (NTC)

**Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table

**Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%

**Mounting of wires**.....*for mounting TBCT type*  
single pair 2, 3 or 4 wires  
or multipair 4 or 6 wires  
No 6 wires for H mounting (+400°C)  
*for mounting TMCT type*  
single pair 2, 3 wires  
or multipair 4 wires only



**Storage temperature**..... from -20°C to +80°C

**Height of clearance**..... 45 mm

**Duct base**..... 40 x 16 x 8,5 mm

V-section  
Fixing by needle screw  
AU4G material (aluminium)

**Fitting**..... supplied with stainless steel clip for DN 100  
other clip on request


**Electrical connection**..... with or without terminal block  
4/20 mA transmitter as option

**Connection head**..... Aluminium alloy  
cable gland : M20 x 1,5  
IP65 protection

# TBCT 50 & TBCTD 50


Temperature sensor with standard head and with contact for duct

## Probe dimensions

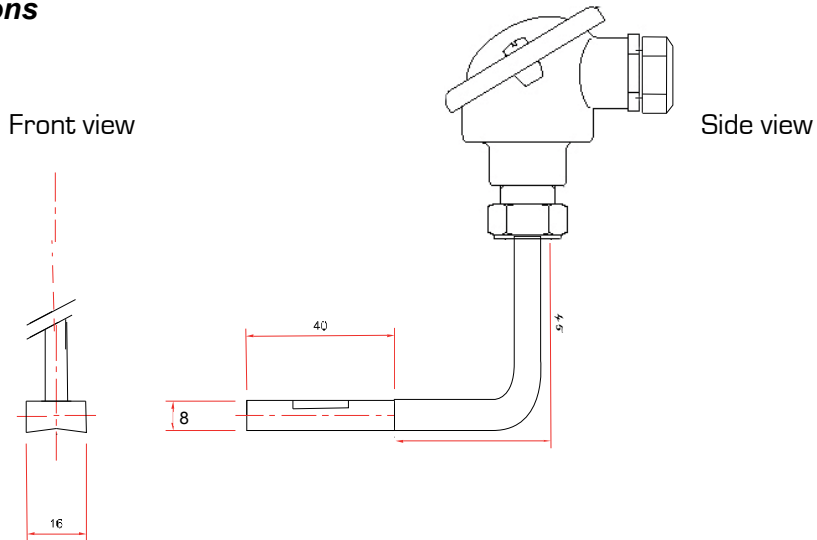

## Références

### • Single pair sensor – Ref. TBCT 50

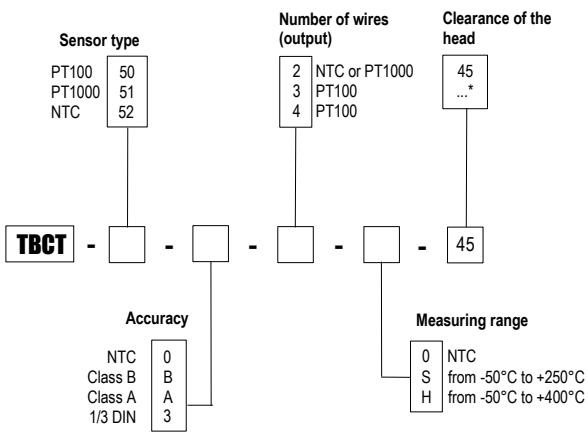


\* Other on request

Example : TBCT51-B-2-S-45

Model : PT1000 temperature sensor Class B, 2 wires, clearance of the head at 45°. Measuring range from -50 à +250°C.

### • Multipair sensor – Ref. TBCTD 50

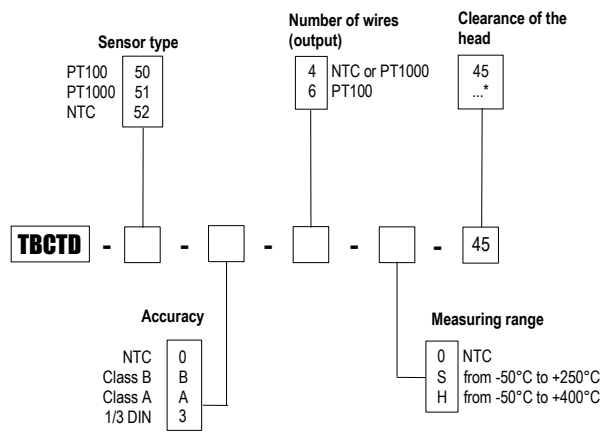

\* Other on request


Example : TBCTD51-B-4-S-45

Model : PT1000 temperature sensor Class B, 4 wires, clearance of the head at 45°. Measuring range from -50 à +250°C.

# TMCT 50 & TMCTD 50


Temperature sensor with miniature head and with contact for duct

## ■ Dimensions probe

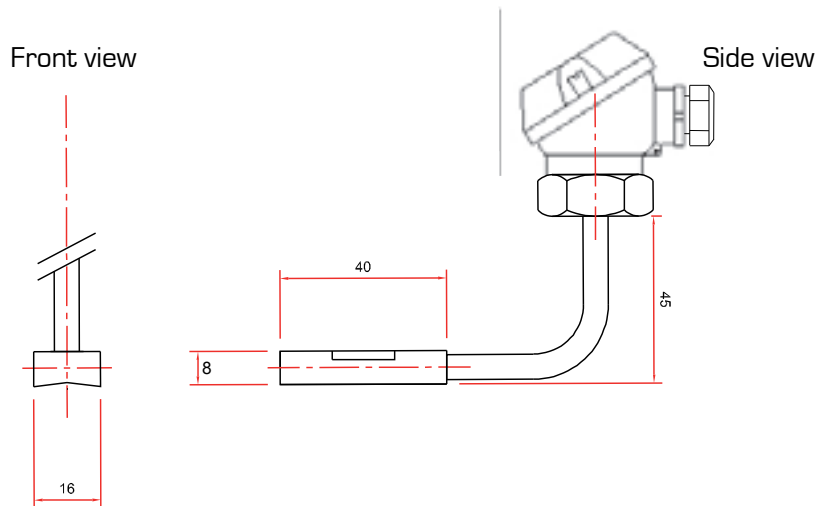

## ■ Part numbers

### • Single pair sensor – Ref. **TMCT 50**

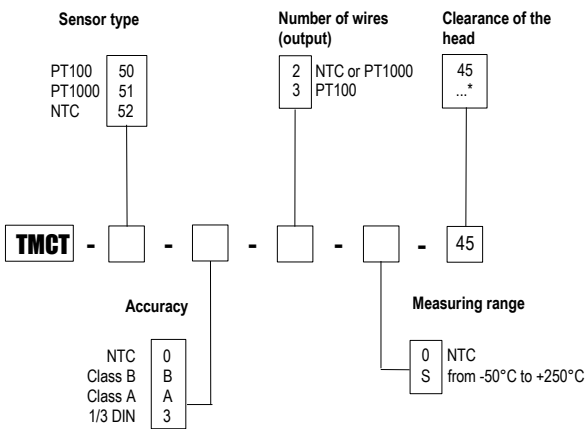


\* Other on request

Example : **TMCT51-B-2-S-45**

Model : PT1000 temperature sensor Class B, 2 wires, clearance of the head at 45°. Measuring range from -50 à +250°C.

### • Multipair sensor – Ref. **TMCTD 50**

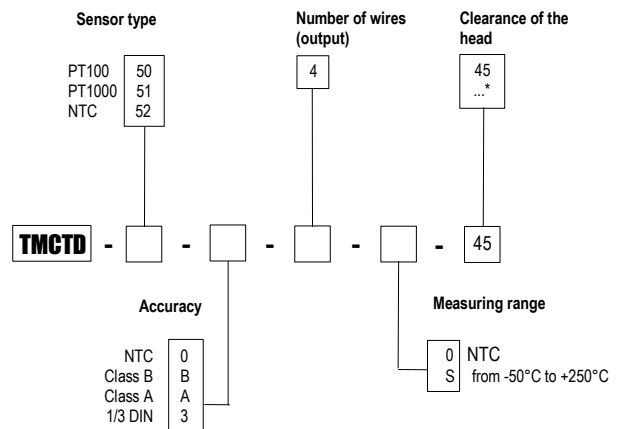

\* Other on request

Example : **TMCTD51-B-4-S-45**

Model : PT1000 temperature sensor Class B, 4 wires, clearance of the head at 45°. Measuring range from -50 à +250°C.

PT 100



## ■ Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0,8	0,32	0,35	0,14	0,27	0,11
-50	0,55	0,22	0,25	0,1	0,19	0,08
0	0,3	0,12	0,15	0,06	0,1	0,04
100	0,8	0,3	0,35	0,13	0,27	0,1
200	1,3	0,48	0,55	0,2	0,44	0,16
300	1,8	0,64	0,75	0,27	0,6	0,21
400	2,3	0,79	0,95	0,33	0,77	0,26

\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## ■ Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## ■ Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting brackets
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings
- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






**RTD sensor with standard head, with resistive element and mounting flange**

**TBB 50 / TBBD 50**

- Temperature sensor with stainless steel contact tip and mounting flange.
- Measuring range (according to reference) **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wires : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor types PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**


To order, just add the codes to complete the part number.

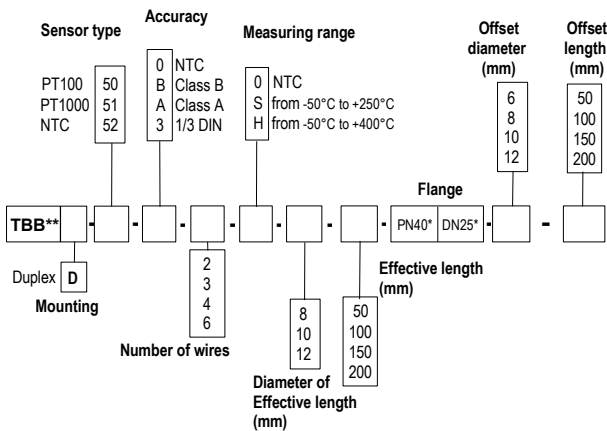

\* Other dimension on request  
\*\* Other head on request

**Example :** TBB-50-B-3-S-8-100-PN40DN25-8-50.  
**Model :** PT 100 temperature probe, class B, 3 wires mounted on contact tip with an effective length of 100 mm and 8 mm Ø and with an offset length of 50 mm and 8 mm Ø. Mounting flange type PN40 DN25.  
**Measuring range from -50°C to 250°C.**

**Probe dimensions**

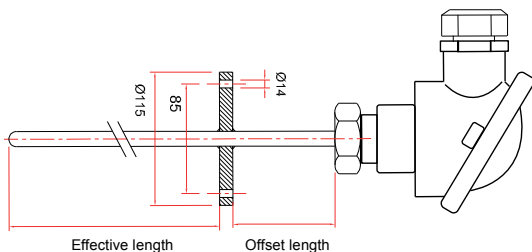


**Technical features**

- Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
(according to reference) from -20°C to +120°C (NTC)
- Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table
- Sensor type**.....**PT100 or PT1000** : Class B, Class A  
1/3 DIN as per DIN IEC751  
NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%
- Mounting of wires**.....**single pair 2, 3 or 4 wires**  
For T>250°C do not use 4 wires in 6mm Ø.  
**multipair 4 or 6 wires**  
For T>250°C use sheath from 8 mm.
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....316 L stainless steel, no welding, from 3/4 to 4/4 hard
- Compression fitting**.....316 L stainless steel flange welded on contact tip  
PN and DN to be specified according to application  
PN 40 DN 25 standard.
- Electrical connection**.....with or without terminal block  
4/20mA 0/10V transmitter as option
- Connection head**.....Aluminium alloy  
Cable gland : M20 x 1,5  
IP65 protection
- Adjustable mountings**.....replaceable element

PT 100


## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

\*Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fitting



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell





**RTD sensor  
with standard head, resistive  
element and clamp fitting**




**TBRC 50 / TBRCD 50**

- Temperature sensor with stainless steel contact tip and clamp fitting.
- Measuring range (According to reference) **from -80°C to +400°C** (PT100 and PT1000).  
**from -20°C to +120°C** (NTC).
- Mounting of wire : **single pair** (2,3 or 4 wires).  
**multipair** (4 or 6 wires).
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

**Part numbers**

To order, just add the codes to complete the part number.

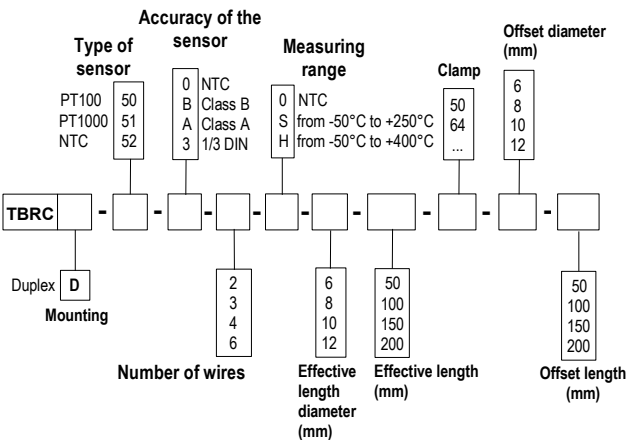


\* Other dimensions on request

**Example : TBRC-50-B-3-S-6-100-50-6-50.**

**Model :** PT 100 temperature sensor, class B, 3 wires mounted on contact tip with an effective length of 100 mm and 6 mm Ø and with an offset length of 50 mm and 6 mm Ø. Contact tip with clamp fitting of 50,5 mm Ø for a ferrule DN from 25 to 42,4 mm.

**Standard measuring range from -50°C to 250°C.**

**Dimensions**

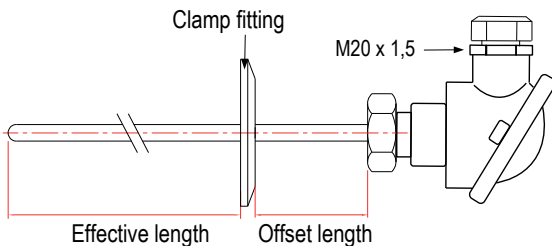

**Technical features**

**Working temperature**.....from -80°C to +400°C (PT100 and PT1000)  
(According to reference) from -20°C to +120°C (NTC)

**Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
NTC : see "Tolerances" table

**Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
NTC : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%

**Mounting of wire**.....**single pair 2, 3 or 4 wires**  
For T>250°C do not use 4 wires in a sheath of 6mm Ø.  
**multipair 4 or 6 wires**  
For T>250°C use sheath from 8 mm Ø.



**Storage temperature**.....from -20°C to +80°C

**Contact tip**.....316 L stainless steel, no welding, 3/4 to 4/4 hard

**Clamp fitting**.....stainless steel 316 L  
- **Standard**  
50 : Solid end caps 50,5 mm Ø for ferrules DN 25 at 42,4mm  
64 : Solid end caps 64 mm Ø for ferrule DN 48,3 at 51mm  
(other clamp solid end caps on request)  
- **Accessories**  
Ferrule and clamp on request

**Thread**.....1/4, 1/2, male Gas or NPT plug  
(other tread on request)

**Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option


**Connection head**.....aluminium alloy  
cable gland : M20 x 1,5  
IP65 protection

**Adjustable mountings**.....See catalogue or data sheet of specific mountings.

PT 100


## Useful information on thermometry with platinum resistor PT100, PT1000 or NTC .

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerance\* of PT100 and PT1000 probes.

Norms as per IEC 751 (1993), BS 1904 (1984) et DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C ± Ohms		± °C ± Ohms		± °C ± Ohms	
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0,5°C
from 0°C to +70°C	± 0,2 °C
from +70°C to +100°C	± 0,5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.


## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼ " or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



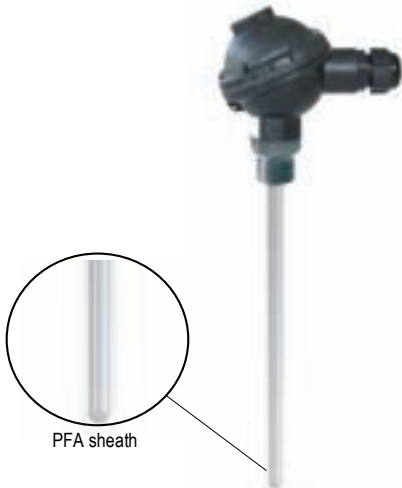


*Temperature probe  
at resistive element for  
aggressive environment*

**TPGT 50 – TPGTD 50**

- Temperature sensor with or without compression fitting and contact tip covered with a PFA sheath
- Measuring range from **-50°C to +250°C (PT100 and PT1000)**  
from **-20 °C to +120 °C (NTC)**
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

PT 100

**Part numbers**

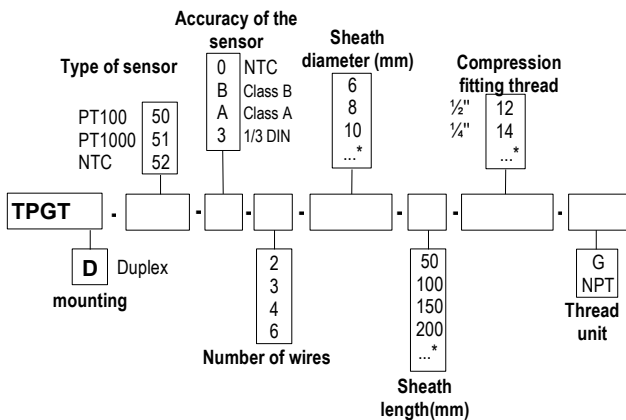


\* Other dimension on request

Example : TPGT50-B-3-6-500

Model : PT 100 temperature sensor class B, 3 wires, contact tip diameter 6 mm and length 500 mm with a PFA sheath of 500 mm length.

Measuring range : from -40 to +120 °C

**Dimensions**

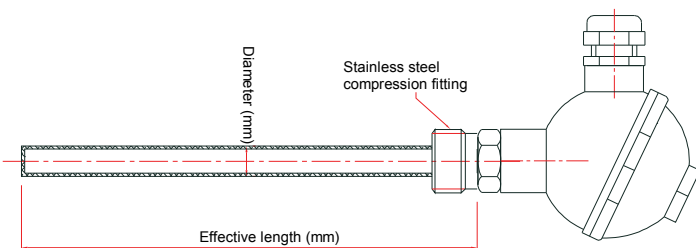


**Technical features**

- Operating temperature**.....from -50°C to +250°C (PT100 and PT1000)  
(other on request)  
from -20°C to +120°C (NTC)
- Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance at 25°C, R<sub>25</sub> = 10KΩ  
Nominal Beta B25/85 value = 3,695K ±1%
- Mounting of wire**.....simple pair 2, 3 or 4 wires  
multipair : 4 or 6 wires
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....stainless steel 316 L covered with PFA  
(perfluoroalkoxy) sheath  
Max. temperature at short term use : 280 °C  
Softening at +/- 327 °C
- Compression fitting**.....stainless steel 316 L
- Thread**.....1/4, 1/2, male Gas or NPT plug  
(other tread on request)
- Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option
- Connection head**.....noryl resin (phenyl polyoxyd)  
Cable gland : M20 x 1,5  
temperature : from -40 to +135 °C  
IP 65 protection
- Adjustable mountings**.....angled probe, interchangeable element,  
Offset head


## Useful information on thermometry with platinum resistor PT100.

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerances\* of PT100 and PT1000 probes

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω

## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2 °C
from +70°C to +100°C	± 0.5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell






*Temperature probe  
at resistive element for  
aggressive environment*

**TPTT 50 – TPTTD 50**

- Temperature probe with PFA compression fitting and contact tip
- Measuring range from **-50°C to +250°C (PT100 and PT1000)**  
from **-20 °C to +120 °C (NTC)**
- For other resistor type PT25, PT50, PT500, PT200 or NI, please contact us.

PT 100

**Part numbers**

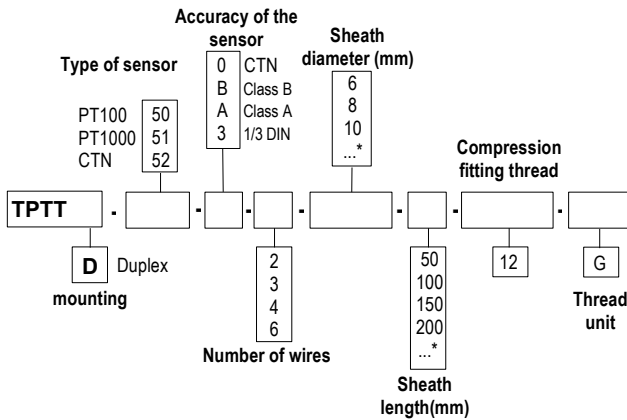


\* Other dimension on request

**Example :** TPTT50-B-3-6-500

**Model :** Temperature probe PT100 Class B, 3 wires, contact tip diameter 6 mm and length 500 mm PFA sheath of 500 mm length.

**Measuring range :** from -40 to +120 °C

**Dimensions**

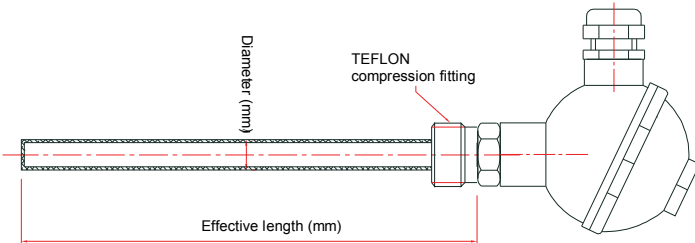


**Technical features**

- Operating temperature**.....from -50°C to +250°C (PT100 and PT1000)  
(other on request)  
from -20°C to +120°C (NTC)
- Accuracy**.....**PT100 or PT1000** : see "Tolerances" table  
**NTC** : see "Tolerances" table
- Type of sensor**.....**PT100 or PT1000** : Class B, Class A,  
1/3 DIN as per DIN IEC751  
**NTC** : resistance at 25°C,  $R_{25} = 10K\Omega$
- Mounting of wire**.....simple pair 2, 3 or 4 wires  
multipair : 4 or 6 wires
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....stainless steel 316 L covered with PFA  
(perfluoralkoxy) sheath  
Max. temperature at short term use : 280 °C  
Softening at +/- 327 °C
- Compression fitting**.....polytetrafluorethylene PTFE
- Thread**.....1/4, 1/2, male Gas or NPT plug  
(other tread on request)
- Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option
- Connection head**.....noryl resin (phenyl polyoxyd)  
Cable gland : M20 x 1,5  
temperature : from -40 to +135 °C  
IP 65 protection
- Adjustable mountings**.....angled probe, interchangeable element,  
Offset head




## Useful information on thermometry with platinum resistor PT100.

### • 2-wire connection




This is the simplest way, but line resistors (RL1 and RL2) are connected to the sensor in a series circuit. The addition of RL1 + RL2, leads to an off-set between measured temperature and real temperature. This connection must be avoided.

### • 3-wire connection



This connection involves identical line resistors (RL1-RL2-RL3), RL2 + RL3 allow you to measure the line resistance that will be subtracted from the measured resistance between 1 and 2' terminals. This is the most common connection.

### • 4-wire connection



Regulated current is going through 11' and 22' terminals and the measurement is made at the sensor terminals, so none of the line resistors are taken into account. This is the most accurate connection.

## Tolerances\* of PT100 and PT1000 probes

Norms as per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980).

Temp °C	Tolerances					
	Class B		Class A		1/3 DIN	
	± °C	± Ohms	± °C	± Ohms	± °C	± Ohms
-100	0.8	0.32	0.35	0.14	0.27	0.11
-50	0.55	0.22	0.25	0.1	0.19	0.08
0	0.3	0.12	0.15	0.06	0.1	0.04
100	0.8	0.3	0.35	0.13	0.27	0.1
200	1.3	0.48	0.55	0.2	0.44	0.16
300	1.8	0.64	0.75	0.27	0.6	0.21
400	2.3	0.79	0.95	0.33	0.77	0.26

Resistance values for PT1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). I.e : at 0°C for Class B PT1000 ± 0.3°C → ± 1.2 Ω


## Tolerances\* of NTC probes

Measuring range °C	Tolerances °C
from -20°C to 0°C	± 0.5°C
from 0°C to +70°C	± 0.2 °C
from +70°C to +100°C	± 0.5 °C

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

## Accessories (See data sheet)

- Transmitter output 4/20 mA or 0/10V
- Wall fixing support
- Stainless steel mounting bracket
- ¼" or ½" Gas screw nut
- Stainless steel compression fitting
- Teflon or stainless steel ferrule for compression fittings



- Sleeve to weld for food industry
- Stainless steel union fitting
- ½" Gas or NPT thread cuff
- Thermo-conducting silicone grease
- Calibration certificate
- Thermowell



*Temperature probe at  
resistive element for wine application*

**TM 50 / TPV 50 / SF 50**

**TPV 50**




**SF 50**



**TM 50**




**A installation**




Head probe mounted vertically in the tank with removable head connection

**D installation**




Cable probe mounted in a thermowell on the side of the tank

**E installation**




Head probe for measuring temperature on a water pipeline

**B installation**



Head probe mounted vertically in the tank

**C installation**



Head probe mounted in a thermowell on the side of the tank


- Head or wire temperature probe with or without compression fitting and stainless steel contact tip
- **Probe with** aluminium head (TM 50) or noryl resin (TPV 50), PT 100 Class B, IP65.
- **Wire probe** PT 100 or PT 1000 Class B with Contact tip mounted on PVC cable
- Measuring range  
from **-50°C to +250°C** (TM 50 and TPV 50).  
from **-40°C to +120°C** (SF 50).
- Mounting of element : **simple** (2 or 3 wires).

PT 100

# TPVD 50

## Installation A

Head probe mounted vertically in the tank with **removable** head connection

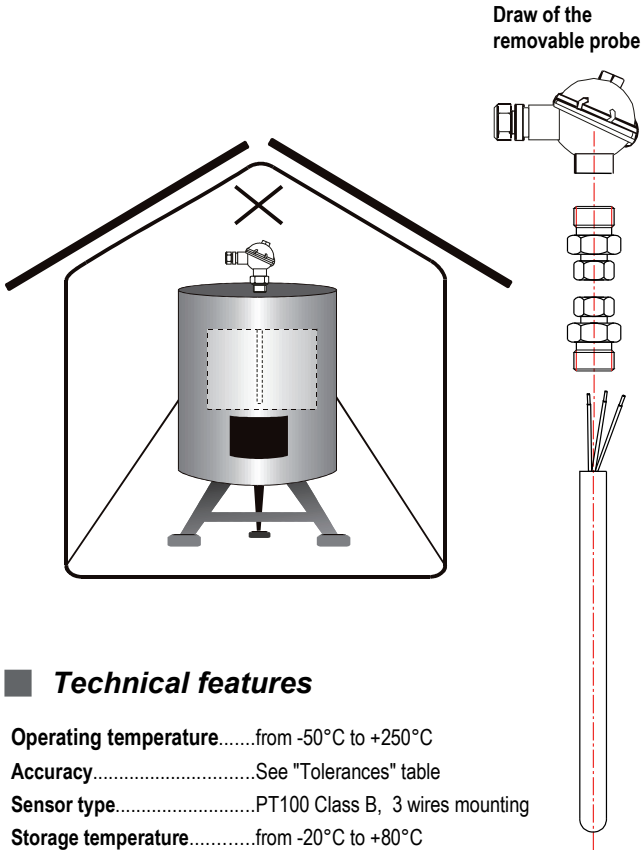


### Technical features

- Operating temperature**.....from -50°C to +250°C
- Accuracy**.....See "Tolerances" table
- Sensor type**.....PT100 Class B, 3 wires mounting
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....stainless steel 304 L, 14 mm diameter  
Defining length according to mounting on tank
- Connection**.....Stainless steel fitting removable to the 1/2"G male thread  
Teflon clamp ring
- Thread**.....with or without, 1/4, 1/2, Gas or NPT plug  
(other thread on request)
- Connection head**.....noryl resin  
IP65 protection  
Removable head mounted on 1/2"G male thread  
stainless steel connection
- Electrical connection**.....terminal block with 3 screws
- Accessories**.....connection cable (lyflex 3 x 0,75 mm<sup>2</sup>)  
Welding sleeve

### Part numbers

To order, just add the codes to complete part number.

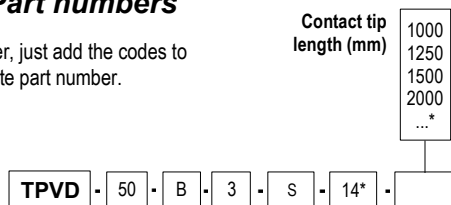

\* Other dimension on request


**Example :** TPVD-50-B-3-S-14-1000.

**Model :** PT 100 temperature probe class B, 3 wires with diameter of 14 mm and contact tip length of 1000 mm .  
Standard measuring range **from -50°C to 250°C.**

# TPV 50

## Installation B

Head probe mounted vertically in the tank

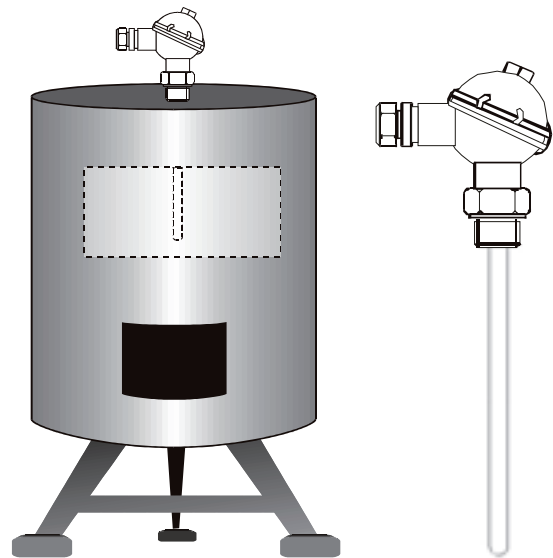


### Technical features

- Operating temperature**.....from -50°C to +250°C
- Accuracy**.....See "Tolerances" table
- Sensor type**.....PT100 Class B, 3 wires mounting
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....stainless steel 304 L, 14 mm diameter  
Defining length according to mounting on tank
- Connection**.....Stainless steel fitting to the 1/2"G male thread
- Connection head**.....noryl resin  
IP65 protection
- Electrical connection**.....terminal block with 3 screws
- Accessories**.....connection cable (lyflex 3 x 0,75 mm<sup>2</sup>)  
Welding sleeve

### Part numbers

To order, just add the codes to complete the part number.

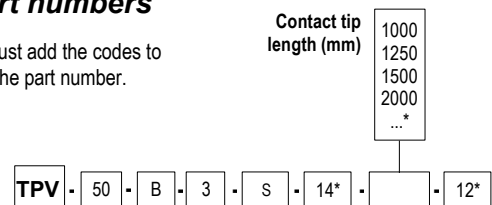

\* Other dimension on request


**Example :** TPV-50-B-3-S-14-1000.

**Model :** PT 100 temperature probe class B, 3 wires with diameter of 14 mm and contact tip length of 1000 mm .  
Standard measuring range **from -50°C to 250°C.**

# TPV 50

## Installation C

Head probe mounted in a thermowell on the side of the tank



### Technical features

- Operating temperature.....from -50°C to +250°C
- Accuracy.....See "Tolerances" table
- Sensor type.....PT100 Class B, 3 wires mounting
- Storage temperature.....from -20°C to +80°C
- Contact tip.....stainless steel 304 L, diameter 6 mm  
Defining length according to mounting on tank
- Connection.....Stainless steel connection to 1/2G male thread
- Connection head.....noryl resin  
IP65 protection
- Electrical connection.....terminal block with 3 screws
- Accessories.....connecting cable (lyflex 3 x 0,75 mm<sup>2</sup>)

### Thermowell features

- Contact tip.....stainless steel 304 L, diameter of 21,3 mm  
Defining length according to mounting on tank
- Connection.....Connection to weld on the tank  
Probe side : 1/2G female thread
- Optional.....shrink at 8 mm at the end of the thermowell

### Part numbers

To order, just add the codes to complete part number.

490	Contact tip length (mm)
590	
650	
...*	

TPV - 50 - B - 3 - S - 6\* - [ ]

\* Other dimension on request


Example : TPV-50-B-3-S-14-1000.

Model : PT 100 temperature probe class B, 3 wires with Ø 6 mm and contact tip length of 1000 mm.


Standard measuring range from -50°C to 250°C.

### Wine growing thermowell

- Standard model




- Model with shrink



# SF 50

## Installation D


Cable probe mounted in a thermowell on the side of the tank



### Technical features

- Operating temperature.....from -40°C to +120°C
- Accuracy.....See "Tolerances" table
- Sensor type.....PT100 or PT1000
- Storage temperature.....from -20°C to +80°C
- Working temperature of cable.....PVC : from -40°C to +120°C
- Contact tip.....stainless steel 316 L, waterproof crimping with heat-shrink tubing

### Dimensions

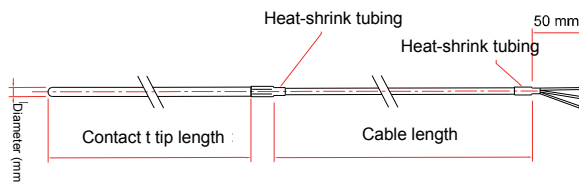

### Part numbers

To order, just add the codes to complete part number.

Sensor type	Number of wire	Cable length (m)	Contact tip diameter (mm)	Contact tip length (mm)
PT100	50	1	4	50
PT1000	51	2	6	100
		3	8	200
		4	...	300
		5	...	400
		...*	...	...*

SF - [ ] - B - [ ] - P - [ ] - [ ] - [ ]

\* Other dimension on request

Example : SF51-B-2-P-1-4-100

Model : PT1000 temperature probe class B, 2 wires, PVC cable of 1 m length.

Stainless steel contact tip of Ø 4 mm and length of 100 mm.

Measuring range from -40 to +120°C.

- Part numbers

Thermowell length (mm)	500	RT	Shrink
	600		
	660		

DG - M - 213 - [ ] - [ ]


Example : DG-M-213-500-RT.

Model : thermowell with sleeve weld on the tank. Contact tip diameter of 21,3 mm and length of 500 mm with shrink of 8 mm.

# TM 50

## Installation E

Head probe for measuring temperature on a water pipeline

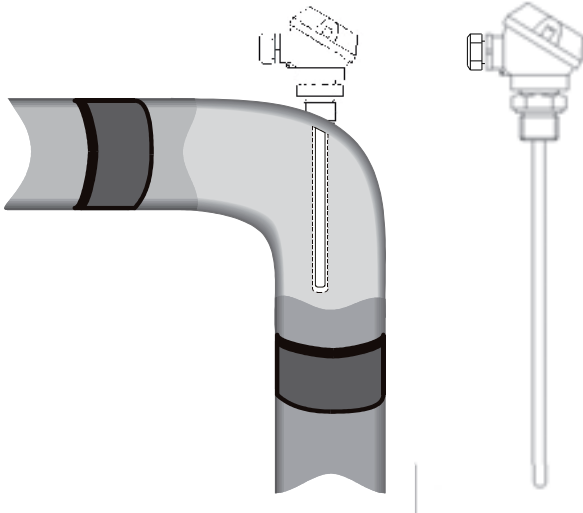


## Technical features

- Operating temperature.....from -50°C to +250°C
- Accuracy.....See "Tolerances" table
- Sensor type.....PT100 Class B, 3 wires mounting
- Storage temperature.....from -20°C to +80°C
- Contact tip.....stainless steel 316 L, diameter of 6 mm  
Optional : Welding sleeve
- Connection.....Stainless steel fitting to the ½G male thread
- Connection head.....miniature head in aluminium alloy  
IP65 protection
- Electrical connection.....terminal block with 3 screws
- Accessories.....connection cable (lyflex 3 x 0,75 mm<sup>2</sup>)  
Welding sleeve

## Part numbers

To order, just add the codes to complete part number.

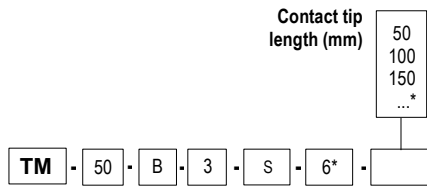

\* Other dimension on request

Example : TM-50-B-3-S-6-50.

Model : PT 100 temperature probe class B, 3 wires with diameter of 6 mm and contact tip length of 50 mm.  
Standard measuring range from -50°C to 250°C.

## Tolerances\* of Pt100 and Pt1000 resistive probes

As per IEC 751 (1993), BS 1904 (1984) and DIN 43760 (1980) norms

Temp °C	Tolerances	
	Class B	
	± °C	± Ohms
-100	0,8	0,32
-50	0,55	0,22
0	0,3	0,12
100	0,8	0,3
200	1,3	0,48
300	1,8	0,64
400	2,3	0,79

Resistance values for Pt1000 (Ω) must be multiplied by 10 for the same corresponding temperature value (°C). For example: at 0°C for Class B Pt1000 ± 0,3°C → ± 1,2 Ω

\*all accuracies indicated in this technical data sheet were stated in laboratory conditions, and can be guaranteed for measurements carried out in the same conditions, or carried out with calibration compensation.

Ref. FT - wine-application - 03/07 A - RCS (24) Péjigueux B349 282 095 Non-contractual document - We reserve the right to modify the characteristics of our products without prior notice.


*Temperature sensor  
PT 100 with grip handle*  
**Special Fermenting room**

**CROS - R - 1700**



- Class A Pt 100
- Measuring range from **-50°C to +250°C**
- Length of 1700 mm, others on request
- Stainless steel protection sheath
- Stainless steel grip handle
- Tip with shrink for a very fast response time
- Probes compatible with KISTOCK temperature dataloggers and portable thermometers

Special probes **Fermenting room** allow to measure temperature in the specific conditions of wine-making process.

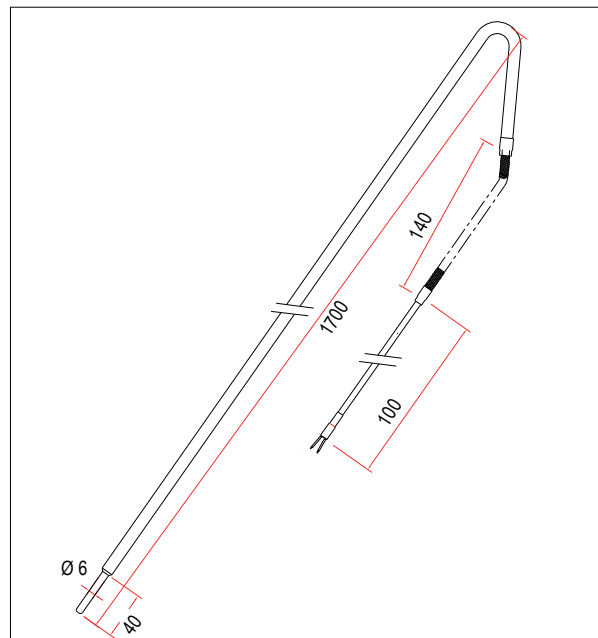

PT 100

## ■ Description

### Grip handle



Reinforced cable output with flexible  
Shielded Teflon cable

### Shrink



Protection sheath in food-  
industry stainless steel 316 L  
Ø 10 mm, shrink in 6 mm

## ■ Specifications

Probe	Length	Range	Accuracy	Compatible with...
CROS-R-1700	1700 mm	from -50 to +250°C	±0.4% of reading* or ±0.3°C	<b>Portable thermometers :</b> TR100

\*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation. The accuracy is expressed either by a deviation in °C, or by a percentage of the value concerned. Only the bigger value is considered.

## ■ Optional

- Protection cover IP65.
- Calibration certificate.
- Portable thermometers .
- Temperature datalogger

### With KISTOCK temperature datalogger



### With portable thermometers




# Temperature probes

## thermocouple K / NTC / PT100

### Special compost

- Measuring ranges from -50°C to +400°C
- Lengths from 1000 mm to 2000 mm
- Protection sheath made in stainless steel, perpendicular handle and bevel-edged tip
- Robust and hard-wearing
- Probes compatible with temperature dataloggers and with portable thermometers

Temperature dataloggers version\*.

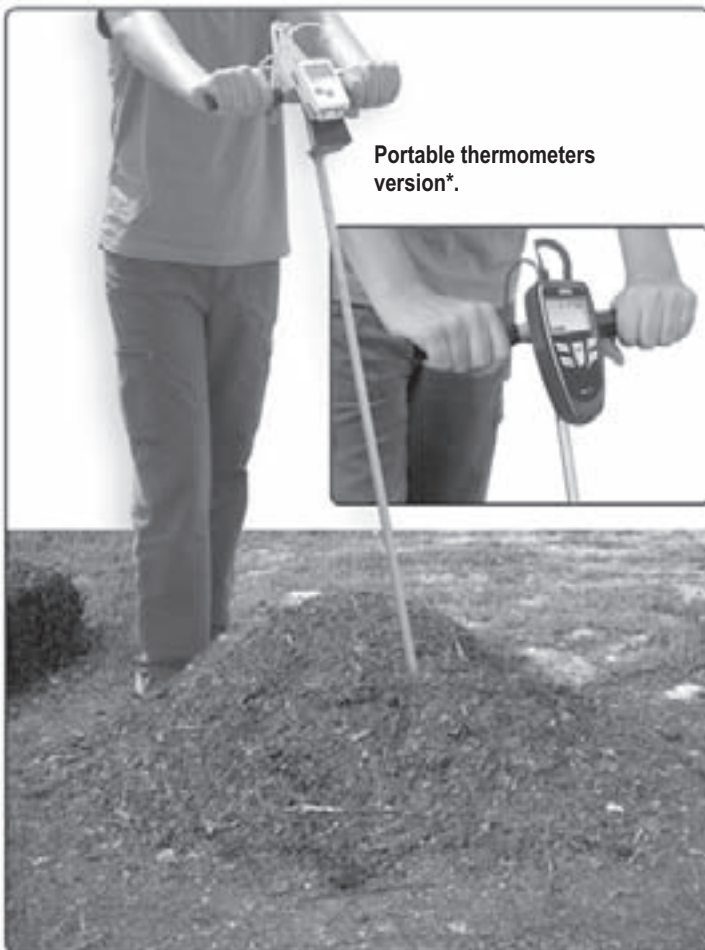


Portable thermometers version\*.

\*Sold separately.

The “**Special compost**” temperature probes allow measurement in specific environments such as:

#### Compost

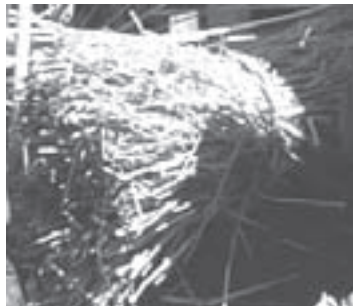

Straw



Grain elevator

PT 100



## Description

**Perpendicular handle**  
2 x 150 mm, Ø 21,3 mm



**Bevel-edged tip**




**NTC plug**




**PT100 plug**



**Thermocouple K plug**



**Protection sheath**  
stainless steel 316 L  
Ø 16 x 2 mm  
**Grounded hot junction**

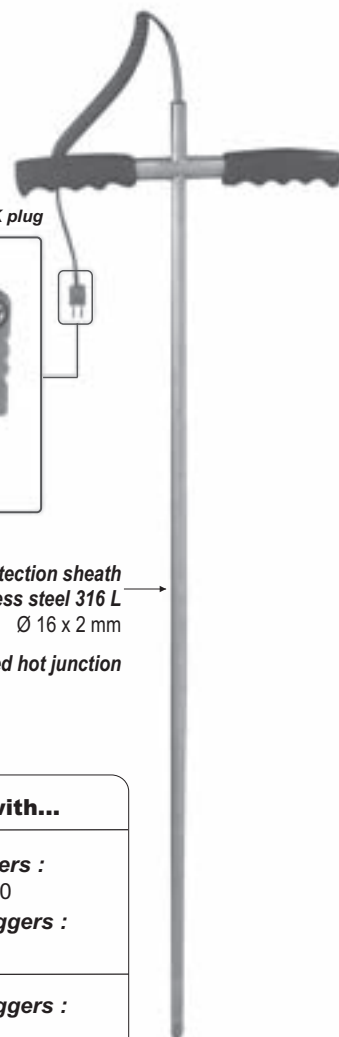

## Specifications

Probe	Length	Measuring range	Accuracy	Compatible with...
<b>STKP 1000</b> <b>STKP 1500</b> <b>STKP 2000</b>	1000 mm 1500 mm 2000 mm	de -50°C à +400°C	± 1.1°C ± 0.4% of value displayed	<b>Portable thermometers :</b> TK50 / TK100 / TM200 <b>Temperature dataloggers :</b> KTT300
<b>KCC 1500 I</b> (CTN)	1500 mm	de -40°C à +120°C	± 0.3°C (-25°C < T < +70°C) ± 0.5°C above	<b>Temperature dataloggers :</b> Classes 100 / 200
<b>KRCI 1500</b> (PT100)	1500 mm	de -50°C à +400°C	± 0.3°C ± 0.4% of value displayed	<b>Temperature dataloggers :</b> Class 300

## Options

The **KSP** stand allows you to fasten temperature devices (portable or datalogger) to the probe, making measuring campaigns easier.



**Fastening on stand with temperature datalogger**




**Fastening on stand with portable thermometers**



**Part 3 : Wire thermocouple**



**F**  
with visible welding.....p 113



**F KI**  
mineral insulated thermocouple.....p 115



**SF K - SF KI**  
thermocouple with cable.....p 117



**SFR K**  
with fitting of fixation.....p 119



**SFC K**  
with angled or lined inconel thermocouple.....p 121



**SFP K**  
penetration probe.....p 125



**SFPP K**  
with handle to prick.....p 127



**SFPPT K**  
with T handle.....p 131



**SFAI K**  
with magnetic mounting.....p 133



**SFO K**  
for measurement of contact by eyelet.....p 135



**SFCT K**  
with cable for pipe.....p 137



**SFCS K**  
for surface contact.....p 139



**SFBA K**  
with bayonet.....p 141



**SFCS M**  
for moving parts.....p 143









**Thermocouple probe  
with cable and visible welding**

**FT / FJ / FK**

- Thermocouple types T, J, K or N.
- Thermocouple with short reponse time.
- Measuring range **from -40°C to +400°C**.
- Singlepair mounting with choice of cable.

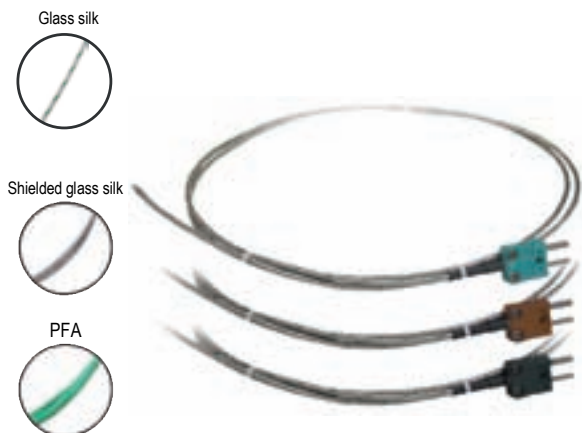


**Part number**

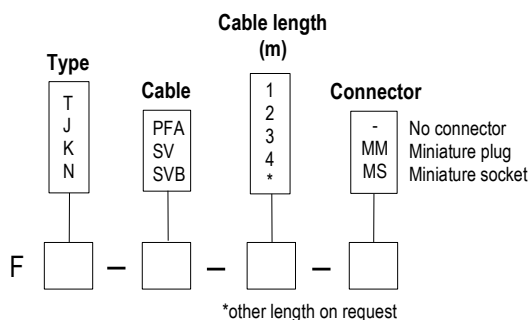

**Example : FT-PFA-2-MM**  
**Model :** Thermocouple type T with glass silk cable, 2m long and with a miniature plug output.

**Probe dimensions**

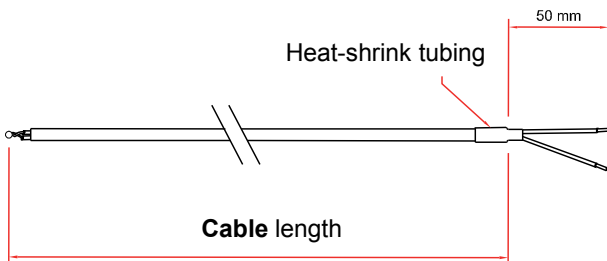

**Technical feature**

**Operating temperature**..... PFA cable : from -40°C to +250°C  
 (TCK / TCJ / TCT / TCN)  
 Glass silk cable : from -40°C to +400°C  
 (For TCT : from -40°C to +350°C)

**Accuracy for class 1**..... See "Tolerances" table

**Storage temperature**..... from -20°C to +80°C

**Class 1 thermocouple**..... PFA cable : Teflon<sup>®</sup>  
 SV cable : Glass silk  
 SVB cable : Shielded glass silk

**Output** ..... stripped wire, miniature plug or standard on request.

**Tolerances**

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°



## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE


## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

**Mineral insulated thermocouple  
with miniature or standard connectors**


**FKI**

- Thermocouple types T, J, K, S or N.
- Mineral insulated sheath to be formed to shape and terminated in a miniature or standard connector.

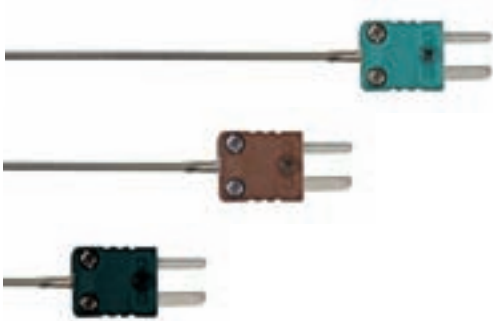

**Part numbers for miniature connector output**


To order, just add the codes to complete the part number.

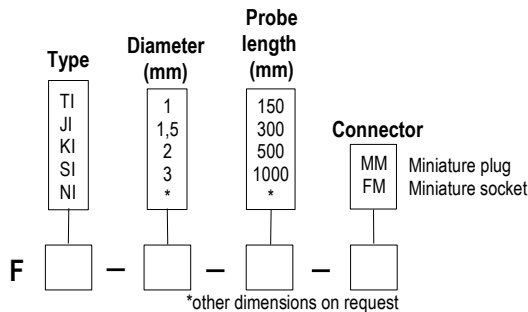

**Example : FTI-15-150-MM**

**Model :** Thermocouple type T with mineral insulated sheath, length 150 mm and 1.5 mm Ø. Sheath terminated in a miniature plug.


**Part numbers for standard connector output**

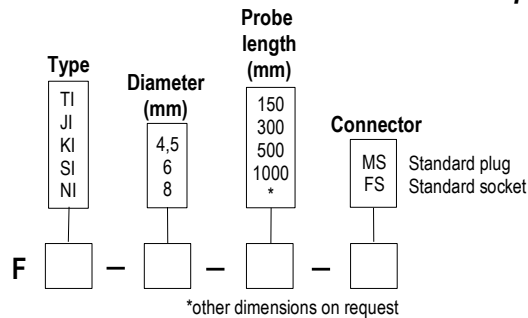

**Example : FTI-45-150-FS**

**Model :** Thermocouple type T with mineral insulated sheath, length 150 mm and 4.5 mm Ø. Sheath terminated in a miniature plug.

**Dimensions**

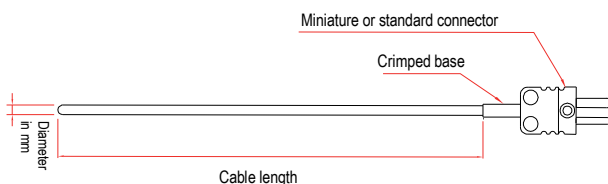

**Technical feature**

**Working temperature**..... from -40°C to +350°C for Tc T  
from -40°C to +750°C for Tc J  
from -40°C to +1000°C for Tc K  
from -40°C to +1000°C for Tc N  
from 0°C to +1100°C for Tc S

**Accuracy for class 1**..... See "Tolerances" table

**Mounting**..... Ungrounded or grounded hot junction.  
Inconel 600 Mineral insulated or 326 L stainless steel according to thermocouple type.

**Storage temperature**..... from -20°C to +80°C

**Connector output**..... Miniature from 0.5 to 3 mm Ø  
Standard from 4.5 to 8 mm Ø  
Or other on request.

**Connector rated up to**..... 135°C

**Tolerances**

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
S	From 0°C to +1600°C	From 0 to +1100°C ± 1°C From 1100°C to 1600°C ± (1 + 0.003*(T°-1100))

Thermocouple

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE

## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters




**Mineral insulated or stainless steel sheathed thermocouple with cable**

**SFK / SFKI**

- Thermocouple types T, J, K, N or S.
- Measuring range from **-40°C to +1000°C**
- Sheath of 316 L Stainless steel or Inconel 600

**Part numbers for stainless steel sheath 550°C max.**


To order, just add the codes to complete the part number.

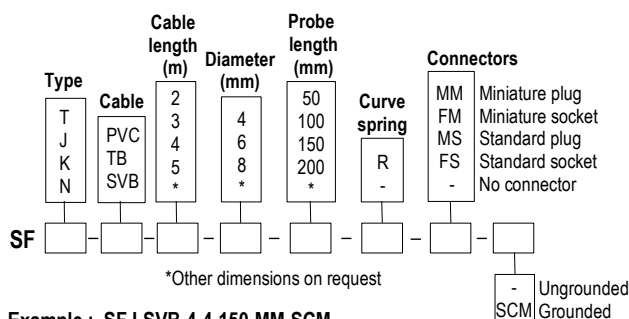

**Example : SFJ-SVB-4-4-150-MM-SCM**

**Model :** Thermocouple type J with grounded hot junction. Stainless steel protective sheath 4 mm Ø, length 150 mm without curve spring. Glass silk cable terminated in a miniature plug.


**Part numbers for mineral insulated sheath 1000°C max.**

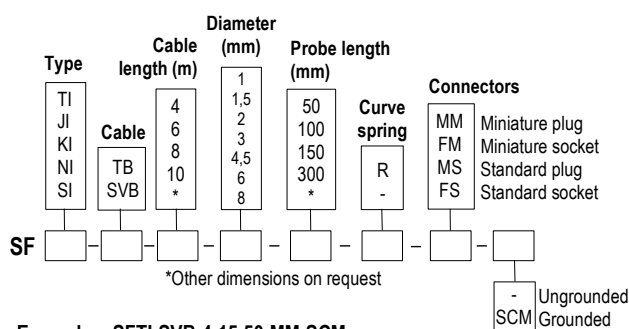

**Example : SFTI-SVB-4-15-50-MM-SCM**

**Model :** Thermocouple type T with grounded hot junction. Inconel 600 protective sheath 1.5 mm Ø, length 150 mm without curve spring. Glass silk cable terminated in a miniature plug.

**Dimensions**

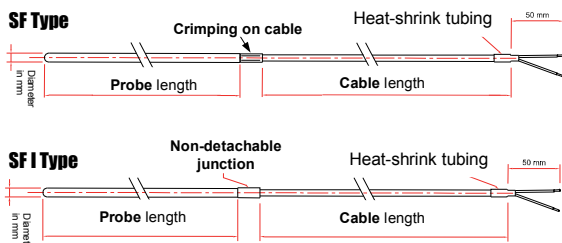

**Technical feature**

**Working temperature**..... For **SF** category  
 from -40°C to +105°C for PVC cable  
 from -40°C to +260°C for TB cable  
 from -40°C to +400°C for SVB cable (Tc J)  
 from -40°C to +550°C for SVB cable (Tc K and N)



**See pot seal below**

For **SF-I** category (mineral insulated)  
 from -40°C to +350°C for Tc T  
 from -40°C to +750°C for Tc J  
 from -40°C to +1000°C for Tc K  
 from -40°C to +1000°C for Tc N  
 from 0°C to +1000°C for Tc S

**Accuracy for class 1**..... See "Tolerances" table

**Type of welding**..... Default ungrounded hot junction  
 For grounded hot junction, SCM must be added at the end of the part number.

**Pot seal mounting**..... 5 mm Ø, length 50 mm, non-detachable for SF-I category with PVC cable shielded Teflon or glass silk.  
 Max. temperature : 200°C

**Storage temperature**..... from -20°C to +80°C

**Output** ..... stripped wires, miniature or standard plugs available on request.

**Tolerances**

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
S	From 0°C to +1600°C	From 0 to +1100°C ± 1°C From 1100°C to 1600°C ± (1 + 0.003*(T°-1100))

Thermocouple



## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE

## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters



**Cable thermocouple temperature sensor with fitting of fixation**

**SFR K / SFR KI**

- Thermocouple types T, J, K and N
- Measuring range from **-40°C to +1000°C**
- Mounting with 316 L stainless steel contact tip or inconel 600

**Stainless steel contact tip 550 °C max part numbers**

Type	Cable length (m)	Diameter (mm)	Contact tip length (mm)	Fitting	Connector
T	1	4	50	12	MM Male miniature
J	2	6	100	14	FM Female miniature
K	3	8	150	14	MS Male standard
N	4	*	200	...	FS Female standard
	*		*	Other	- Without connector

SFR [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]

\*other dimension on request

Curve spring [R] Insulated To earth [SCM]

Example : SFRJ-SVB-4-4-150-12-R-MM-SCM

Model : J type thermocouple temperature probe welded to earth with contact tip of 150 mm and 4 mm Ø mounted on shielded glass silk cable of 4 m with a male miniature connector on the end . ½ G male compression fitting and curve spring.

**Lined contact tip 1000°C max. part numbers**

Type	Cable length (m)	Diameter (mm)	Contact tip length (mm)	Fitting	Connector
TI	1	4,5	50	12	MM Male miniature
J	2	6	100	14	FM Female miniature
K	3	8	150	14	MS Male standard
N	4	*	200	...	FS Female standard
	*		*	Other	- Without connector

SFR [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]


\*other dimension on request

Curve spring [R] Insulated To earth [SCM]

Example : SFRJI-SVB-4-45-150-12-R-MM-SCM

Model : J type thermocouple temperature probe in inconel welded to earth with contact tip of 150 mm, 4,5 mm Ø mounted on shielded glass silk cable of 4 m with a male miniature connector on the end . ½ G male compression fitting and curve spring.

**Dimensions**

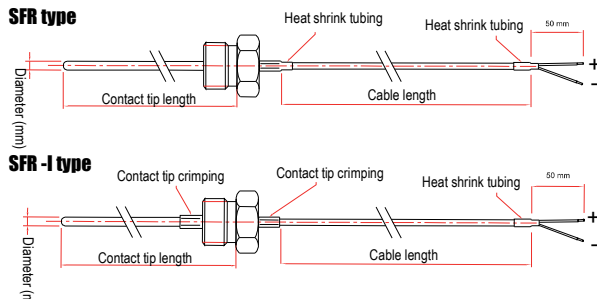

**Technical features**

Working temperature.....*For SFR series*  
 from -40°C to +105°C for PVC output  
 from -40°C to +260°C for TB output  
 from -40°C to +400°C for SVB output  
 from -40°C to +550°C for SVB (Tc K) output

*For SFR-I series, lined mountings*  
 from -40°C to +350°C for Tc T  
 from -40°C to +750°C for Tc J  
 from -40°C to +1000°C for Tc K  
 from -40°C to +1000°C for Tc N

Recommended temperature...*According to inconel 600 contact tip Ø*  
 from 0.5 to 1 mm Ø : until 300°C  
 from Ø1.5 to 2 mm Ø : until 750°C  
 3 mm Ø : until 900°C  
 from 4.5 to 8 mm Ø : until 1000°C



Accuracy for class 1.....See "Tolerances" table

Mounting of welding.....Insulated hot welding in standard  
 Add SCM to part number for a mounting with hot welding to earth.

Storage temperature.....from -20°C to +80°C

Output.....stripped wires, male miniature connector or standard on request.

Compression fitting.....316 L stainless steel

Thread.....½ or ¼ au pas gaz

Contact tip.....316 L stainless steel or inconel 600  
 Curve spring as option

**Tolerances of the probe**

TC	Measuring range Class 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T° abs
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T° abs
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs

Thermocouple

## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters

**Wire and angled or lined inconel thermocouple temperature sensor with or without fitting**



**Type SFC K et SFCR K**

SFC K – SFCD K – SFCR K – SFCRD K

■ **Sensor features**

- Temperature sensor mounted on conductor cables with angled contact tip with or without stainless steel compression fitting.
- Thermocouple types T, J, K and N
- Measuring range from -40°C to +1000°C
- Mounting with 316 L stainless steel contact tip or inconel 600

■ **Technical features**

**Working temperature**.....*For SFCK and SFCRK series*  
(According to cable) from -40°C to +105°C for PB output  
from -40°C to +260°C for TB output  
from -40°C to +400°C for SVB output  
from -40°C to +550°C for SVB (Tc K) output

*For SFCKI and SFCRKI series*  
from -40°C to +750°C for Tc J  
from -40°C to +1000°C for Tc K and Tc N

**Recommended temperature**.....According to contact tip Ø in inconel 600  
from Ø 0.5 to 1 mm : until 300°C  
from Ø 1.5 to 2 mm : until 750°C  
Ø 3 mm : until 900°C  
from Ø 4.5 to 8 mm : until 1000°C



**Accuracy for class 1**.....See "Tolerances" table

**Mounting of the welding**.....Insulated hot welding in standard  
Add SCM to part number for a mounting at hot welding to earth.

**Storage temperature**.....from -20°C to +80°C

**Output**.....stripped wires, male miniature connector or standard on request


**Contact tip and fitting**.....*For SFCK and SFCRK series*  
316 L stainless steel  
Angled at 90° (Other on request)  
Waterproof crimping with heat-shrink tubing  
(Unless glass silk cable with single crimping on stainless steel sheath)  
Curve spring as option

*For SFCKI and SFCRKI series*  
Inconel contact tip 600 T max. 1000°C  
Stainless steel compression fitting 316L T max. 800°C  
Angled at 90° (Other on request)

**Thread of the fitting**.....**1/2" or 1/4" au pas Gaz**

**Mounting of the fitting**.....**On L2 length (See schema)** : 12 or 14 corresponding to 1/2" G and 1/4" G compression fitting  
**On L1 length (See schema)** : 12L1 or 14L1 corresponding to 1/2" G et 1/4" G compression fitting

T° maxi of L2 : 800 °C for this specific case




Thermocouple

# SFC & SFC-I

Angled wire probe or lined inconel



## Dimensions

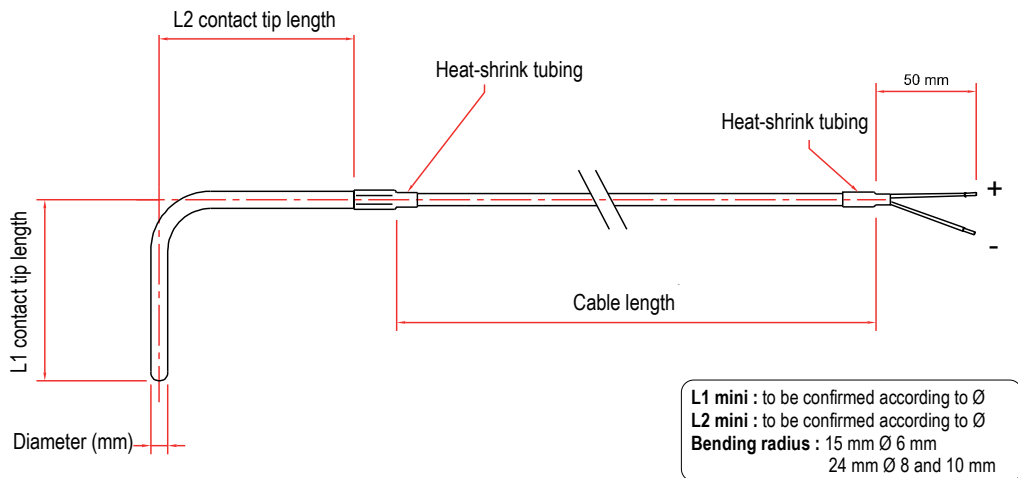

## Part numbers

### • SFC - Stainless steel contact tip -

Type	Cable	Cable length (m)	Diameter (mm)	L1 contact tip (mm)	L2 contact tip (mm)	Angle	Curve spring	Connector
T	PB	1	4	50	50	90	R	MM Male miniature
J	TB	2	4	100	100			FM Female miniature
K	SVB	3	6	150	150			MS Male standard
K		4	8	200	200			FS Female standard
N		*	*	200*	200*			- Without connector

SFC [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

\*other on request

[ ] Insulated To earth

Example : SFCJ-SVB-4-4-100-100-90-MM-SCM

Model : J thermocouple sensor welded to earth with stainless steel contact tip Ø 4 mm angled at 90° and L1 and L2 lengths of 100 mm, without curve spring and mounted on shielded glass silk cable ended by a male miniature connector.

### • SFC-I – Inconel contact tip -

Type	Cable	Cable length (m)	Diameter (mm)	L1 contact tip (mm)	L2 contact tip (mm)	Angle	Curve spring	Connector
J	TB	1	6	50	50	90	R	MM Male miniature
K	SVB	2	6	100	100			FM Female miniature
I		3	8	150	150			MS Male standard
N		4	*	200	200			FS Female standard
		*	*	200*	200*			- Without connector

SFC [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

\*other on request

[ ] Insulated To earth

Example : SFCJI-SVB-4-6-100-100-90-MM

Model : J thermocouple sensor, insulated welding with lined inconel contact tip of 6 mm Ø angled at 90° and L1 and L2 lengths of 100 mm, without curve spring and mounted on shielded glass silk cable ended by a male miniature connector.



## ■ Tolerances of the probe


TC	Measuring range Class 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters

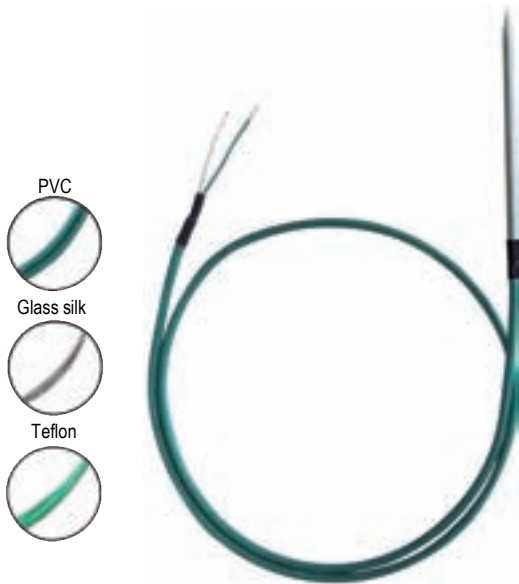


## Thermocouple penetration probe with cable

### SFP K

#### Probe features

- Thermocouple types T, J, K and N.
- Measuring range from **-40°C to +550°C**
- 316 L stainless steel sheath

#### Part numbers

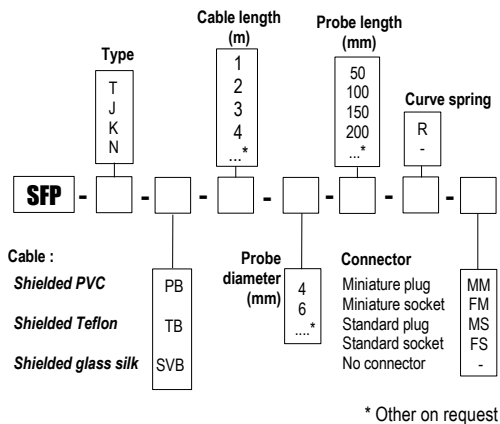


**Example : SFPK-PB-1-4-100-R-MM**  
 Model : Thermocouple type K. Stainless steel protective sheath 4 mm diameter, 100mm length with a shielded PVC cable, 1m long, with curve spring and miniature plug connector.  
 Measuring range from -40 to +105°C.

#### Technical features

- Operating temperature**..... from -40°C to +105°C for shielded PVC cable  
 from -40°C to +260°C for shielded T cable  
 from -40°C to +400°C for shielded SV cable  
 from -40°C to +550°C for shielded SV cable (T<sub>c</sub> K only)
- Accuracy for class 1**..... See "Tolerances" table
- Welding type**..... Ungrounded hot junction.
- Storage temperature**..... from -20°C to +80°C
- Output** ..... stripped wire, miniature plug or standard on request.
- Sheath**..... 316 L stainless steel, optional curve spring.

#### Probe dimension

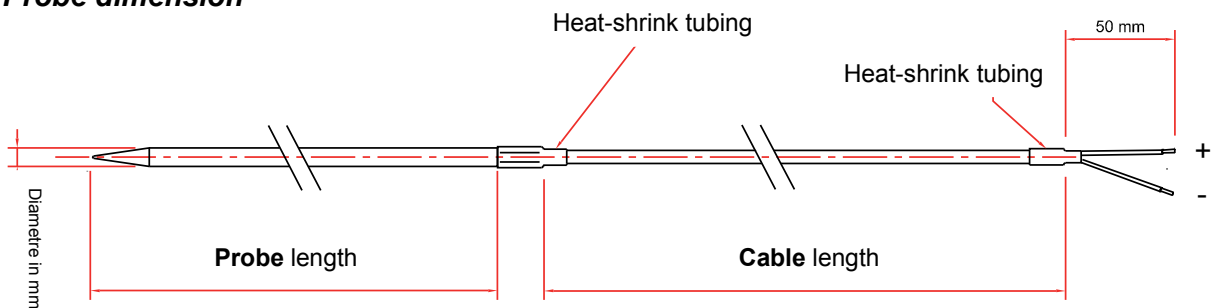



## ■ Tolerances


TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ$

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE

## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

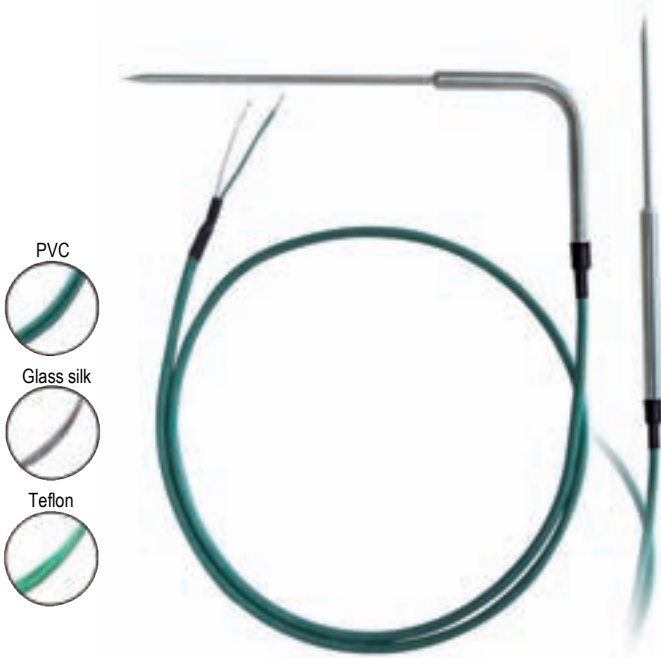


**Thermocouple temperature probe with handle to prick**

**SFPP K / SFPPC K  
SFPPD K / SFPPCD K**


■ **Probe features**

- Pricking temperature probe mounted on straight or angled handle
- Thermocouple types T, J, K and N.
- Measuring range from **-40°C to +550°C**

**Straight handle**

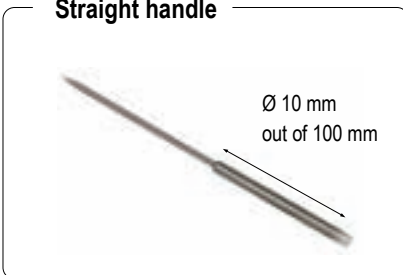

**Angled handle**

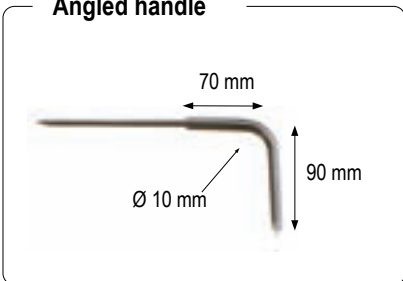

■ **Technical features**

- Working temperature**.....from -40°C to +105°C for shielded PVC output  
 from -40°C to +260°C for TB output  
 from -40°C to +400°C for SVB output  
 from -40°C to +550°C for SVB (Tc K only) output
- Accuracy for 1**.....See "Tolerances"
- Mounting of welding**.....Insulated hot welding
- Storage temperature**.....from -20°C to +80°C
- Output** .....stripped wires, miniature male connector or standard on request.
- Mounting of cable output**.....Output on cable or with stainless steel flexible 7 mmØ .  
 Water-resistant flexible on request as option.  
 Curve spring as option (unless stainless steel flexible output)
- Contact tip**.....4.5 or 6 mm Ø in 316 L stainless steel  
 Tapered tip  
 Handle : **Straight** 10 mm Ø and 100 mm length  
**Angled** at 90° and 90 mm length  
 Other on request.

**Water-resistant as option for use in wet or submerged places.**

Thermocouple

# SFPPK & SFPPKD

## Pricking cable probe with handle


• Probe with straight handle on cable



• Probe with straight handle on flexible




### ■ Dimensions

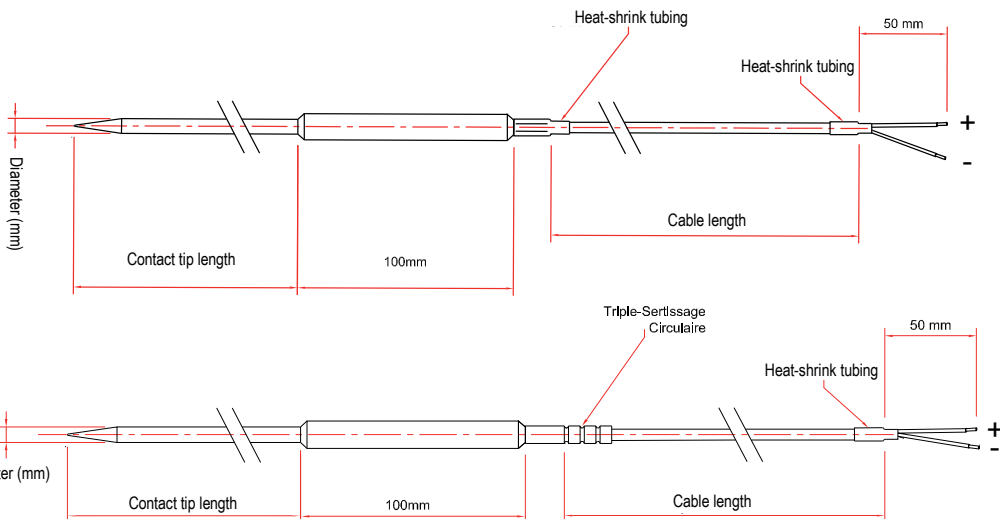

Optional :  
water-resistant

### ■ Part numbers

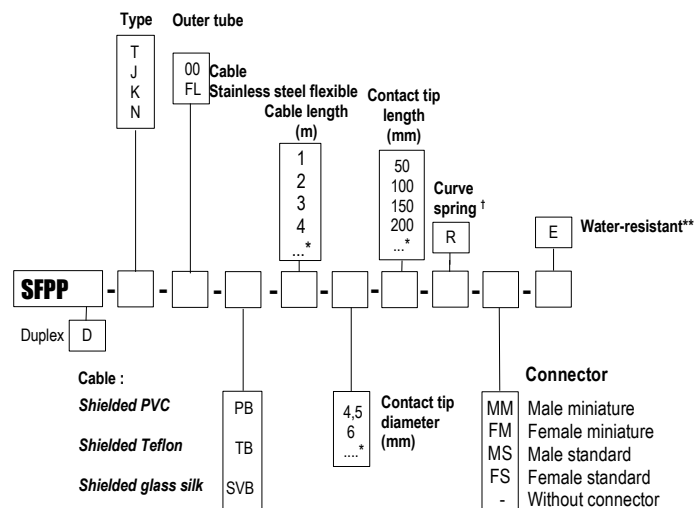

Example : SFPPK-00-TB-1-45-100-MM

Model : Thermocouple type K temperature probe, Outer tube in shielded Teflon cable of 1 m length. Stainless steel contact tip 4,5 mm Ø, to prick with straight handle of 100 mm length, without curve spring. Measuring range from -40 to +105°C.

\* Other dimension on request

† No curve spring on flexible output FL

\*\* E for submerged use according to use rules



## ■ Tolerances of the probe

TC	MEASURING RANGE CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters




# Thermocouple temperature sensor with T handle

## SFPPT K

### Probe features

- Thermocouple types T, J, K and N.
- Pricking temperature probe mounted on T handle.
- Measuring range (according to cable) : from **-40°C to +400°C**


### Part numbers

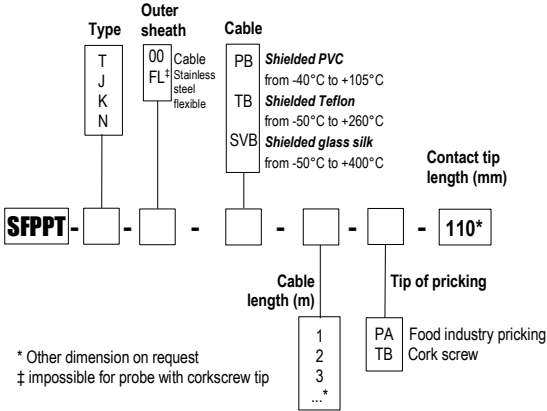


**Example : SFPPTK-00-P-2-PA-110**  
 Model : Type K thermocouple probe with insulated hot welding, outer sheath in PVC cable of 2 m length. Stainless steel contact tip Ø 4,5 mm for food industry pricking of 110 mm length with penetration tip of tube sinking type. **Measuring range from -40 to +105°C.**

### Dimensions

#### Food industry pricking probe

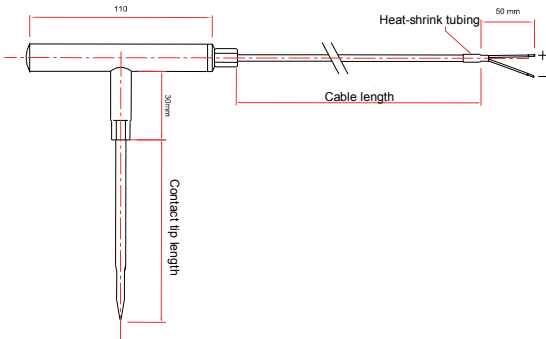


#### Cork screw tip probe

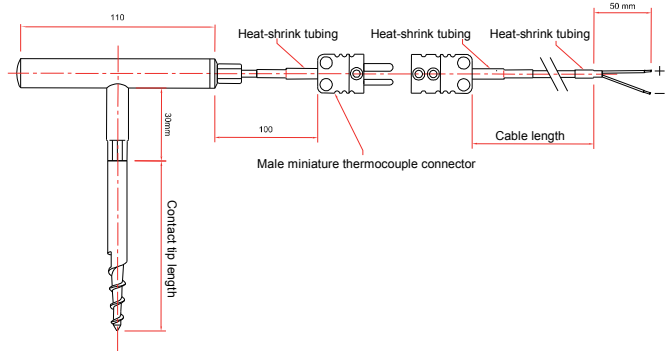

### Technical features

- Working temperature**.....from -40°C to +105°C for shielded PVC output  
 from -40°C to +260°C for TB output  
 from -40°C to +400°C for SVB (Tc J) output  
 from -40°C to +550°C for SVB (Tc K and N) output
- Accuracy for class 1**.....See "Tolerances" table
- Storage temperature**.....from -20°C to +80°C
- Mounting of cable output**.....Insulated hot welding mounting  
 With tip of food industry pricking, PE output unremovable.  
 With tip of cork screw pricking : compensated mini connector output .
- Contact tip**.....110 mm length in standard  
 4.5 or 8 mm Ø in 316 L stainless steel, selective length
- Tip of pricking**  
 Cork screw (to screw) : only 8 mm diameter for contact tip  
 Food industry pricking : contact tip diameter : 4.5 mm  
 Tube sinking diameter : 3 mm

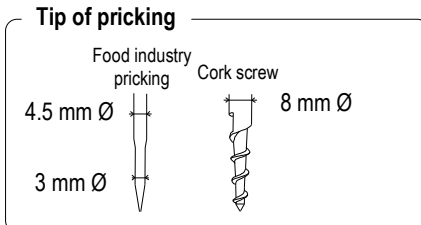

Thermocouple

## ■ Tolerances of the probe

TC	Measuring range Class 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

TYPE DE THERMOCOUPLE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters




**Thermocouple probe with magnetic mounting and cable output.**

**SFAI K**

- Thermocouple types T, J, K or N.
- Measuring range : from -40°C to +220°C.
- Mounting with magnet.

**Part number**


To order, just add the codes to complete the part number.

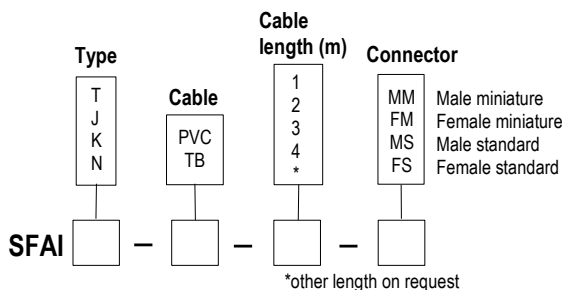

Example : SFAIK-PVC-1-MM

Model : Thermocouple type K with shielded PVC cable, 1m length finished with a miniature male connector.

**Probe dimensions**

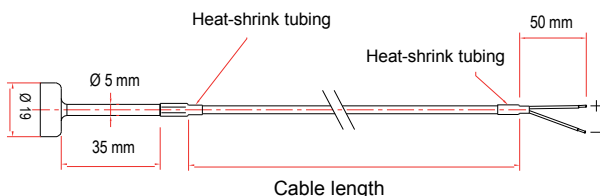

**Technical feature**

Working temperature.....For shielded PVC cable from -40°C to +105°C

For shielded Teflon cable from -40°C to +220°C

Accuracy for class 1.....See "Tolerances" table

Welding mounting.....Hot welding to the earth.

Storage temperature.....from -20°C to +80°C

Response time.....52 sec.

Magnet.....19 mm Ø, 8 mm height  
maximal traction : 3 kg  
other on request

Storage temperature.....from -20°C to +80°C

Output.....stripped wire, miniature plug or standard

**Tolerances of the probe**

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T° abs
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T° abs
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
S	From 0°C to +1600°C	From 0°C to +1100°C ± 1°C From 1100°C to 1600°C ± (1 + 0.003*(T°-1100))

Thermocouple



## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Fer	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chrome 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

**Thermocouple cable  
temperature sensor  
for measurement of contact by  
eyelet**


**SFO K**



**Probe features**

- Thermocouple types T, J, K and N.
- Measuring range from -40°C to +550°C

**Part numbers**

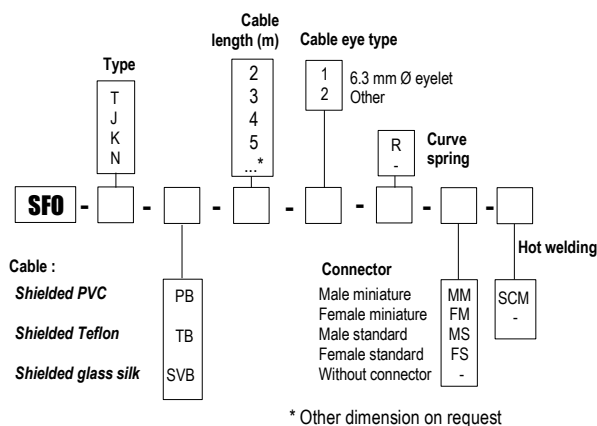

**Technical features**

- Working temperature**.....from -40°C to +105°C for shielded PVC output  
from -40°C to +260°C for TB output  
from -40°C to +400°C for SVB output  
from -40°C to +550°C for SVB (only Tc K) output
- Accuracy for class 1**.....See "Tolerances" table
- Mounting of welding** .....Insulated hot welding in standard  
Add SCM to part number for a mounting with hot welding to earth.
- Storage temperature**.....from -20°C to +80°C
- Output** .....stripped wire, miniature male connector or standard on request.
- Contact tip**.....14 x 12 mm copper eyelet, fixing by 6.3 mm Ø hole.  
316 L stainless steel tube output of 10 mm and 4,5 mm diameter.  
Water-resistant crimping with heat-shrink tubing (unless glass silk cable with simple crimping on stainless steel tube)  
Curve spring as option


**Tolerances of the probe**

TC	MEASURING RANGE CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T° abs
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T° abs
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs


Thermocouple

## ■ Dimensions

### • Front view

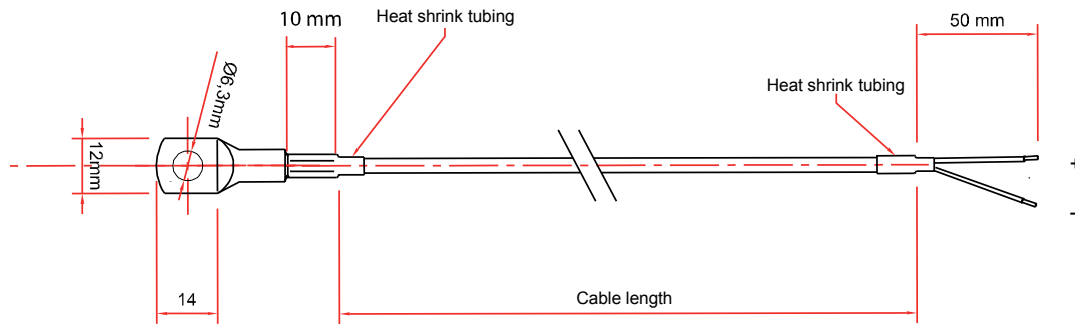

### • Side view



## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE


## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters



Supplied with adjustable ring of 100 mm Ø

■ **Part numbers**

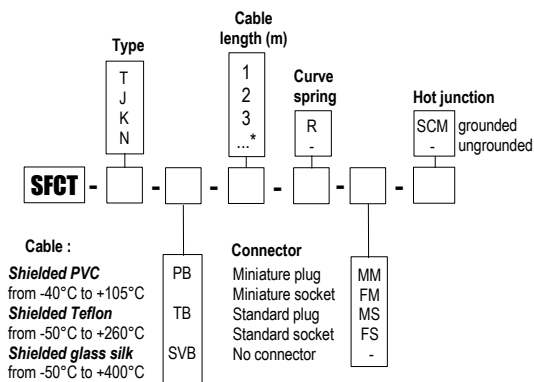

\* Other dimensions available on request

Example : SFCTK-P-3-R-MM

Model : Thermocouple type K with ungrounded hot junction. Contact probe on PVC cable, 3m long, with curve spring and miniature plug connector. Measuring range from -40 to +105°C.

■ **SFCT K**


■ **Probe feature**

- Thermocouple types T, J, K and N.
- Measuring range from **-40°C to +550°C**
- With contact end for pipe (all diameters)

■ **Technical feature**

- Operating temperature**..... from -40°C to +105°C for shielded PVC cable  
 from -40°C to +260°C for shielded T cable  
 from -40°C to +400°C for shielded SV cable  
 from -40°C to +550°C for shielded SV cable (Tc K only)
- Accuracy for class 1**..... See "Tolerances" table
- Welding type**..... Default ungrounded hot junction  
 For grounded hot junction, SCM must be added at the end of the part number.
- Storage temperature**..... from -20°C to +80°C
- Contact tip**..... 40 x 16 x 8,5 mm  
 V shape  
 screw fastener  
 made of AU4G (aluminium)
- Connection**..... supplied with stainless steel adjustable ring for DN 100. Other adjustable ring available on request

■ **Probe dimensions**

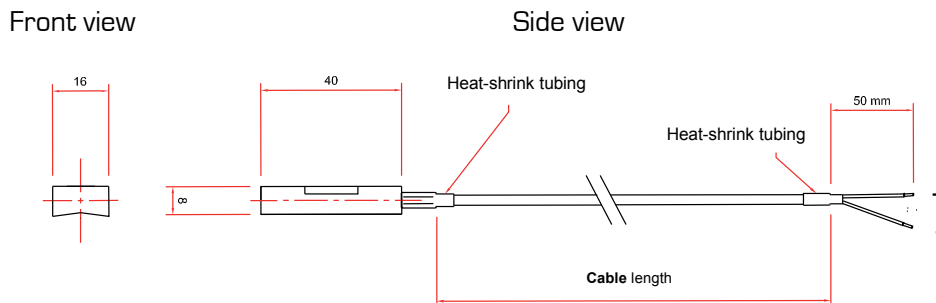

Thermocouple

## ■ Tolerances

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ$

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE


## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters




## Cable thermocouple temperature sensor for surface contact

### SFCS K

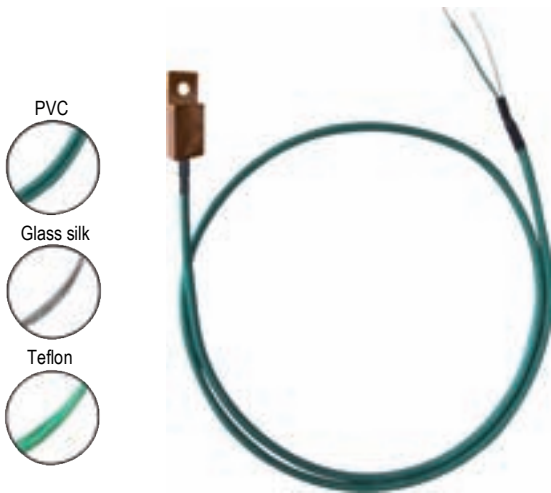

#### Part numbers

To order, just add the codes to complete the part number.

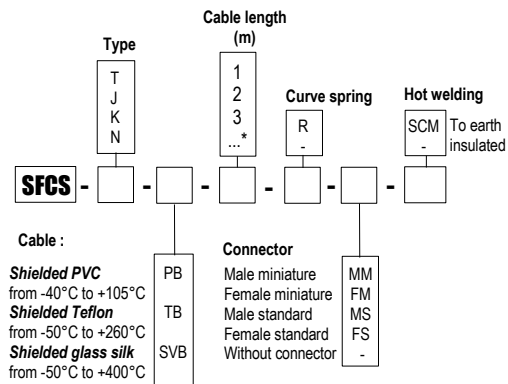

\* Other dimension on request

Example : SFCSK-P-3-R-MM

Model : K type thermocouple temperature probe with insulated hot welding. Contact tip mounted on PVC cable 3m length with a curve spring and with male miniature connector on the end.

Measuring range from -40 to +105°C.

#### Probe features

- Thermocouple types T, J, K and N.
- Measuring range from -40°C to +550°C
- Mounting with base of surface.

#### Technical features

Working temperature.....from -40°C to +105°C for PB output  
from -40°C to +260°C for TB output  
from -40°C to +400°C for SVB output  
from -40°C to +550°C for SVB (Tc K) output

Accuracy for class 1.....See "Tolerances" table

Mounting of welding.....Insulated hot welding in standard  
Add SCM to part number for a mounting with hot welding to earth.

Storage temperature.....from -20°C to +80°C


Output.....stripped wires, male miniature connector or standard. Other on request.

Base.....40 x 16 x 7,5 mm  
hole of 6,3 mm Ø  
Copper matter


Thermocouple

#### Dimensions

Top view

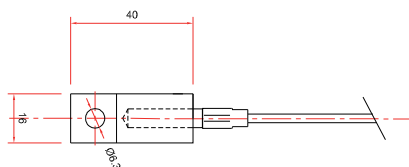

Side view

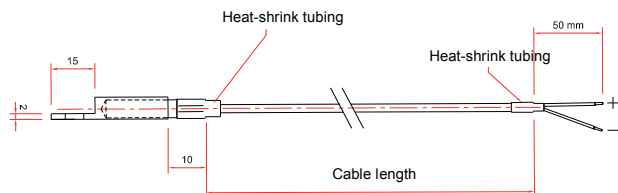

## ■ Tolerances of the probe

TC	Measuring range Class 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters




## Cable thermocouple temperature sensor at bayonet

### SFBA K

#### Part numbers

To order, just add the codes to complete the part number.

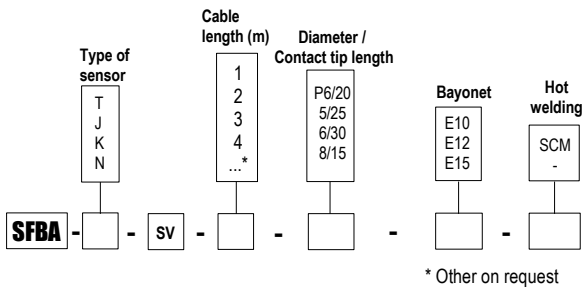


Example : SFBAK-SV-3-630-E12-SCM

Model : Thermocouple type K temperature sensor at bayonet welded to earth. Contact tip 6mm Ø and 30mm length mounted on glass silk cable 3 m length. Bayonet for 12 mm base.

Measuring range from -50 to +400°C.

#### Dimensions

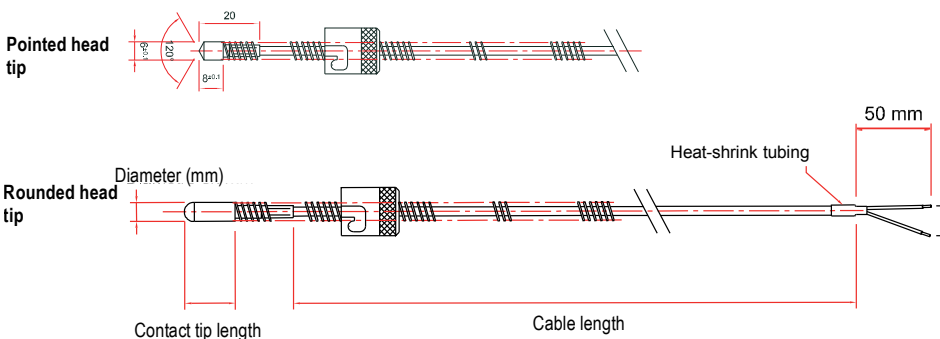

#### Sensor features

- Thermocouple types T, J, K, N and S.
- Measuring range from **-50°C to +400°C**
- Mounting stainless steel contact tip 316 L

#### Technical features

Working temperature.....from -40°C to +350°C for Tc T  
from -40°C to +400°C for Tc J  
from -40°C to +550°C for Tc K

Accuracy for class 1.....See "Tolerances" table

Storage temperature.....from -20°C to +80°C

Contact tip.....316 L stainless steel.  
5/25 : 5 mm Ø and 25 mm length  
6/30 : 6 mm Ø and 30 mm length  
8/15 : 8 mm Ø and 15 mm length  
P6/20 : 6 mm Ø and 8 mm length

Cable.....output by shielded stainless steel glass silk cable.  
2 conductors of 0,22 mm<sup>2</sup>.  
Measuring range : from -50°C to +400°C

Bayonet.....bayonet fitting (2 spins)  
Nickel faced brass , for base of 10, 12 or 14 mm Ø  
To screw on spring of 200 mm.

Thermocouple



## ■ Tolerances of the probe

TC	Measuring range Class 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)


- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard connectors panel
- Miniature or standard connectors panel
- Extension lead
- Converters



***K thermocouple temperature sensor for measurement of surface with moving parts***

**SFCSM K**

■ **Dimensions**

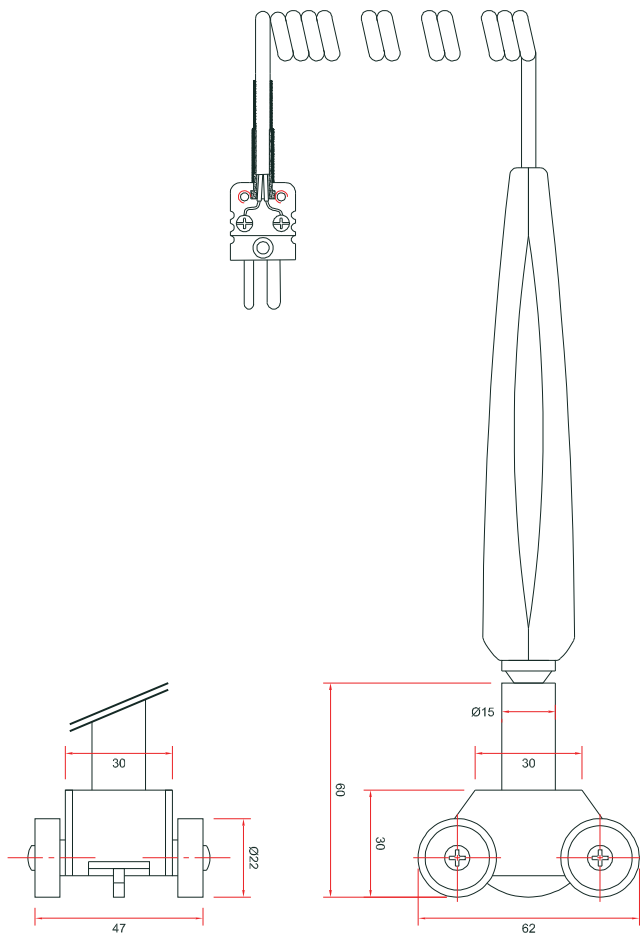

■ **Probe features**

- Thermocouple type K.
- Measuring range from **-40°C to +500°C**
- Response time very fast.

■ **Technical features**

- Working temperature**.....from -40°C to +500°C (only for the trolley)
- Accuracy for class 1**.....See "Tolerances" table
- Mounting of welding**.....Insulated hot welding in standard
- Storage temperature**.....from -20°C to +80°C
- Handle**.....ABS, 141 mm length, from -40 °C to +85 °C
- Output** .....by PVC coiled cable , 200 mm length  
1800 mm length stretched  
Temperature maxi 105 °C  
Male miniature connector (in standard)

■ **Tolerances of the probe**

TC	MEASURING RANGE CLASS 1	TOLERANCE
K	From -40 °C to +500 °C	From -40°C to +375°C ± 1.5°C From 375°C to 500°C ± 0.004 x T°abs

Thermocouple



**Part 4 : Head thermocouple**



**TB K**  
with aluminium connection head.....p 147



**TBEI K**  
with interchangeable probe system.....p 149



**TBAJ K**  
with ambient tip.....p 151



**TBRD K**  
with offset fitting.....p 153



**TBC K**  
with aluminium connection head.....p 155



**TBCT K/TMCT K**  
for contact duct.....p 159



**TBAL K**  
for high temperature.....p 163



**TBAL S**  
for high temperature.....p 164



**TBAR K**  
with heat-resisting steel protector.....p 165



**TBB K**  
with mounting flange.....p 167



**TBRC K**  
with clamp fitting.....p 169



**Fermenting room**  
grip handle thermocouple probe.....p 171



**Compost**  
thermocouple probe.....p 173








## Thermocouple with aluminium connection head

### TBK/ TBKI – TBDK / TBDKI

- Thermocouple type T, J, K or N.
- Measuring range from **-40°C** to **+1000°C**
- With or without compression fitting

#### Part numbers stainless steel sheath 400°C max.


To order, just add the codes to complete the part number.

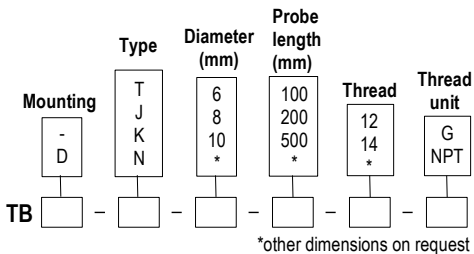

Example : TBD-T-6-100-12-G

Model : Thermocouple type T with connection head. Sheath of 100 mm and 6 mm Ø with compression fitting ½" G. Mounting of multipair wires.


#### Part numbers mineral insulated sheath 1000°C max.

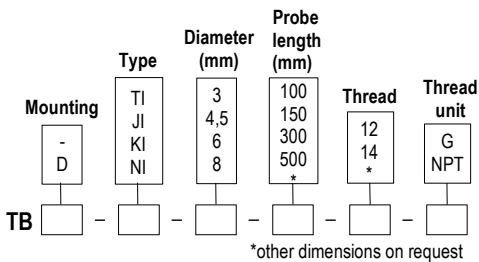

Example : TBD-TI-6-100-12-G

Model : Thermocouple type T with connection head. Mineral insulated sheath of 100 mm and 6 mm Ø with compression fitting ½" G. Mounting of multipair wires.

#### Dimensions

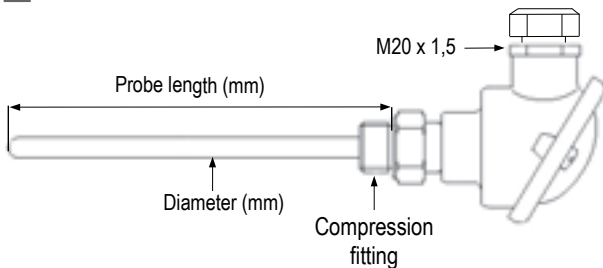

#### Technical features

- Working temperature**..... For **TBK** category  
from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K and N  
For **TBKI** category  
from -40°C to +350°C for Tc T  
from -40°C to +750°C for Tc J  
from -40°C to +1000°C for Tc K and Tc N
- Accuracy for class 1**..... See "Tolerances" table
- Type of welding**..... Ungrounded or grounded hot junction  
Single pair or multipair wires (2 x 2 wires).
- Sheath**..... Inconel 600 mineral insulated or 316 L stainless steel for TB-I and TBD-I category  
316 L stainless steel probe sheathed magnesium oxide construction for TB and TBD category
- Compression fitting**..... 316 L stainless steel
- Thread**..... With or without compression fitting ½", ¼" G or NPT plug
- Electrical connection**..... Ceramic block junction 2 or 4 contacts.  
Transmitter as option.
- Connection head**..... Aluminium alloy (Max. 120°C)  
Cable gland : M20/150  
IP65 protection.
- Storage temperature**..... from -20°C to +80°C

#### Tolerances

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°


Thermocouple

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE

## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

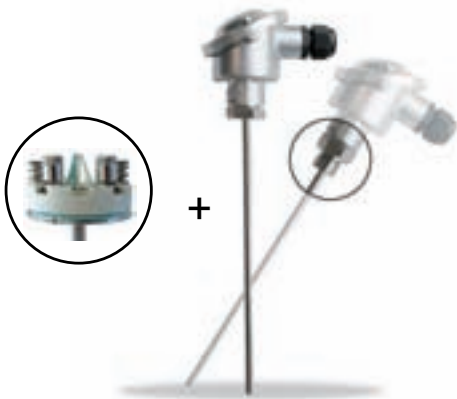


**Thermocouple sensor with standard connection head with interchangeable probe system**

**TBEI K – TBEID K**

- Thermocouple T, J, K and N.
- Operating temperature from **-40°C to +400°C**
- With or without compression fitting

**Part numbers for stainless steel sheath 400°C max.**

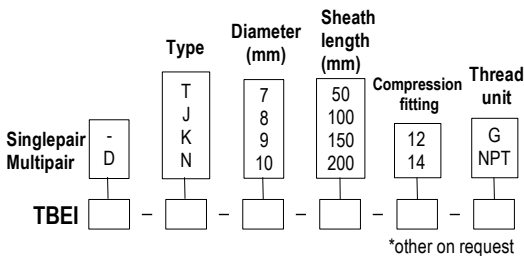


**Example : TBEID-T-7-100-12-G**


**Model :** Thermocouple T with a sheath of 100 mm length and 7 mm Ø. Compression fitting 1/2 G. Measurement insert 4 mm Ø and 140 mm length with multipair wires.

**Dimensions**

- Probe

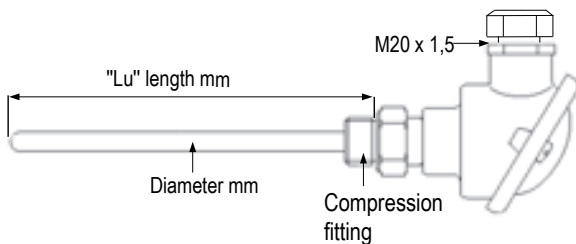

- Internal interchangeable probe system

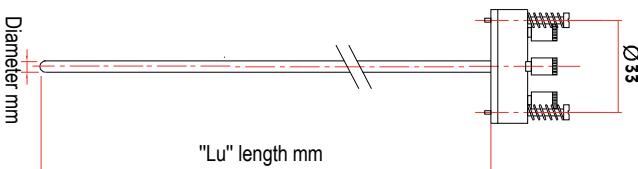

**Technical features**

**Operating temperature**..... from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K and N

**Accuracy for class 1**..... See "Tolerances" table

**Type of welding**..... Ungrounded or ungrounded hot junction.  
Singlepair or 2x2 multipair.

**Sheath**..... 316 L stainless steel.

**Interchangeable system**..... 316 L stainless steel.

**Diameter :** according to external sheath Ø

Interchangeable system Ø	Ø min. of sheath
4 mm	7 mm
5 mm	8 mm
6 mm	9 mm
7 mm	10 mm

**LU length :** length of sheath + 40 mm

**Compression fitting**..... 316 L stainless steel

**Thread**..... With or without 1/2, 1/4, Gaz or NPT plug

**Electrical connection**..... Terminal block (2 or 4 contacts)  
Optional transmitter.

**Connection head**..... Aluminium alloy  
cable gland : M20 x 1.5  
IP65 protection

**Storage temperature**..... from -20°C to +80°C

**Tolerances**

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°

Thermocouple






# Thermocouple interchangeable probe system

## EI K – EID K

- Thermocouple T, J, K and N.
- Working temperature from **-40°C to +400°C**
- With or without compression fitting

### Part numbers for stainless steel sheath 400°C max.

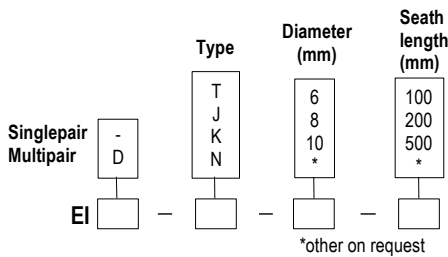


LU length : length of sheath + 40 mm

**Example : TBEID-T-7-100-12-G**

**Model :** interchangeable probe system type T with sheath of 100 mm and a 7 mm Ø with a ½ G compression fitting. Multipair wires.

### Dimensions

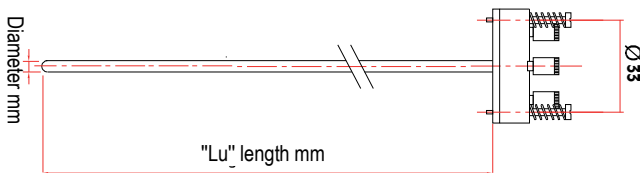

### Technical features

**Operating temperature**..... from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K and N

**Accuracy for class 1**..... See "Tolerances" table

**Welding type**..... Ungrounded or ungrounded hot junction.  
Singlepair or 2x2 multipair.

**Sheath**..... 316 L stainless steel.

**Interchangeable system**..... 316 L stainless steel.

**Diameter** : according to external sheath Ø

Interchangeable system Ø mm	Ø min. of sheath
5 mm	7 mm
6 mm	8 mm
7 mm	9 mm
	10 mm

**LU length** : length of sheath + 40 mm

**Electrical connection**..... Terminal block (2 or 4 contacts)  
Optional transmitter.  
With or without terminal block DIN Ø 42 mm mounted. 33 mm centre.

**Storage temperature**..... from -20°C to +80°C

### Tolerances

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°

Ref. FTang – TBEIK - 11/07 A – We reserve the right to modify the characteristics of our products without notice.

For most common thermocouple types and accessories, See page 152




**Thermocouple sensor with standard connection head and ambient tip**

**TBAJ K/ TBAJ KI**

- Thermocouple types T, J, K and N.
- Measuring range from **0°C to +400°C**
- With or without compression fitting


**Part numbers**

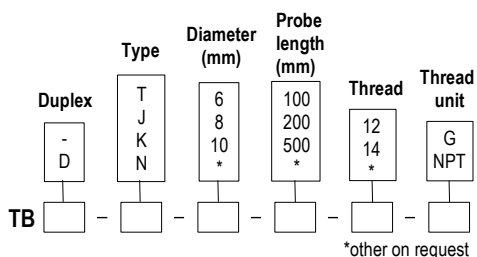

Example : TBD-T-6-100-12-G

Model : Thermocouple T in a sheath of 6 mm Ø and 100 mm length with a ½G compression fitting. Wire multipair mounting.

**Dimensions**

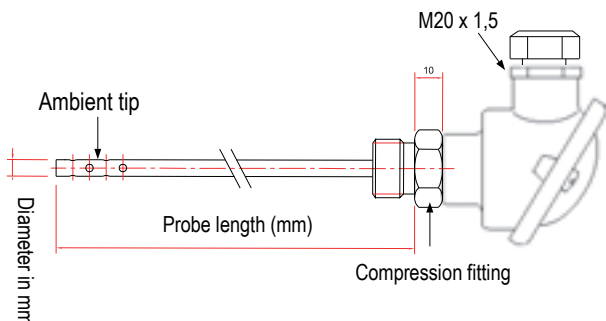

**Transmitter features**

- Operating temperature**..... For **TBK** type  
from 0°C to +350°C for Tc T  
from 0°C to +400°C for J, K and N
- Accuracy for class 1**..... See "Tolerances" table
- Welding type**..... Ungrounded hot junction.  
Singlepair or 2x2 multipair.
- Sheath**..... 316 L stainless steel. Ambient end of 20 mm.  
6 or 8 mm Ø or other on request
- Compression fitting**..... 316 L stainless steel
- Thread**..... With or without ½, ¾,  
Gaz or NPT plug
- Electrical connection**..... with or without terminal block  
transmitter 4/20mA 0/10V as option
- Connection head**..... Aluminium alloy  
cable gland : M20 x 1.5  
IP65 protection
- Storage temperature**..... from 0°C to +80°C

**Tolerances**

TC	Measuring range CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T°
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T°
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T°

Thermocouple

## ■ Most common thermocouple types

THERMOCOUPLE TYPES	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Chromel	Alumel	Ext. color + = GREEN, - = WHITE
T	Copper	Constantan	Ext. color + = BROWN, - = WHITE
J	Iron	Constantan	Ext. color + = BLACK, - = WHITE
N	Nicrosil	Nisil	Ext. color + = PINK, - = WHITE
R	Platinum-13% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-10% Rhodium	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-30%Rhodium	Platinum- 6%Rhodium	Ext. color + = GREY, - = WHITE

## ■ Accessories (See Datasheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters



**Industrial thermocouple temperature sensor with aluminium connection head and with offset fitting**

**TBRD K/ TBRD KI – TBRDD K / TBRDD KI**

- Thermocouple types T, J, K and N.
- Measuring range from **-40°C to +1000°C**
- Mounting with offset fitting

**Stainless steel contact tip max 400°C part numbers**

To order, just add the codes to complete the part number.

Duplex	Type	Effective length diameter (mm)	Effective length (mm)	Fitting	Thread unit	Height adjustment diameter (mm)	Height adjustment length (mm)
-	T J K N	6 8 10 *	50 100 150 200 *	12 14 *	G NPT	6 8 10 12	50 100 150 200

TBRD [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

\*other on request

**Example : TBRD-T-6-100-12-G-6-50**

**Model :** Thermocouple sensor type T at head with contact tip of 100 mm effective length and 6 mm Ø and height adjustment length of 50 mm in 6 mm Ø . Contact tip with ½ G compression fitting.

**Lined contact tip max 1000°C part numbers**

Duplex	Type	Effective length diameter (mm)	Effective length (mm)	Fitting	Thread unit	Height adjustment diameter (mm)	Height adjustment length (mm)
-	TI JI KI NI	3 4,5 6 8	150 300 500 *	12 14 *	G NPT	6 8 10 12	50 100 150 200


TBRD [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

\*other on request

**Example : TBRD-KI-6-150-12-G-6-50**

**Model :** Thermocouple sensor type K in inconel at head with contact tip of 150 mm effective length and 6 mm Ø and height adjustment length of 50 mm in 6 mm Ø . Contact tip with ½ G compression fitting.

**Dimensions**

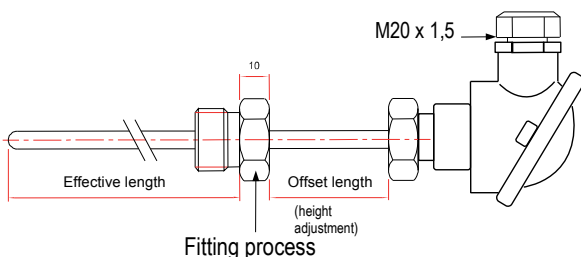

**Technical features**

**Working temperature.....**For **TBK series**  
from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K et N

For **TBKI series**  
from -40°C to +350°C for Tc T  
from -40°C to +750°C for Tc J  
from -40°C to +1000°C for Tc K and Tc N

**Recommended temperature.....**According to contact tip Ø in inconel 600  
from 0.5 to 1 mm Ø : up to 300°C  
from 1.5 to 2 mm Ø : up to 750°C  
3 mm Ø : up to 900°C  
from 4.5 to 8 mm Ø : up to 1000°C



**Accuracy for class 1.....**See "Tolerances" table

**Mounting of welding.....**Insulated or to earth hot welding  
Single pair or 2x2 wires multipair mounting.

**Contact tip.....**For **Effective length**  
Stainless steel 316 L or lined inconel 600 for I series  
Compacted magnesia and stainless steel 316 L for TBRDK-TBRDDK series

For **Offset length**  
Stainless steel 316 L

**Compression fitting.....**Stainless steel 316 L

**Thread.....**Fitting ½", ¼" G or NPT plug

**Electrical connection.....**Ceramic block junction 2 or 4 contacts.  
Transmitter as option.

**Connection head.....**Aluminium alloy (max 120°C)  
Cable gland : M20/150  
IP 65 protection.

**Storage temperature.....**from -20°C to +80°C

Thermocouple

## ■ Tolerances

TC	MEASURING RANGE CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters



**Thermocouple temperature sensor  
with aluminium industrial connection head  
stainless steel angled or lined  
inconel with or without fitting**

## Type TBC K and TBCR K

**TBC K – TBCD K – TBC KI – TBCD KI  
TBCR K – TBCRD K – TBCR KI – TBCRD KI**


### ■ General features

- Thermocouple types T, J, K and N
- Measuring range from **-40°C to +1000°C**
- Mounting with stainless steel contact tip 316 L or inconel 600
- Smooth or screwing mounting

### ■ Technical features

**Working temperature**.....*For TBCK series*  
from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K et N  
*For TBCKI series*  
from -40°C to +350°C for Tc T  
from -40°C to +750°C for Tc J  
from -40°C to +1000°C for Tc K and Tc N

**Recommended temperature**.....*According to contact tip Ø in inconel 600*  
from 0.5 to 1 mm Ø : up to 300°C  
from 1.5 to 2 mm Ø : up to 750°C  
3 mm Ø : up to 900°C  
from 4.5 to 8 mm Ø : up to 1000°C



**Accuracy for class 1**.....See "Tolerances" table

**Mounting of welding**.....Insulated or to earth hot welding  
Single pair or 2x2 wires multipair mounting.

**Contact tip**.....Stainless steel 316 L or lined inconel 600 for I series  
Compacted magnesia and stainless steel 316 L for TBC and TBCD series  
Angled at 90° (other on request)

**Compression fitting**.....Stainless steel 316 L

**Smooth mounting without fitting** : put anything

**Mounting with fitting on L2 (See schema)** : 12 or 14 corresponding to fitting ½"G and ¼"G.

**Mounting with fitting on L2 (See schema)** : 12L1 or 14L1 corresponding to fitting ½"G and ¼"G.



No 4 wires mounting for contact tip 4mm ø.

**Thread**.....With or without fitting ½", ¼" G or NPT plug.

**Electrical connection**.....Ceramic block junction 2 or 4 contacts. Transmitter as option.

**Connection head**.....Aluminium alloy(max 120°C)  
Cable gland : M20/150  
IP65 protection

**Storage temperature**.....from -20°C to +80°C

Thermocouple


# TBC K & TBC KI

Stainless steel angled or lined inconel with or without multipair mounting probe



## ■ Dimensions

L1 mini : according to Ø  
 L2 mini : according to Ø  
 Bending radius : 15 mm Ø 6 mm  
 24 mm Ø 8 et 10 mm

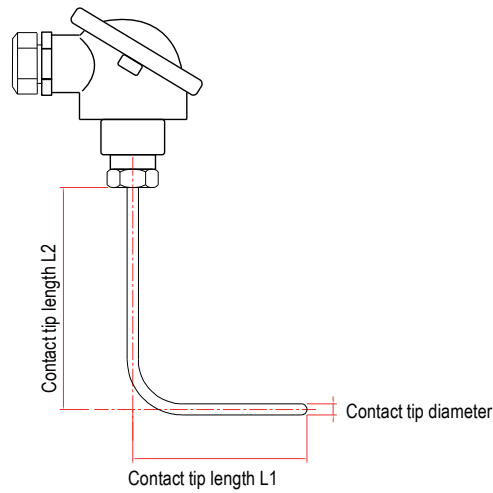

## ■ Part numbers

### • TBC K – Stainless steel contact tip -

Duplex	Type	Diameter (mm)	L1 Contact tip (mm)	L2 Contact tip (mm)	Angle	Welding
D	T J K N	6 8 10 12	50 100 150 200*	50 100 150 200*	90	- Insulated SCM To earth

\*other on request

Example : TBCJ-8-100-100-90-SCM

Model : Thermocouple sensor type J welded to earth with stainless steel contact tip 8 mm Ø angled at 90° and L1 and L2 lengths 100 mm.

### • TBC KI – Inconel contact tip -

Duplex	Type	Diameter (mm)	L1 Contact tip (mm)	L2 Contact tip (mm)	Angle	Welding
D	TI JI KI NI	3 4.5 6 8	50 100 150 200*	50 100 150 200*	90	- Insulated SCM To earth

\*other on request

Example : TBCJI-8-100-100-90-SCM

Model : Thermocouple sensor type J welded to earth with inconel contact tip 8 mm Ø angled at 90° and L1 and L2 lengths 100 mm.


# TBCR K & TBCR KI

Stainless steel angled or lined inconel with fitting and with or without multipair mounting probe




## ■ Dimensions

• With fitting on L1

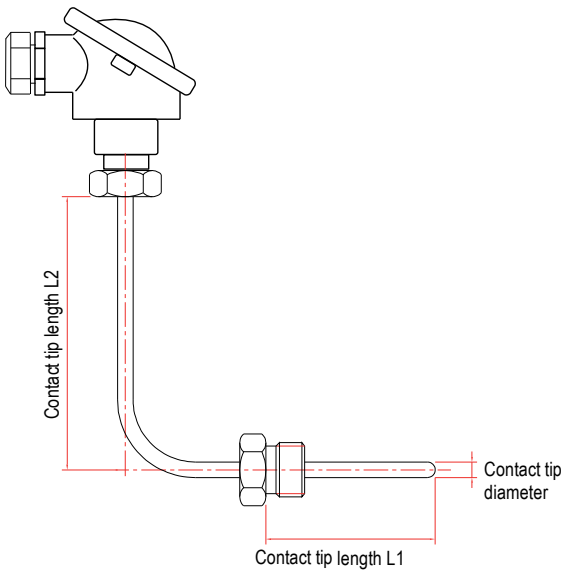

• With fitting on L2

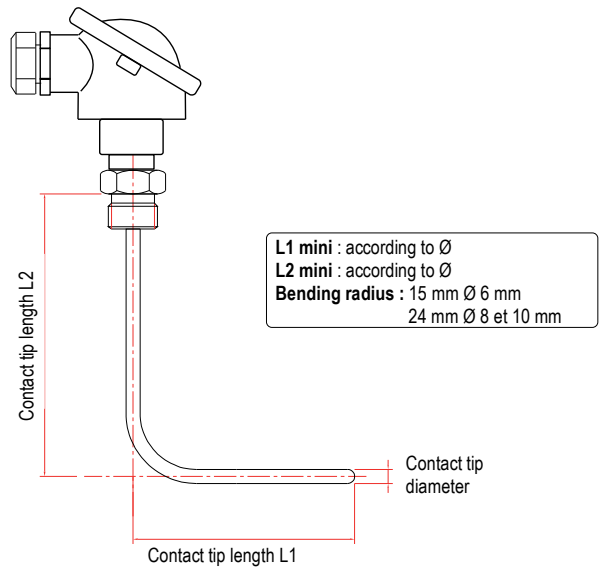

## ■ Part numbers

• TBCR K - Stainless steel contact tip -

Duplex	Type	Diameter (mm)	Contact tip (mm)		Fitting	Thread	Angle	Welding
			L1	L2				
D	T J K N	6 8 10 12	50 100 150 200 *	50 100 150 200 *	12 14 12L1 14L1	G NPT	90	- SCM Insulated To earth

TBCR [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

\*other on request

Example : TBCRJ-8-100-100-12-G-90-SCM

Model : Thermocouple sensor type J welded to earth with stainless steel contact tip 8 mm Ø angled at 90° and L1 and L2 lengths 100 mm with fitting ½G on L2.

• TBCR KI - Inconel contact tip -

Duplex	Type	Diameter (mm)	Contact tip (mm)		Fitting	Thread	Angle	Welding
			L1	L2				
D	TI JI KI NI	3 4.5 6 8	50 100 150 200 *	50 100 150 200 *	12 14 12L1 14L1	G NPT	90	- SCM Insulated To earth

TBCR [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ] - [ ]

\*other on request

Example : TBCRJI-8-100-100-12-G-90-SCM

Model : Thermocouple sensor type J welded to earth with inconel contact tip 8 mm Ø angled at 90° and L1 and L2 lengths 100 mm, with fitting ½G on L2.

Thermocouple



## ■ Tolerances

TC	MEASURING RANGE CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

*Temperature sensor  
with head for contact duct*



Supplied with securing band for DN 100 duct

**TBCT K / TBCTD K  
TMCT K / TMCTD K**

■ **General features**

- Thermocouple types T, J, K and N.
- Measuring range **from -40°C to +400°C**
- Mounting with base for all diameter pipes.

■ **Technical features**

<b>Working temperature</b> .....	from -40°C to +350°C for Tc T from -40°C to +400°C for J, K et N
<b>Accuracy</b> .....	See "Tolerances" table
<b>Mounting of welding</b> .....	Insulated or to earth hot welding Single pair or 2x2 wires multipair mounting
<b>Duct base</b> .....	40 x 16 x 8,5 mm V-section Fixing by needle screw AU4G material (aluminium)
<b>Fitting</b> .....	supplied with a stainless steel collar for DN 100 Other collar on request
<b>Electrical connection</b> .....	with or without terminal block transmitter 4/20 mA as option
<b>Connection head</b> .....	Aluminium alloy Cable gland : M20 x 1,5 IP protection
<b>Height of clearance</b> .....	45 mm
<b>Storage temperature</b> .....	from -20°C to +80°C


Thermocouple

# TBCT K & TBCTD K


Temperature sensor with **standard** head and contact for pipes

## ■ Dimensions


- Side view

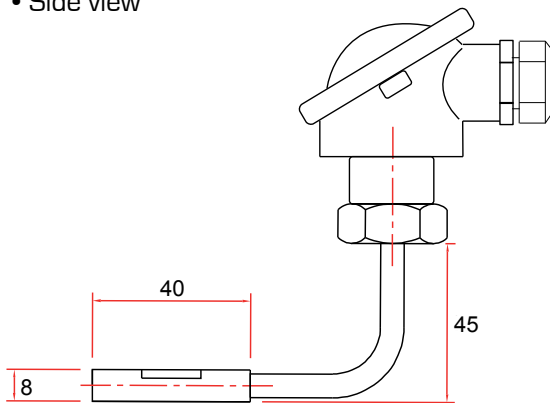

- Front view



## ■ Part numbers



Example : TBCTD-T-45


Model : Thermocouple sensor type T, clearance of the head at 45°. Mounting of wires in multipair.

# TMCT K & TMCTD K


Temperature sensor with **miniature** head and contact for pipes

## ■ Dimensions


- Side view

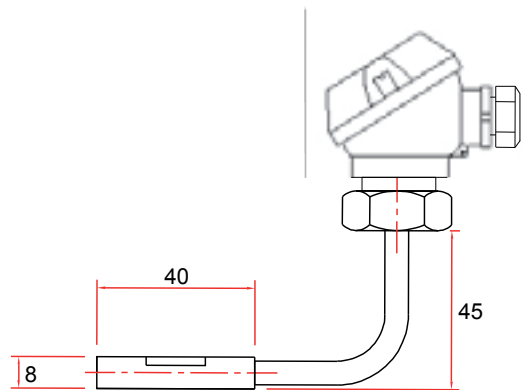

- Front view



## ■ Part numbers



Example : TMCT-T-45

Model : Thermocouple sensor type T, clearance of the head at 45°.

## Tolerances

TC	MEASURING RANGE CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C $\pm 0.5^\circ\text{C}$ From 125°C to +350°C $\pm 0.004 \times T^\circ\text{abs}$
J	From -40°C to +750°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 750°C $\pm 0.004 \times T^\circ\text{abs}$
K	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$
N	From -40°C to +1000°C	From -40°C to +375°C $\pm 1.5^\circ\text{C}$ From 375°C to 1000°C $\pm 0.004 \times T^\circ\text{abs}$

## Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters





1150°C




**Thermocouple K sensor  
for high temperature  
with ceramic protection .**

## TBAL K / TBALD K

- Thermocouple K.
- Working temperature : up to +1150°C.
- Mounting with ceramic sheath.


### Part numbers

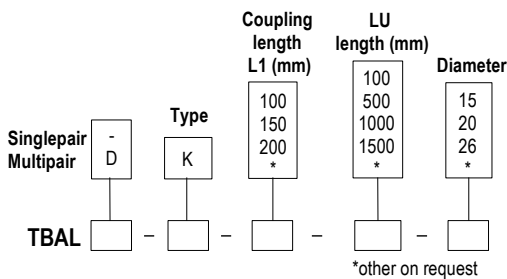

Example : TBAL-K-100-500-15

Model : Thermocouple type K, sheath of 15 mm Ø with a coupling of 100 mm length and a ceramic of 400 mm length. LU is 500 mm.

### Dimensions

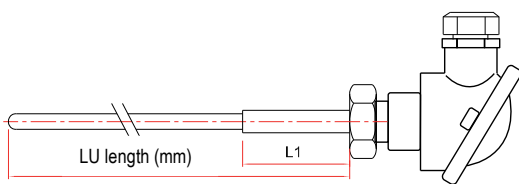

### Accessories (See related FT)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

### Technical features

Maximum operating temperature ..+1150°C

Accuracy..... ± 0,0075 l t l

Sheath..... Coupling 21,3 mm Ø  
(Customized length)

Watertight refractory ceramic sheath  
(CRE 610)

Standard 15 mm Ø (Other on request)  
(Customized length)

Mounting..... Wires in ceramic pearls

couple of wires Ø 2.9 mm (singlepair)  
or Ø 2.3 mm (multipair)  
(Other on request)

Connection head..... Aluminium alloy (120°C max)  
steel cable gland : M20 x 150  
IP54 protection

Storage temperature..... from -20°C to +80°C

### Tolerances

TC	Measuring range Class 1	Tolerance
K	from -40°C to +1000°C	from -40°C to +375°C ± 1.5°C from 375°C to 1000°C ± 0.004 x T° abs

### Most common thermocouple types

Thermocouple type	+ conductor	- conductor	Color of compensating cable
K	Chromel	Alumel	Ext. color += green, - = white

Ref. FTang - TBALK-11/07 A - We reserve the right to modify the characteristics of our products without notice.

Thermocouple



1600°C




**Thermocouple S or B sensor for high temperature with ceramic protection.**

## TBAL S / TBALD S

- Thermocouple S or B.
- Measuring range : up to +1600°C.
- Mounting with alumina sheath

### Part numbers


To order, just add the codes to complete the part number.

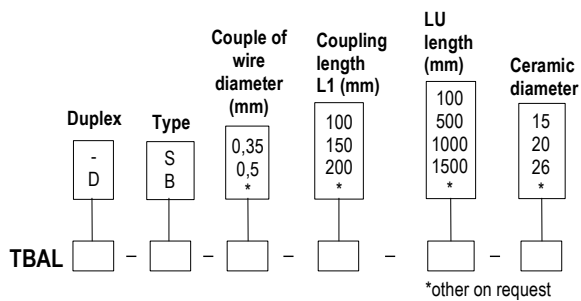

**Example :** TBAL-S-35-100-500-15

**Model :** Thermocouple type S, with a couple of wire of 0.35 mm Ø. Contact tip diameter 15 mm with coupling of 100 mm length and ceramic of 400 mm length. LU is 500 mm.

### Dimensions

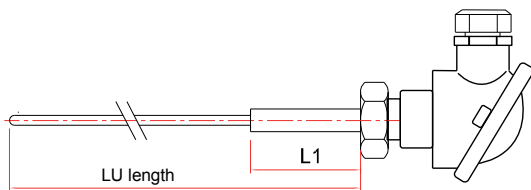

### Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

### Technical features

**Maximum operating temperature...**+1600°C

**Accuracy.....**± 0,0025 | t |

**Contact tip.....**Coupling Ø according to ceramic sheath (customized length)  
Pure APF 710 sintered alumina sheath  
Customized Ø according to application  
Couple of wires 0,35 or 0,5 mm Ø

**Connection head.....**Aluminium alloy (120°C max)  
Steel cable gland : M20 x 150  
IP 54 protection

**Storage temperature.....**from -20°C to +80°C

### Tolerances of the probe

TC	Measuring range Class1	Tolerance
S	From 0°C to +1600°C	From 0 to +1100°C ± 1°C From 1100°C to 1600°C ± (1+0.003*(T°-1100))
B	From 0°C to +1700°C	From 600°C to 1700°C ± 0.0025 x T° abs

### Most common thermocouple types

Thermocouple type	+ conductor	- conductor	Color of compensating cable
S	Platinum- Rhodium 10%	Platinum	Ext. color + = orange, - = white
B	Platinum- Rhodium 30%	Platinum- Rhodium 6%	Ext color + = grey, - = white

Ref. FTang - TBALS - 11/07 A - RCS (24) Périgueux B349 282 095 Non-contractual document - We reserve the right to modify the characteristics of our products without prior notice.

1150°C




**Thermocouple temperature sensor with heat-resisting steel protector**

**TBAR K / TBARD K**

- Thermocouple K and N.
- Maximal temperature +1150°C

**Part numbers**


To order, just add the codes to complete the part number.

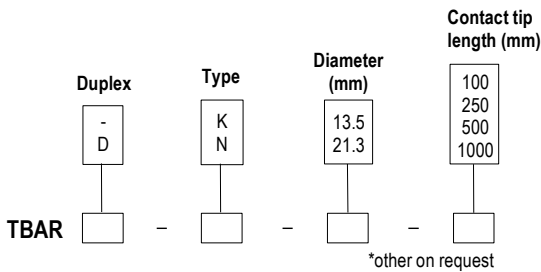

Example : TBARD-K-213-100

Model : Head thermocouple type K with contact tip of 100 mm length and 21.3 mm Ø. Multi pair mounting of wires.

**Dimensions**

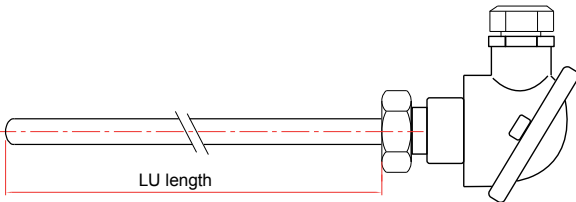

**Technical features**

- Maximal operating temperature.....+1150°C
- Accuracy for class 1.....See "Tolerances" table
- Mounting of welding.....Insulated hot welding  
Simple pair or 2x2 wires multi pair mounting .
- Contact tip.....Stainless steel sheath 310 (heat-resisting steel)  
Ø 13,5 x 2,35 mm or 21,3 x 2.65 mm in standard
- Compression fitting.....Stainless steel 316 L
- Electrical connection.....ceramic terminal block 2 or 4 contacts.  
Transmitter as option.
- Connection head.....Aluminium alloy (120°C max)  
Cable gland : M20/150  
IP65 protection .
- Storage temperature.....from -20°C to +80°C

**Tolerances**

TC	MEASURING RANGE CLASS 1	TOLERANCE
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs

Thermocouple



## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters




## Thermocouple temperature sensor with standard head and mounting flange

### TBB K / TBB KI - TBBD K / TBBD KI

- Thermocouple types T, J, K and N.
- Measuring range from **-40°C to +1000°C**

#### Stainless steel contact tip max 400°C part numbers


To order, just add the codes to complete the part number.

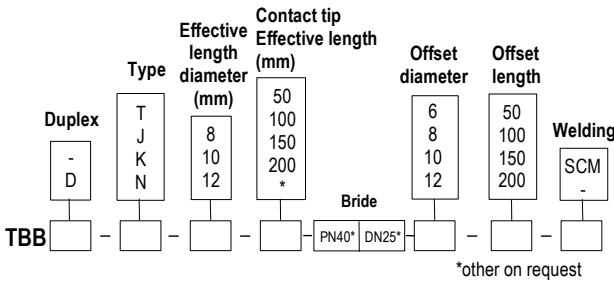

**Example :** TBB-T-8-100-PN40DN25-8-50

**Model :** Thermocouple sensor type T, insulated welding. Stainless steel contact tip with an effective length of 100 mm and 8 mm Ø and with an offset length of 50 mm and 8 mm Ø. Mounting flange type PN40 DN25. **Standard measuring range from -40°C to 350°C.**


#### Lined contact tip max 1000°C part numbers

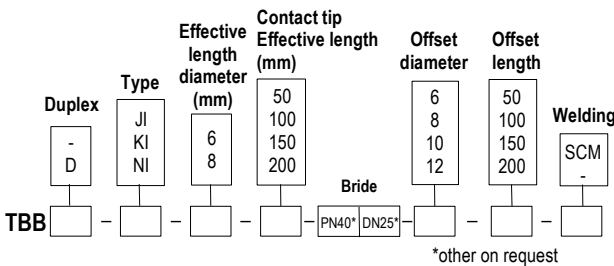

**Example :** TBB-JI-8-100-PN40DN25-8-50

**Model :** Thermocouple sensor type T, insulated welding. Inconel contact tip with an effective length of 100 mm and 8 mm Ø and with an offset length of 50 mm and 8 mm Ø. Mounting flange type PN40 DN25. **Standard measuring range from -40°C to 400°C.**

#### Dimensions

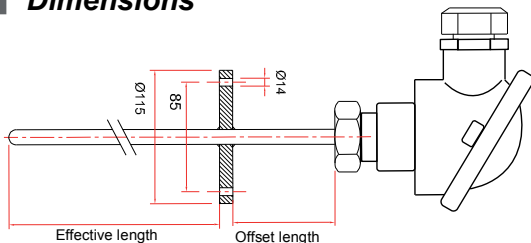

#### Technical features

**Working temperature.....**For **TBK series**  
from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K et N  
For **TBKI series**  
from -40°C to +750°C for Tc J  
from -40°C to +1000°C for Tc K and Tc N

**Recommended temperature.....**According to contact tip Ø in inconel 600  
from 0.5 to 1 mm Ø : up to 300°C  
from 1.5 to 2 mm Ø : up to 750°C  
3 mm Ø : up to 900°C  
from 4.5 to 8 mm Ø : up to 1000°C



**Accuracy for class 1.....**See "Tolerances" table

**Mounting of welding.....**Insulated or to earth hot welding  
Single pair or 2x2 wires multipair mounting.

**Contact tip.....**Stainless steel 316 L or lined inconel 600 for I series  
Compacted magnesia and stainless steel 316 L for TBB and TBBD series

**Compression fitting.....**stainless steel 316 L flange welded on contact tip  
PN and DN have to be specify according to use  
PN 40 DN 25 in standard.

**Electrical connection.....**Ceramic block junction 2 or 4 contacts.  
Transmitter as option.

**Connection head.....**Aluminium alloy (max 120°C)  
Cable gland : M20/150  
IP 65 protection.

**Storage temperature.....**from -20°C to +80°C

#### Tolerances

TC	MEASURING RANGE CLASS 1	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T° abs
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T° abs
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs

Thermocouple

## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters




## Thermocouple temperature sensor with standard head and clamp fitting

### TBRC K / TBRC D K

- Thermocouple types T, J, K and N.
- Measuring range (according to part number) from **-40°C to +400°C**
- Mounting with clamp fitting.

#### Part numbers

To order, just add the codes to complete the part number.

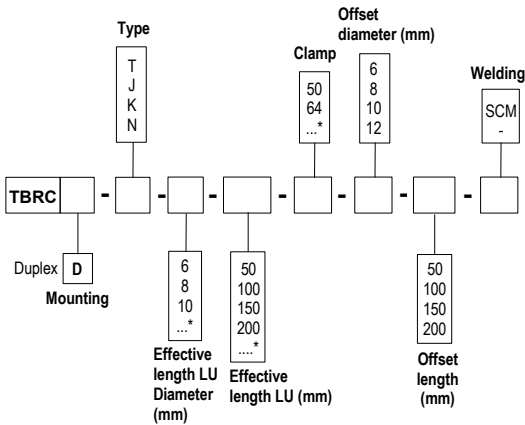


\* Other dimension on request

**Example : TBRC6-100-50-6-50-SCM.**

**Model :** Thermocouple sensor type K welded to earth. Contact tip effective length of 100 mm and 6 mm Ø with an offset length of 50 mm and 6 mm Ø. Contact tip with clamp fitting of 50,5 mm Ø for a DN ferrule from 25 to 42,4 mm.

**Measuring range from -40°C to 400°C.**

#### Dimensions

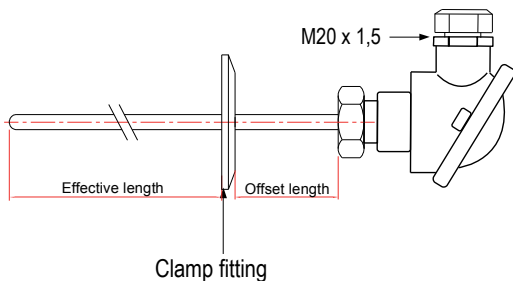

#### Technical features

- Working temperature**.....from -40°C to +350°C for Tc T  
from -40°C to +400°C for J, K et N
- Accuracy for class 1**.....See "Tolerances" table
- Mounting of welding**.....Insulated or to earth hot welding  
Single pair or 2x2 wires multipair mounting
- Storage temperature**.....from -20°C to +80°C
- Contact tip**.....stainless steel 316 L
- Clamp fitting**.....stainless steel 316 L  
- **In standard**  
**50** : 50,5 mm Ø cap for DN ferrules from 25 to 42,4mm  
**64** : 64 mm Ø cap for DN ferrules from 48,3 to 51mm  
(Other cap for clamp on request)  
- **Accessories**  
Ferrule and collar on request
- Electrical connection**.....with or without terminal block  
Transmitter 4/20mA 0/10V as option
- Connection head**.....Aluminium alloy  
Cable gland : M20 x 1,5  
IP65 protection
- Adjustable mounting**.....See catalogue or data sheet of related mounting

#### Tolerances

TC	MEASURING RANGE CLASS 11	TOLERANCE
T	From -40°C to +350°C	From -40°C to +125°C ± 0.5°C From 125°C to +350°C ± 0.004 x T° abs
J	From -40°C to +750°C	From -40°C to +375°C ± 1.5°C From 375°C to 750°C ± 0.004 x T° abs
K	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs
N	From -40°C to +1000°C	From -40°C to +375°C ± 1.5°C From 375°C to 1000°C ± 0.004 x T° abs

## ■ Most common thermocouple types

THERMOCOUPLE TYPE	+ CONDUCTOR	- CONDUCTOR	COLOR OF COMPENSATING CABLE
K	Nickel-Chrome 10%	Nickel-Aluminium 5% -Silicium	Ext. color + = GREEN, - = WHITE
T	Copper	Copper-Nickel	Ext. color + = BROWN, - = WHITE
J	Iron	Copper-Nickel	Ext. color + = BLACK, - = WHITE
N	Nickel 84,4% Chromium 14,2% Silicium 1,4%	Nickel 95,6% Silicium 4,4%	Ext. color + = PINK, - = WHITE
R	Platinum-Rhodium 13%	Platinum	Ext. color + = ORANGE, - = WHITE
S	Platinum-Rhodium 10%	Platinum	Ext. color + = ORANGE, - = WHITE
B	Platinum-Rhodium 30%	Platinum-Rhodium 6%	Ext. color + = GREY, - = WHITE

## ■ Accessories (See data sheet)

- Extension cable
- Compensating cable
- Standard or miniature connector
- Cable seal for plug and socket connector
- Miniature or standard fixed connector
- Miniature or standard connectors panel
- Extension lead
- Converters

*Temperature sensor  
K thermocouple with grip handle*


*Special Fermenting room*

**CROS - K - 1700**



- K thermocouple
- Measuring range **from -50°C to +250°C**
- Length of 1700 mm, others on request
- Stainless steel protection sheath
- Stainless steel grip handle
- Tip with shrink for a very fast response time
- Probes compatible with KISTOCK temperature dataloggers and portable thermometers

Special probes **Fermenting room** allow to measure temperature in the specific conditions of wine-making process.

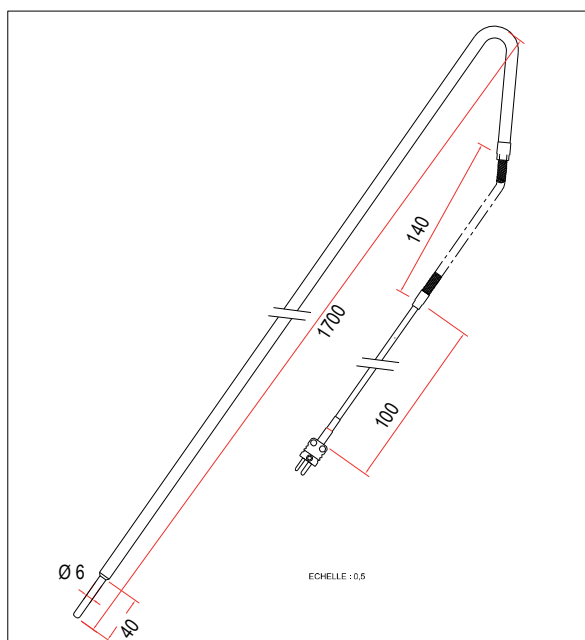

## ■ Description

### Grip handle



Reinforced cable output with flexible.  
K thermocouple miniature male connector .

### Shrink



Protection sheath in food-  
industry stainless steel 316 L  
Ø 10 mm, shrink in 6 mm  
Hot welding on the earth

## ■ Specifications

Probe	Length	Range	Accuracy	Compatible with...
CROS-K-1700	1700 mm	from -50 to +120°C	±1,1°C or ±0,4% of reading*	<b>Portable thermometers :</b> TK100 / TM200 / TKA <b>Temperature dataloggers :</b> KTT300

\*All accuracies indicated in this document were stated in laboratory conditions and can be guaranteed for measurements carried out in the same conditions, or carried out with required compensation. The accuracy is expressed either by a deviation in °C, or by a percentage of the value concerned. Only the bigger value is considered.

## ■ Optional

Protection cover IP65.  
Calibration certificate.

Portable thermometers .  
Temperature datalogger

### With KISTOCK temperature datalogger



### With portable thermometers




# Temperature probes

## thermocouple K / NTC / PT100

### Special compost

- Measuring ranges from -50°C to +400°C
- Lengths from 1000 mm to 2000 mm
- Protection sheath made in stainless steel, perpendicular handle and bevel-edged tip
- Robust and hard-wearing
- Probes compatible with temperature dataloggers and with portable thermometers

Temperature dataloggers version\*.

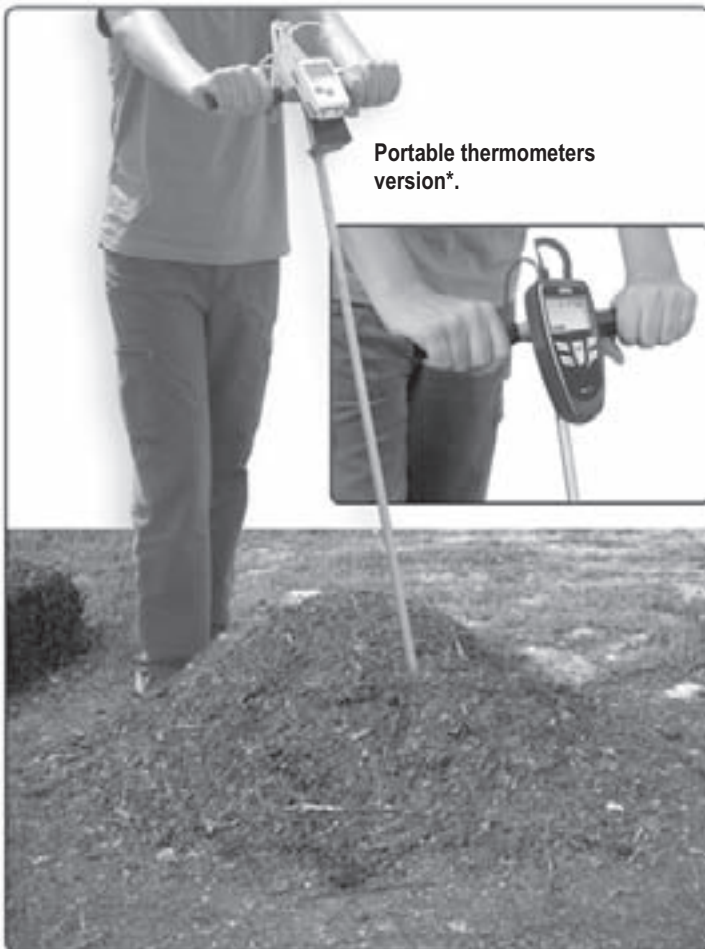


Portable thermometers version\*.

\*Sold separately.

The “**Special compost**” temperature probes allow measurement in specific environments such as:

### Compost

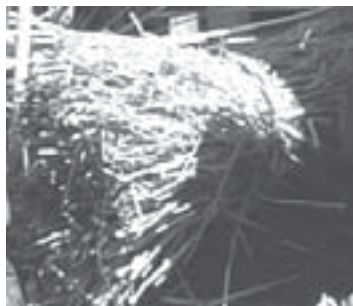

Straw



Grain elevator

Thermocouple



## Description

**Perpendicular handle**  
2 x 150 mm, Ø 21,3 mm



**Bevel-edged tip**




**NTC plug**




**PT100 plug**



**Thermocouple K plug**



**Protection sheath**  
stainless steel 316 L  
Ø 16 x 2 mm  
**Grounded hot junction**

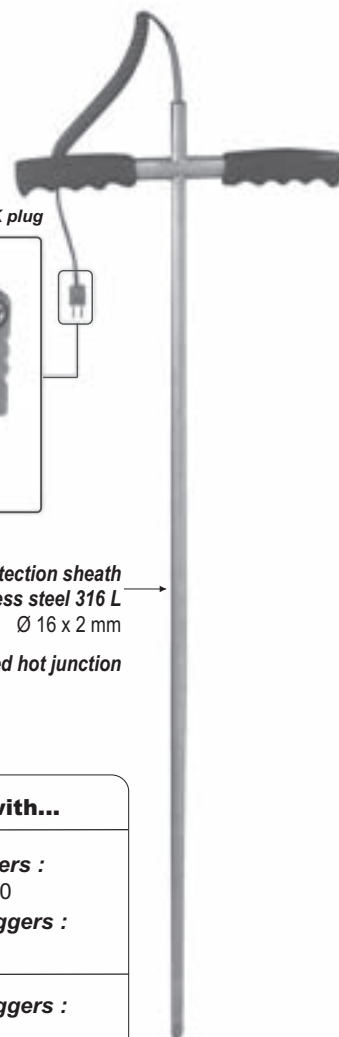

## Specifications

Probe	Length	Measuring range	Accuracy	Compatible with...
<b>STKP 1000</b> <b>STKP 1500</b> <b>STKP 2000</b>	1000 mm 1500 mm 2000 mm	de -50°C à +400°C	± 1.1°C ± 0.4% of value displayed	<b>Portable thermometers :</b> TK50 / TK100 / TM200 <b>Temperature dataloggers :</b> KTT300
<b>KCC 1500 I</b> (CTN)	1500 mm	de -40°C à +120°C	± 0.3°C (-25°C < T < +70°C) ± 0.5°C above	<b>Temperature dataloggers :</b> Classes 100 / 200
<b>KRCI 1500</b> (PT100)	1500 mm	de -50°C à +400°C	± 0.3°C ± 0.4% of value displayed	<b>Temperature dataloggers :</b> Class 300

## Options

The **KSP** stand allows you to fasten temperature devices (portable or datalogger) to the probe, making measuring campaigns easier.



**Fastening on stand with temperature datalogger**



**Fastening on stand with portable thermometers**



**Part 5 : Accessories**

**PT 100/PT 1000/CTN Accessories**



**Watertight connections**.....p 177



**Thermowells**.....p 178



**Connectors**.....p 179



**Bases**.....p 179



**Fixations**.....p 180



**Cords & cables**.....p 181



**Converters**.....p 183




**Miscellaneous**.....p 184

**Thermocouple Accessories**



**Watertight connections**.....p 185



**Thermowells**.....p 186



**Fixations**.....p 187



**Connectors**.....p 187



**Bases & panels**.....p 190



**Cords & cables**.....p 192



**Converters**.....p 193



**Miscellaneous**.....p 194



## Accessories for RTD temperature sensors

### — Connections —

#### ■ Watertight connections

This stainless steel compression fitting allows watertight connection of a temperature sensor using a stainless steel not adjustable ferrule or a teflon adjustable ferrule.



#### • Technical features

##### Working temperature :

Stainless steel ferrule (316L).....from -50°C to +400°C (Not adjustable)  
Teflon ferrule (PTFE).....from -50°C to +250°C (Adjustable)



#### • Part numbers

Probe Ø (mm)	Cylindrical gas	Stainless steel ferrule	Teflon ferrule
3	1/8"	RCI-3/18	RCT-3/18
3	1/4"	RCI-3/14	RCT-3/14
4	1/8"	RCI-4/18	RCT-4/18
4	1/4"	RCI-4/14	RCT-4/14
4	3/8"	RCI-4/38	RCT-4/38
6	1/8"	RCI-6/18	RCT-6/18
6	1/4"	RCI-6/14	RCT-6/14
6	3/8"	RCI-6/38	RCT-6/38
6	1/2"	RCI-6/12	RCT-6/12
8	1/4"	RCI-8/14	RCT-8/14
8	1/2"	RCI-8/12	RCT-8/12
10	1/2"	RCI-10/12	RCT-10/12
12	1/2"	RCI-12/12	RCT-12/12
14	1/2"	-	RCT-14/12

## Stainless steel thermowells

### • Technical features

**Working temperature**.....from -80°C to +400°C  
**Protective duct**.....stainless steel 316 L, Ø 9x1 or Ø 6x1 mm.  
**Mounting**.....welded  
**Contact tip**.....stainless steel 316L, no welding  
**Process connection**.....stainless steel ½" G male (other connection on request)  
**Probe connection**.....stainless steel ½" G female (other connection on request) OR or fixing screw.

#### Options :

- Treatment with teflon, halar etc...
- Swaging

#### Accessories :

**Thermo – conducting silicone grease 200g (Part number GST)**




**Working temperature** : from -60°C to +200°C  
**Storage** : >1 year at room temperature (< 50°C)  
**Solvent** : trichlorethane

### Threaded thermowell



#### • Determination of thermowell length

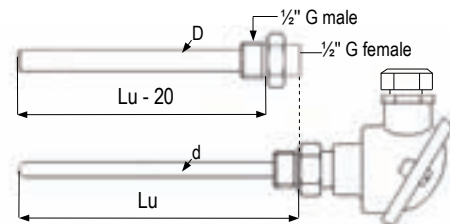


$$Lu_{\text{thermowell}} = Lu_{\text{probe}} - 20\text{mm}$$

### Thermowell with screw connection



#### • Determination of thermowell length

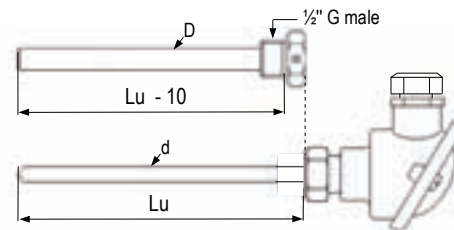

$$Lu_{\text{thermowell}} = Lu_{\text{probe}} - 10\text{mm}$$


#### • Determination of thermowell diameter

Informative table :

Probe Ø in mm	Thermowell Ø in mm
4	7
6	9
8	12
10	14
12	21,3
14	21,3

For mounting gap of 3 mm or more, the use of thermo-conducting grease is recommended (GST)

#### • Thermowell part numbers

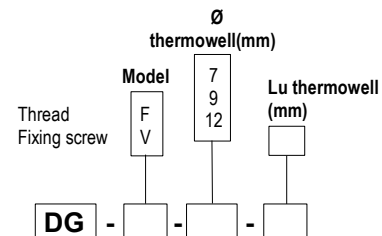

## Connectors

### Standard connector



Connector **three round pins** for the connexion of Pt 100 probe on cables or on mineral insulated cable. Polarized pins.

A system of locating pin prevents the inversion of polarity.

**Material** : glass silk filled thermoplastic


**Temperature resistance** : from -50°C to +210°C

**For wire of diameter** : 0.2 mm to 2.0 mm

**Connection cable** : 8.0 mm maxi.

**Standard color** :blanc

Connector  
type



Part numbers :

### Miniature connector



Connector **three flat pins** for the connexion of Pt 100 probe on cables or on mineral insulated cable. Polarized pins.

A system of locating pin prevents the inversion of polarity.

**Material** : glass silk filled thermoplastic


**Temperature resistance** : from -50°C to +210°C

**For wire of diameter** : 0.002 mm to 0.6 mm

**Connection cable** : 4.5 mm maxi.

**Standard color** :white

Connector  
type



Part numbers :

## Base

### Standard base for panel



Connector **three round pins** for mounting on panel. Polarized pins. A system of locating pin prevents the inversion of polarity.

**Material** : glass silk filled thermoplastic

**Temperature resistance** : from -50°C to +210°C

**For wire of diameter** : 0.2 mm to 2.0 mm

**Connection cable** : 8.0 mm maxi.

**Standard color** :white

Part numbers :  —

### Miniature base for panel



Connector **three flat pins** for mounting on panel. Polarized pins. A system of locating pin prevents the inversion of polarity.

**Material** : glass silk filled thermoplastic

**Temperature resistance** : from -50°C to +210°C

**For wire of diameter** : 0.002 mm to 0.6 mm


**Connection cable** : 4.5 mm maxi.

**Standard color** : white

Part numbers :  —


## ■ Fixations

### Mounting brackets




**BF - 4** : Stainless steel (316L) mounting brackets for duct fixing of probes  $\varnothing$  4 et 3mm.  
**BF - 6** : As above,  $\varnothing$  6 mm.  
**BF - 8** : As above,  $\varnothing$  8 mm.

### Wall supports

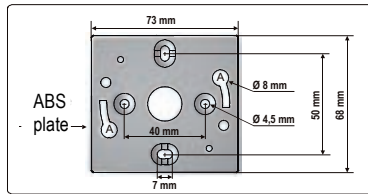

**PF - 100** : ABS wall-mount plate for **SG 50** and **SG 100** sensors.

### Wall fixing support for probe with connection



**BF-M** : Stainless steel (316 L) wall fixing support. Delivered with a  $\frac{1}{2}$ " G screw nut.

### Wall fixing support for probe on cable

For **SF 50** with a probe of 100mm minimum length



**SFM - 4** : Wall fixing support made of translucent polycarbonate for probe  $\varnothing$  4 mm and with 100 mm minimum length.  
**SFM - 6** : As above,  $\varnothing$  6 mm.  
**SFM - 8** : As above,  $\varnothing$  8 mm.

## ■ Cord for resistive probe

### Normal cord



Cord for probes connection. You have to determine cable selection, cable length and configuration : male / male or male / female

Cable		Cable length (m)	Connector	
PB	from -40°C to +105°C	1	CMM	CMM
TB	from -40°C to +260°C	2	CMF	CMF
		3	CSM	CSM
			CSF	CSF

Part numbers : CD - P - [ ] - [ ] - [ ] - [ ]

### Coiled cord



Cord for probes connection. You have to determine cable selection, cable length and configuration : male / male or male / female


- Length at rest : 450 mm
- Developed length : 2000 mm
- Material : PVC
- Max. temperature : 105°C

Connector	
CMM	CMM
CMF	CMF
CSM	CSM
CSF	CSF

Part numbers : CDS - P - [ ] - [ ]

## ■ Instrumentation cable for the link of resistive probe

### PVC / Tinned copper braid / PVC



- Conductors section : 3 x 0,75 mm<sup>2</sup>
- Braid : Cu Sm 85% (tinned copper)
- Color : 2 red conductors  
1 white conductor
- Max. temperature : 70°C

Cable length (m)
1
2
10
50
100

Part numbers : CI - P - [ ]



## ■ Cable of resistive probe

### Not shielded

Nature of the cable	Working temperature	Section of conductors	Number of conductors	Part numbers
PVC	From -40 to +105 °C	0.22 mm <sup>2</sup>	3	CE-PVC-3
			4	CE-PVC-4
Silicone	From -60 to +180 °C	0.22 mm <sup>2</sup>	3	CE-SIL-3
			4	CE-SIL-4
Teflon	From -190 to +260 °C	0.22 mm <sup>2</sup>	3	CE-PFA-3
			4	CE-PFA-4

### Shielded

Nature of the cable	Working temperature	Section of conductors	Number of conductors	Part numbers
PVC	From -40 to +105 °C	0.22 mm <sup>2</sup>	3	CE-PB-3
			4	CE-PB-4
			6	CE-PB-6
Silicone	From -60 to +180 °C	0.22 mm <sup>2</sup>	3	CE-SB-3
			4	CE-SB-4
			6	CE-SB-6
Teflon	From -190 to +260 °C	0.22 mm <sup>2</sup>	3	CE-TB-3
			4	CE-TB-4
			6	CE-TB-6
Glass silk	From -60 to +400 °C	0.22 mm <sup>2</sup>	3	CE-SvB-3
			4	CE-SvB-4
			6	CE-SvB-6

## Convertors

### CST transmitter




**Mounting** : connection head DIN "B"  
**Input** : PT100 3 wires  
**Output** : 4-20 mA 2 wires  
**Accuracy** :  $\pm 0.1^{\circ}\text{C} \pm 0.1\%$  of reading (-100 to  $+500^{\circ}\text{C}$ )  
 $\pm 0.2^{\circ}\text{C} \pm 0.2\%$  of reading (-200 to  $+650^{\circ}\text{C}$ )  
**Linearisation** : EN 60751, IEC 751, BS 1904 ( $\alpha=0,00385$ )  
**Operating voltage** :  
 7 to 30 VDC polarity protected  
**Power supply influence** :  
 $\pm 0.02\%$  /V gap in relation to 24 V  
**Resistance influence** :  
 0.4  $\mu\text{A/V}$

#### Temperature range to be specified

**Working temperature** : from 0 to  $+70^{\circ}\text{C}$   
**Storage temperature** : from  $-40$  to  $+70^{\circ}\text{C}$   
**Temperature dependence** :  $\pm 0.01^{\circ}\text{C}/^{\circ}\text{C}$   
**Measuring range** : from -200 to  $650^{\circ}\text{C}$   
**Measuring range minimale** :  $25^{\circ}\text{C}$   
**Safety** : max 22 mA  
**Charge calculation according to power supply** :  
 $\text{RLmax} (\Omega) = (V - 9)/0,022 = 680 \Omega$  at 25 Vdc  
**Dimensions (mm)** : Base  $\varnothing$  43, height 20.5, pitch 33

### CRD-P transmitter (Passive / 2 wires)



**Mounting** : rail DIN symetric or asymmetrical  
**Input** : PT100 3 wires  
**Output** : 4-20 mA 2 wires  
**Accuracy** :  $\pm 0.1^{\circ}\text{C} \pm 0.1\%$  of reading (-100 to  $+500^{\circ}\text{C}$ )  
 $\pm 0.2^{\circ}\text{C} \pm 0.2\%$  of reading (-200 to  $+650^{\circ}\text{C}$ )  
**Linearisation** : En 60751, IEC 751, BS 1904 ( $\alpha=0,00385$ )  
**Operating voltage** : 7 to 30 VDC polarity protected  
**Power supply influence** :  $\pm 0.02\%$  /V in relation to 24 V  
**Resistance influence** : 0.4  $\mu\text{A/V}$   
**Working temperature** : from 0 to  $+70^{\circ}\text{C}$   
**Storage temperature** : from  $-40$  to  $+70^{\circ}\text{C}$   
**Temperature dependence** :  $\pm 0.01^{\circ}\text{C}/^{\circ}\text{C}$   
**Measuring range** : from -200 to  $650^{\circ}\text{C}$   
**Measuring range minimum** :  $25^{\circ}\text{C}$   
**Safety** : max. 22 mA  
**Charge calculation according to power supply** :  $\text{RLmax} (\Omega) = (V - 9)/0,022 = 680 \Omega$  at 25 Vdc  
**Dimensions (mm)** : depth 90, width 17,5, height 58

#### Temperature range to be specified

### CRD-A transmitter (Active / 4 wires)



**Mounting** : rail DIN symetric or asymmetrical  
**Input** : PT100 2, 3, 4 wires  
**Output** : 4-20 mA or 0-10 V  
**Accuracy** :  $\pm 0,2\%$   
**Input resistance** : 10 M $\Omega$   
**Charge (min.)** : 500 k $\Omega$   
**Operating voltage** : 230 Vac, 24 Vac, 24 Vdc and 110 Vac  
**Working temperature** : from  $-20$  to  $+60^{\circ}\text{C}$   
**Storage temperature** : from  $-20$  to  $+60^{\circ}\text{C}$

#### To be specified :

- Temperature range
- Power supply
- Output 4-20 mA  
0-10 V

### Options

#### Indicator / Programming front (IF-CRD)



- Communication interface for parameters modification
- Can be transferred from one transmitter to another one
- Display for data process and state

Accessories

## Miscellaneous

### Regulated power supply

#### • Alternating current



**KI - AL - 100 A** : Class 2 power supply for **SG100** sensors. Mounting with integrated brackets. Input voltage : 230 Vac, output voltage 24Vac, intensity 100mA.

#### • Direct current




**KI - AL - 100 C** : Class 2 power supply for **SG100** sensors, Input voltage : 230 Vac, Output voltage : 24Vdc, intensity 250mA.

### Configuration software (for SG 100)



**LCC - 100** : Configuration software for **SG 100** sensors with user manual and RS 232 connection cable.

### Soldering union

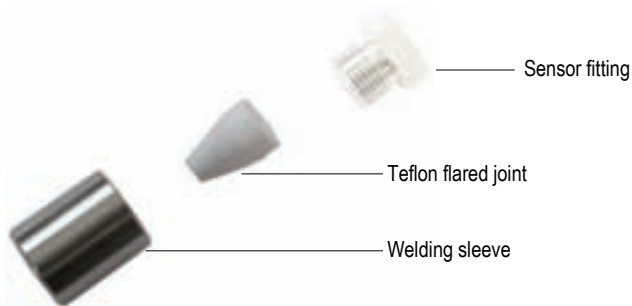

Stainless steel soldering union is for applications of type « hygienic » such as food stuffs industry, pharmaceutical... It is made of a welding sleeve and a Teflon flared seal.

## Accessories for thermocouple sensors

### — Connections —

#### ■ Watertight connections

This stainless steel compression fitting allows watertight connection of a temperature sensor using a stainless steel not adjustable ferrule or a teflon adjustable ferrule.



#### • Technical features

*Working temperature :*

Stainless steel ferrule (316L).....from -50°C to +400°C (**Not adjustable**)  
Teflon ferrule (PTFE).....from -50°C to +250°C (**Adjustable**)



#### • Part numbers

Probe Ø (mm)	Cylindrical gas	Stainless steel ferrule	Teflon ferrule
3	1/8"	RCI-3/18	RCT-3/18
3	1/4"	RCI-3/14	RCT-3/14
4	1/8"	RCI-4/18	RCT-4/18
4	1/4"	RCI-4/14	RCT-4/14
4	3/8"	RCI-4/38	RCT-4/38
6	1/8"	RCI-6/18	RCT-6/18
6	1/4"	RCI-6/14	RCT-6/14
6	3/8"	RCI-6/38	RCT-6/38
6	1/2"	RCI-6/12	RCT-6/12
8	1/4"	RCI-8/14	RCT-8/14
8	1/2"	RCI-8/12	RCT-8/12
10	1/2"	RCI-10/12	RCT-10/12
12	1/2"	RCI-12/12	RCT-12/12
14	1/2"	-	RCT-14/12

## Stainless steel thermowells

### • Technical features

**Operating temperature**.....from -80°C to +400°C

**Protective duct**.....316 L

Ø 9x1 or Ø 6x1 mm.

**Mounting**.....welded

**Duct**.....stainless steel 316L, no welding

**Process connection**.....stainless steel ½" G male (other connection on request)

**Probe connection** stainless steel ½" G female (other connection on request) or fixing screw.

#### Options :

- Treatment with teflon, halar etc...
- Swaging

#### Accessories :

Thermo - conducting silicone grease 200g (Part number GST)



**Operating temperature** : from -60°C to +200°C


**Storage** : >1 year at room temperature (< 50°C)

**Solvent** : trichlorethane

### Threaded thermowell



#### • Determination of thermowell length

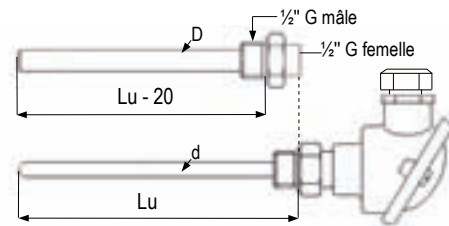


$$Lu_{\text{thermowell}} = Lu_{\text{probe}} - 20\text{mm}$$

### Thermowell with screw connection



#### • Determination of thermowell diameter

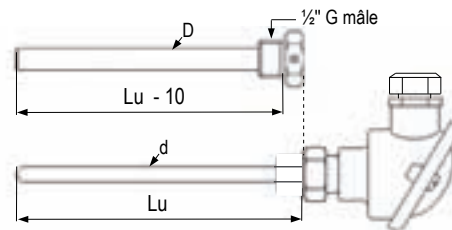

$$Lu_{\text{thermowell}} = Lu_{\text{probe}} - 10\text{mm}$$


#### • Determination of thermowell diameter

Informative table :

Probe Ø in mm	Thermowell Ø in mm
4	7
6	9
8	12
10	14
12	21,3
14	21,3


For mounting gap of 3 mm or more, the use of thermo-conducting grease is recommended (GST)

#### • Thermowell part numbers

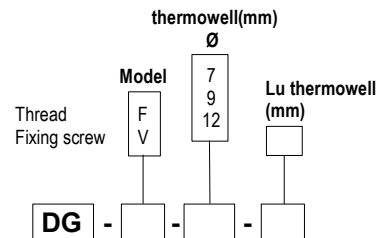


## ■ Fixations

### Mounting brackets



- BF - 4** : Stainless steel (316L) mounting brackets for duct fixing of probes Ø 4 et 3mm.
- BF - 6** : As above, Ø 6 mm.
- BF - 8** : As above, Ø 8 mm.

### Wall mounting support for probe with connection



**BF-M** : Stainless steel (316 L) wall mounting support. Delivered with a 1/2" G screw nut.

### Wall mounting support for probe on cable

For a probe of 100mm minimum length



- SFM - 4** : Wall mounting support made of translucent polycarbonate for probe Ø 4 mm and with 100 mm minimum length.
- SFM - 6** : As above, Ø 6 mm.
- SFM - 8** : As above, Ø 8 mm.


## ■ Connectors

### Compensated standard connector



Round pin miniature connectors for thermocouple sensors and extension or compensating cable connection. Connector is marked for pin polarity.

**Material** : thermoplastic shielded with glass silk  
**Operating temperature** : from -50°C to +210°C  
**Colour code** : IEC 584-3




### Compensated miniature connector



Flat pin miniature connectors for thermocouple sensors and extension or compensating cable connection. Connector is marked for pin polarity.

**Material** : thermoplastic shielded with glass silk  
**Operating temperature** : from -50°C to +210°C  
**Colour code** : IEC 584-3



## Connectors

### Compensated standard connector



Reinforced thermoplastic connector

Up to  
+650°C



Ceramic connector

**Connector two round pins** for the connection of thermocouples and/or with compensating or extension cables.  
A system of locating pin prevents the inversion of polarity.

**Material :** 35 : reinforced thermoplastic  
65 : ceramic

**Temperature resistance :** 35 : 350 °C  
65 : 650 °C

**Standard color :** IEC 584-3

**Part numbers :**

		Connector type	Temperature resistance	Thermocouple type
Female		CSF	35	J K T N S
Male		CSM	65	
		[ ]	[ ]	[ ]

### Compensated miniature connector



Up to  
+650°C



**Connector two flat pins** for the connection of thermocouples and/or with compensating or extension cables.  
A system of locating pin prevents the inversion of polarity.

**Material :** 35 : reinforced thermoplastic  
65 : ceramic


**Temperature resistance :** 35 : 350 °C  
65 : 650 °C

**Standard color :** IEC 584-3

**Part numbers :**

		Connector type	Temperature resistance	Thermocouple Type
Female		CMF	35	J K T N S
Male		CMM	65	
		[ ]	[ ]	[ ]

### Multiple connector with male standard connector

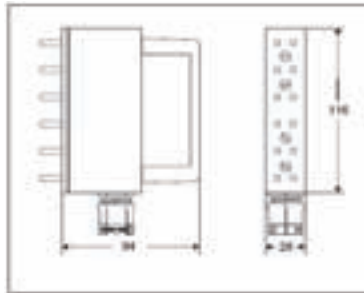


Multiple connector for thermocouple. Suitable for the simultaneous connection of 1 to 6 standard circuits.

- Housing in robust steel with epoxy coating.
- Handle in anodised aluminium for an easy grip.
- Cable gland PG 13 for 15 mm max. cable
- Screw terminal block for conductor 0.2 to 2 mm
- Compatible with standard base panel
- Temperature resistance : 200 °C max

T	1
J	2
K	3
N	4
S	5
	6

**Part numbers :** PM - [ ] - [ ]

### Multiple connector with female standard connector

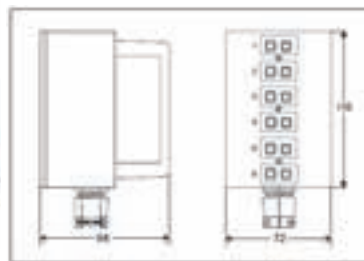

Multiple connector for thermocouple. Suitable for the simultaneous connection of 1 to 6 standard circuits.


- Housing in robust steel with epoxy coating.
- Handle in anodised aluminium for an easy grip.
- Cable gland PG 13 for 15 mm max. cable
- Screw terminal block for conductor 0.2 to 2 mm
- Temperature resistance : 200 °C max

T	1
J	2
K	3
N	4
S	5
	6

**Part numbers :** PMF - [ ] - [ ]

## Connectors accessories

### • Silicone rubber boot for connector

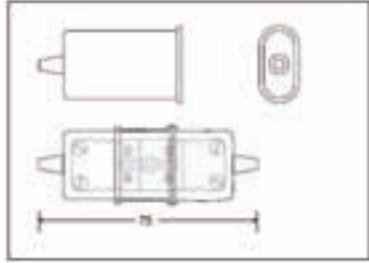


For wet use, good vibration resistance.  
**Temperature resistance** : 200 °C

Delivered by two pieces, for male and female connectors.  
 Appropriate for most of cable diameters.




**Part numbers** : **PS** —

### • Wire clamp bracket

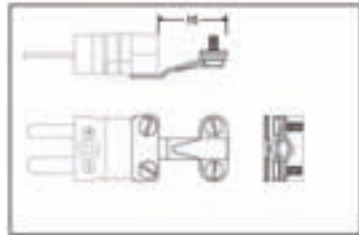

Stainless steel wire clamp bracket for miniature or standard connectors



**Part numbers** : **SC** —

### • Locking plate for miniature connector



The plate prevents the unwanted disunity of miniatures connectors.

**Material** : thermoplastic with glass silk

**Temperature** : 200 °C maxi

Can be placed and removed without any tools

**Part numbers** : **PV** — **CM**



## ■ Snap-on connectors

### Standard snap-on connectors



Standard snap-on connectors with round pins for thermocouple sensors and extension or compensating cable connection. Connector is marked for pin polarity.

**Material** : thermoplastic glass silk shielded  
**Operating temperature** : from -50°C to +210°C  
**Colour code** : IEC 584-3

Thermocouple type

J  
K  
T  
N  
S

Part numbers : ES -

### Miniature snap-on connectors



Standard snap-on connectors with flat pins for thermocouple sensors and extension or compensating cable connection. Connector is marked for pin polarity.


**Material** : thermoplastic glass silk shielded  
**Operating temperature** : from -50°C to +210°C  
**Colour code** : IEC 584-3

Thermocouple type

J  
K  
T  
N  
S

Part numbers : EM -

### Round base for standard connector

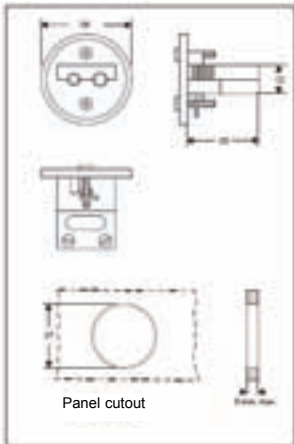


Round base for control panel.

**Cutout** :  $\varnothing$  27 mm  
**Material** : thermoplastic with glass silk  
**Temperature** : 200 °C max  
**Fixing** : 2 screws in front face  
**Connection for wire** : from 0.2 to 2 mm

J  
K  
T  
N  
S

Part numbers : EC - S -

### Round base for miniature connector

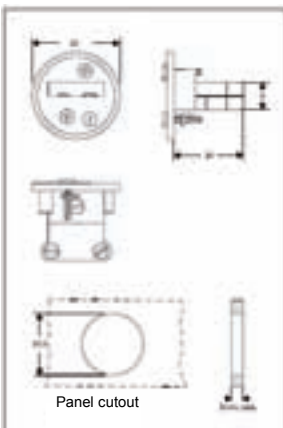

Round base for control panel.

**Cutout** :  $\varnothing$  22.5 mm  
**Material** : thermoplastic with glass silk  
**Temperature** : 200 °C max  
**Fixing** : 2 screws in front face  
**Connection for wire** : from 0.002 to 0.6 mm

J  
K  
T  
N  
S

Part numbers : EC - M -

## ■ Connector panel

### For standard snap-on connectors



**Number of channels : 2, 4, 6, 8, 12 or 24**  
**Anodised aluminium** panel (width ≈ 2 mm)  
**Dimensions** : according to number of channels  
 (D = number of channel x 19 + 31 mm)  
**Supplied with snapped on connectors.**

Thermocouple type	Connector number
J	1
K	6
T	12
S	

Part numbers : PES -  -

### For miniature snap-on connectors




**Number of channels : 2, 4, 6, 8, 12 or 24**  
**Anodised aluminium** panel (width ≈ 2 mm)  
**Dimensions** : according to number of channels  
 (D = number of channel x 19 + 31 mm)  
**Supplied with snapped on connectors.**

Thermocouple type	Connector number
J	1
K	6
T	12
S	

Part numbers : PEM -  -

\*other on request

## ■ Control panel



The connector enables easy and quick access to thermocouple circuit in order to control sensor and instrument accuracies, circuit continuity and loop resistance.


Thermocouple type
J
K

Part numbers : PEC -

## Cables

### Extension cable

#### • PVC / Tinned copper braid / PVC



**Conductors section** : 2 x 0,22 mm<sup>2</sup> (For Tc T, J and K)  
**Conductors composition** : 2 x 7 strands Ø 0.2 mm  
**Operating temperature** : from -40°C to +105°C, short time at +135°C  
 Colour code IEC 584-3

**Thermocouple type**

J  
K  
T  
N


**Cable length (m)**

1  
2  
3  
...\*

**Part numbers** : CE -  - PB -

\*other on request

#### • Pfa / Tinned copper braid / Pfa



**Conductors section** : 2 x 0,22 mm<sup>2</sup>  
**Conductors composition** : 2 x 7 strands Ø 0.2 mm  
**Operating temperature** : from -40°C to +250°C  
 Colour code IEC 584-3

**Thermocouple type**

J  
K  
T  
N

**Cable length (m)**


1  
2  
3  
...\*

**Part numbers** : CE -  - TB -

\*other on request

### Compensating cable

#### • Fep / Tinned copper braid / Fep (For type S only)



**Conductors section** : 2 x 0,22 mm<sup>2</sup> (For Tc T, J and K)  
**Conductors composition** : 2 x 7 strands Ø 0.2 mm  
**Operating temperature** : from -40°C to +205°C, short time at +230°C  
 Colour code IEC 584-3

**Cable length (m)**

1  
2  
3  
...\*

**Part numbers** : CP - S - TB -

\*other on request

## Extension lead

### Lead with choice of connectors and cable



- Lead with miniature plug and socket connectors
- Lead with standard plug and socket connectors
- Other on request

**Thermocouple type**

J  
K  
T  
N  
S\*

**Cable**

PB from -40°C to +105°C  
TB from -40°C to +260°C  
SV from -40°C to +400°C

**Cable length (m)**

1  
2  
3  
...\*

**Connector**

CMM  
CMF  
CSM  
CSF

**Part numbers** : CD -  -  -  -  -

\*with shielded Fep cable only

### Coiled extension leads



- Length 160 mm (1800 mm uncoiled)
- Lead with miniature plug and socket connectors
- Lead with standard plug and socket connectors
- Temperature max. 105°C
- Other on request

**Connector**

CMM  
CMF  
CSM  
CSF

**Part numbers** : CDSK -  -

## Converters

### CST-TC transmitter



**Mounting** : connection head DIN "B"

**Input** : Thermocouple J, K, T, N

**Output** : 4-20 mA 2 wires

**Accuracy** :  $\pm 0.04\%$  FS  $\pm 0.04$  of reading or  $0.5^\circ\text{C}$  (the biggest)

**Linearisation** : EN 60584-1-2, ASTM E 230 – ANSI (MC96-1)

**Default range** : 0 to  $1000^\circ\text{C}$

**Power supply** :

9 to 30 VDC polarity protected

**Power supply influence** :

$\pm 0,4 \mu\text{A/V}$

**Working temperature** : from  $-30$  to  $+80^\circ\text{C}$

**Storage temperature** : from  $-40$  to  $+80^\circ\text{C}$

**Minimum temperature range** :  $50^\circ\text{C}$

**Conversion speed** : 2 measurements per second

**Charge calculation according to power supply** :


$RL_{\text{max}} (\Omega) = (V - 9)/0,022 = 680 \Omega$  at 25 Vdc

**Galvanic insulation** : 50 Vdc

**To be specified :**

- Temperature range
- Thermocouple type

### CRD-TC-P transmitter (Passive / 2 wires)



**Mounting** : rail DIN symmetric or asymmetrical

**Input** : Thermocouple J, K, T, N

**Output** : 4-20 mA, 2 wires

**Accuracy** :  $\pm 0.04\%$  FS  $\pm 0,04$  of reading or  $0.5^\circ\text{C}$  (the biggest)

**Linearisation** : EN 60584-1-2, ASTM E 230 – ANSI (MC96-1)

**Power supply** : 9 to 30 VDC

**Default range** :  $T_c = K - \text{Rang} = 0$  to  $1000^\circ\text{C}$

**Working temperature** : from  $0^\circ\text{C}$  to  $+70^\circ\text{C}$

**Storage temperature** : from  $-40^\circ\text{C}$  to  $+80^\circ\text{C}$

**Minimal measuring range** :  $50^\circ\text{C}$

**Conversion speed** : 2 measurements per second

**Charge calculation according to power supply** :  $RL (W) = (V - 9)/0,02$

**Galvanic insulation** : 50 Vdc

**Dimensions (mm)** : depth 100, width 22, height 75

**Temperature range to be specified**

### CRD-TC-A transmitter (Active / 4 wires)



**Mounting** : rail DIN symmetric or asymmetrical

**Input** : Thermocouple J, K, T, N

**Output** : 4-20 mA or 0-10 V

**Accuracy** :  $\pm 0.1\%$  pe

**Input resistance** :  $10 \text{ M}\Omega$

**Charge (min.)** :  $500 \text{ k}\Omega$

**Operating voltage** : 230 Vac, 24 Vac, 24 Vdc and 110 Vac

**Working temperature** : from  $-20$  to  $+60^\circ\text{C}$

**Storage temperature** : from  $-20$  to  $+60^\circ\text{C}$

**To be specified :**

- Temperature range
- Power supply
- Output 4-20 mA  
0-10 V

### Optional

#### • Indicator / Programming front (IF-CRD)



- Communication interface for parameters modification
- Can be transferred from one transmitter to another one
- Display for data process and state

## ■ Miscellaneous

### Regulated power supply

#### • Alternating current



**KI - AL - 100 A** : Class 2 power supply for sensors. Mounting with integrated brackets. Input voltage : 230 Vac, output voltage 24Vac, intensity 100mA.

#### • Direct current



**KI - AL - 100 C** : Class 2 power supply for sensors, Input voltage : 230 Vac, Output voltage : 24Vdc, intensity 250mA.

Ref. FT - Accessories-TC - 02/09 C - RCS (24) Périgueux B349 282 095 Non-contractual document - We reserve the right to modify the characteristics of our products without prior notice.

Distributed by :



[www.kimo.fr](http://www.kimo.fr)



**KIMO** - Export Department  
Boulevard de Beaubourg - BP 48  
Emerainville - F-77312 MARNE LA VALLEE  
Tél. +33 (0)1 60 06 69 25 - Fax +33 (0)1 60 06 69 29  
Email : [export@kimo.fr](mailto:export@kimo.fr)

Distributed by :



[www.kimo.fr](http://www.kimo.fr)



**KIMO** - Export Department  
Boulevard de Beaubourg - BP 48  
Emerainville - F-77312 MARNE LA VALLEE  
Tél. +33 (0)1 60 06 69 25 - Fax +33 (0)1 60 06 69 29  
Email : [export@kimo.fr](mailto:export@kimo.fr)