


Recommended solid floor structure for sub screed heating installation.

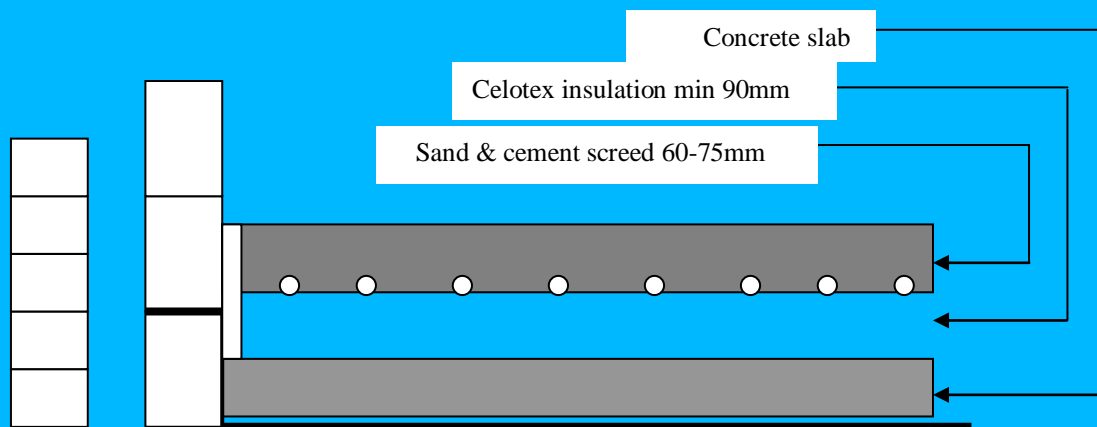

Recommended insulation would be a minimum of 90mm foil faced board with thermal conductivity below 0.019 W/m such as Celotex®.

Insulation thickness must also comply with building regs requirement.

Vertical insulation should be no thicker than combined thickness of plaster finish and skirting boards.

