



Wheelalong Two Step with grab handle



Push-it along ...



Pull-it along ...

Ideal moveable access steps for industry, offices, libraries and hospitals etc. Finished in a choice of four attractive powder coated colours.



or carry-it along

48 HOURS
DESPATCH

Fitted with wheels to aid moving to new location. Stable to use and Easy to Move.

Manufactured from ERW tube, with formed steel steps fitted with ribbed rubber or anti-slip treads.



Fitted with 2 x 50mm wheels with rubber non-marking tyres.

Model S230G

CHOICE OF COLOURS AT NO EXTRA COST

Description	Tread	Overall H x W x D mm	Top tread mm	Weight Kgs	Ref	Ref	Ref	Ref
					Grey	Red	Blue	Yellow
Two step	R/Rubber	1030 x 500 x 355	385	8	S230/G	S230/R	S230/B	S230/Y
	Anti-slip	1030 x 500 x 355	385	8	S240/G	S240/R	S240/B	S240/Y

Wheelalong Two and three Steps

Fitted with 75 mm wheels with grey non marking rubber tyres.



Model S029/B

Model S029/R

Model S028/G

Model S028/Y

48 HOURS
DESPATCH



Tilt and Move ...

Pull-it along ...

Static steps which are fitted with 2 x 75mm dia wheels to the rear frame. When steps are tilted, wheels allow easy movement to next location.

Finished in powder coating in choice of grey, red, blue or yellow.

CHOICE OF COLOURS AT NO EXTRA COST

Description	Tread	Overall H x W x D mm	Top tread mm	Weight Kgs	Ref	Ref	Ref	Ref
					Grey	Red	Blue	Yellow
Two step	R/Rubber	1025 x 455 x 605	510	7	S028/G	S028/R	S028/B	S028/Y
	Anti-slip	1025 x 455 x 605	510	7	S241/G	S241/R	S241/B	S241/Y
Three step	R/Rubber	1310 x 455 x 785	762	10	S029/G	S029/R	S029/B	S029/Y
	Anti-slip	1310 x 455 x 785	762	10	S242/G	S242/R	S242/B	S242/Y

Double sided mobile 2 step

Stylish and colourful mobile two-step units with dome covered spring loaded castors, with grey non-marking tyres.

Model		2 sided 1 handle	2 sided 2 handles		
Average working height		2.00m	2.00m		
Platform height	mm	460	460		
Platform width	mm	355	355		
Platform depth	mm	230	230		
O/all H (inc rails)	mm	1035	1035		
O/all width	mm	545	545		
O/all depth	mm	695	695		
Weight	kgs	11	13		
Treads		Ribbed Rubber	Anti-slip	Ribbed Rubber	Anti-slip
Green	Ref	S007/GN	S008/GN	S247/GN	S249/GN
Yellow	Ref	S007/Y	S008/Y	S247/Y	S249/Y
Blue	Ref	S007/B	S008/B	S247/B	S249/B
Red	Ref	S007/R	S008/R	S247/R	S249/R
Grey	Ref	S007/GY	S008GY	S247/GY	S249/GY

- Choice of single or double grab rail
- Choice of ribbed rubber or anti-slip treads
- Choice of five colours



Single sided mobile 2 step

Single sided units without handrail, single grab handle, or twin side handrails and cross bar.

Crossbar accepts optional accessories - hook-on basket or tray.



Model		1 sided without grabrail	1 sided 1 grabrail	1 sided 2 handles	
Average working ht.		2.00m	2.00m	2.00m	
Platform height	mm	508	508	508	
Platform width	mm	380	380	380	
Platform depth	mm	180	180	180	
O/all H (inc rails)	mm	610	1185	1185	
O/all width	mm	530	530	530	
O/all depth	mm	540	540	540	
Weight	kgs	8	10	12	
Treads		Ribbed Rubber	Anti-slip	Ribbed Rubber	Anti-slip
Green	Ref	S001/GN	S002/GN	S003/GN	S004/GN
Yellow	Ref	S001/Y	S002/Y	S003/Y	S004/Y
Blue	Ref	S001/B	S002/B	S003/B	S004/B
Red	Ref	S001/R	S002/R	S003/R	S004/R
Grey	Ref	S001/GY	S002/GY	S003/GY	S004/GY
Sandstone	Ref	S001/S	S002/S	S003/S	S004/S

Accessories

Only suitable for S248/S251

Hook-on wire basket

(load capacity 3 kg)

L x W x D: 350 x 220 x 220 mm

White powder coated finish

Ref **S015**

Hook-on tray unit

(load capacity 3 kg)

L x W x D: 415 x 260 x 40 mm

White powder coated finish

Ref **S250**

Classic Colour Range

Close fitting continuous single rail guard around top platform, extending down each side of stairway as a short handrail.

General Specification:

All Classic models are fully welded throughout and available with ribbed rubber or anti-slip treads

Finish: All colour finishes are hardwearing powder coated.




CHOICE OF COLOURS AT NO EXTRA COST

Treads (inc platform)	2	3	4	5
Average working height	2.0m	2.26m	2.52m	2.77m
Platform height	508 mm	762 mm	1016 mm	1270 mm
Platform width	380 mm	380 mm	380 mm	380 mm
Platform depth	280 mm	280 mm	280 mm	280 mm
O/all H (inc rails)	1185 mm	1425 mm	1683 mm	1940 mm
O/all width	580 mm	580 mm	580 mm	580 mm
O/all depth	540 mm	795 mm	955 mm	1120 mm
Weight	12 kgs	14 kgs	17 kgs	20 kgs
Ribbed rubber treads				
White	Ref S005/W	S009/W	S011/W	S013/W
Grey	Ref S005/GY	S009/GY	S011/GY	S013/GY
Light Blue	Ref S005/B	S009/B	S011/B	S013/B
Red	Ref S005/R	S009/R	S011/R	S013/R
Green	Ref S005/GN	S009/GN	S011/GN	S013/GN
Yellow	Ref S005/Y	S009/Y	S011/Y	S013/Y
Orange	Ref S005/OR	S009/OR	S011/OR	S013/OR
Sandstone	Ref S005/S	S009/S	S011/S	S013/S
Anti-slip treads				
White	Ref S006/W	S010/W	S012/W	S014/W
Grey	Ref S006/GY	S010/GY	S012/GY	S014/GY
Light Blue	Ref S006/B	S010/B	S012/B	S014/B
Red	Ref S006/R	S010/R	S012/R	S014/R
Green	Ref S006/GN	S010/GN	S012/GN	S014/GN
Yellow	Ref S006/Y	S010/Y	S012/Y	S014/Y
Orange	Ref S006/OR	S010/OR	S012/OR	S014/OR
Sandstone	Ref S006/S	S010/S	S012/S	S014/S

Classic Castors system

Fitted with dome covered spring loaded, 50mm dia swivel castors which retract when weight is applied to the steps, giving firm contact with the floor. Grey non marking tyres. Dome covers have a double rolled bottom edge together with a protective cover strip, giving a neat appearance and reasonable protection to carpets and other floor surfaces.



Optional Accessory

Hook-on wire basket

(load capacity 3 kg)

L x W x D: 350 x 220 x 220 mm

White powder coated finish

Ref **S015**

The steps should not be moved with loaded basket in place.

Classic Plus 5 Colour Range

All models have larger top platform
Platform W x D: 400 x 380mm
Double rail platform guarding
4 and 5 step have long
handrails on both
sides of stairway.



Model
S223Y



Model
S224R

Optional Hook-on wire basket,
see Classic Sandstone for details

CHOICE OF COLOURS AT NO EXTRA COST

Treads (inc platform)		2	3	4	5
Platform height	mm	508	762	1016	1270
O/all H (inc rails)	mm	1175	1430	1680	1935
Platform width	mm	400	400	400	400
Platform depth	mm	380	380	380	380
O/all width	mm	550	550	550	550
O/all depth	mm	650	790	1005	1225
Weight	kgs	11	14	17	20
Ribbed Rubber treads					
Red	Ref	S221R	S222R	S223R	S224R
Yellow	Ref	S221Y	S222Y	S223Y	S224Y
Blue	Ref	S221B	S222B	S223B	S224B
Grey	Ref	S221GY	S222GY	S223GY	S224GY
Green	Ref	S221GN	S222GN	S223GN	S224GN
Anti-slip treads					
Red	Ref	S226R	S227R	S228R	S229R
Yellow	Ref	S226Y	S227Y	S228Y	S229Y
Blue	Ref	S226B	S227B	S228B	S229B
Grey	Ref	S226GY	S227GY	S228GY	S229GY
Green	Ref	S226GN	S227GN	S228GN	S229GN



Model
S221GY



Model
S222B

Mobile Two Steps

Mountable either side so that grab handle can be rack or aisle side.

Retracting castor system.

Choice of ribbed rubber or anti-slip treads.


O/all front-rear: 600 mm

O/all width: 410 mm

Available with or without grab rail.

Hardwearing white powder coated.

Type	Without grab rail	With grab rail
Treads (inc platform)	2	2
Average wkg height	2m	2m
Platform height	460 mm	460 mm
O/all height	530 mm	1035 mm
Platform W x D mm	355 x 230	355 x 230
O/A W x Front-Rear	425 x 615	425 x 615
Weight kgs	9	10
R/R treads Ref	S024	S026
A/S treads Ref	S025	S027

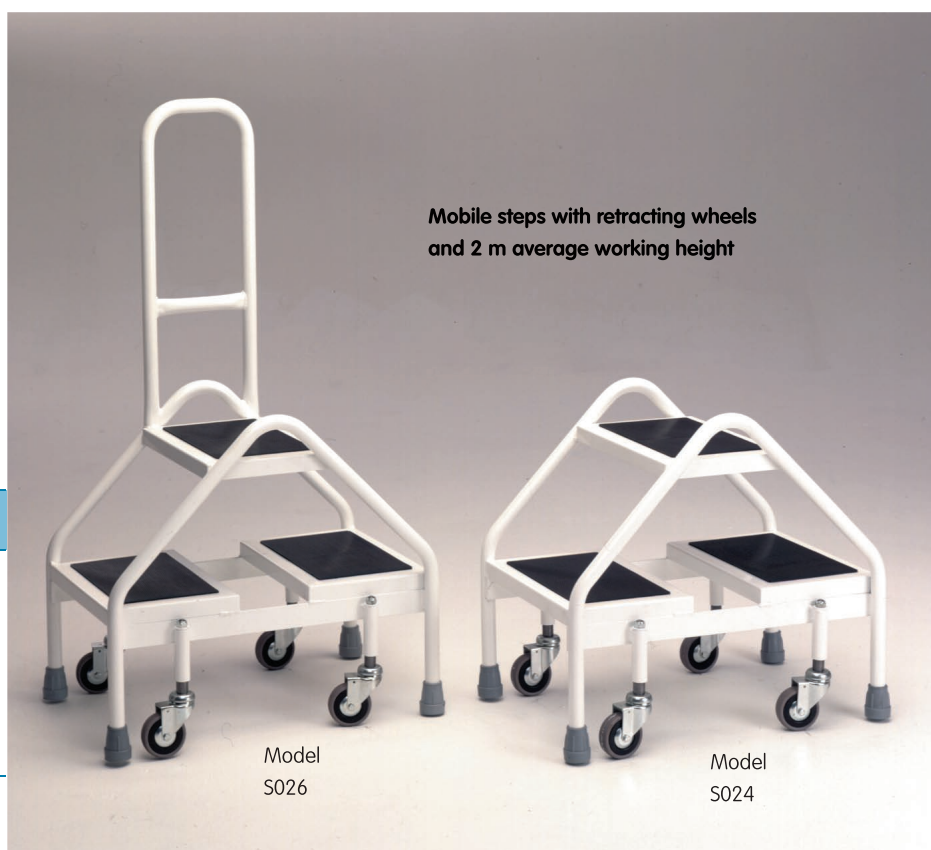

Steptek® DOUBLE-SIDED ACCESS



Mobile 3 and 4 steps



Double sided steps with handrail,
Ribbed rubber treads,
Anti slip tread surface available.

Castors: spring loaded all swivel 75mm dia wheels with grey non marking rubber tyres.

Finish: White powder coating.

Treads (inc platform)	3	4
Average wkg height	2.2m	2.4m
Platform height	685mm	915 mm
Platform W x D mm	500 x 300	500 x 300
O/all height	1575mm	1805 mm
O/all width	570mm	570mm
O/all length	800 mm	980mm
Weight kgs	19	23
Ribbed rubber Ref	S030	S032
Anti-slip Ref	S031	S033

Polar 330 range 2-3-4-5 steps



Model
S234



Model
S034



Model
S036



Model
S038

Model
S238

Easily manoeuvrable steps with generous platform size.
Retracting castor system ensures firm contact with floor when mounted.
Plastic floor pads.
Two-step available with or without support handle.
Choice of ribbed rubber or anti-slip treads.
Hard-wearing white powder coated finish.



		without grab rail	with grab rail			
Treads (inc platform)		2	2	3	4	5
Average working height		2m	2m	2.2m	2.4m	2.6m
Platform height	mm	460	460	690	920	1155
O/all H (inc rails)	mm	545	1105	1470	1700	1940
Platform width	mm	457	457	457	457	457
Platform depth	mm	330	330	330	330	330
O/all width	mm	535	535	535	535	535
O/all depth	mm	520	520	655	790	900
Weight	kgs	11	12	18	20	22
Ribbed Rubber treads	Ref	S034	S234	S036	S038	S238
Anti-slip treads	Ref	S035	S235	S037	S039	S239

Steptek® STAINLESS STEPS

A selected standard range, easy to clean, for use where hygiene is essential. Particularly suitable for food, drink and chemical industries. Stainless treads have anti-slip surfaces, resistant to water, oil and most chemicals. Other models can be manufactured on request.

Portable Static

Strong stainless steel construction with anti-slip treads.

Stainless Portable and Mobile Two Steps

MOBILE

Manufactured from stainless steel, Retracting castor system.

Anti-slip treads.

Mountable either side so that grab handle can be rack or aisle side.

O/all front-rear: 600 mm

O/all width: 410 mm

Available with or without grab rail.

Type	Static	Mobile Without grab rail	Mobile With grab rail
Treads (inc platform)	2	2	2
Average wkg height	2m	2m	2m
Platform height	385 mm	460 mm	460 mm
O/all height	1030 mm	530 mm	1035 mm
Platform W x D mm	280 x 140	355 x 230	355 x 230
O/A W x Front-Rear	355 x 500	425 x 615	425 x 615
Weight kgs	7	9	10
Ref	S210	S211	S212



Model
S212

Model
S210

Stainless Wheelalong two and three steps

Static steps which are fitted with 75mm dia wheels to the rear frame. When steps are tilted, wheels allow easy movement to next location.

Manufactured from formed tube, and stainless steel sheet steps with anti-slip surface.

75 mm wheels fitted with grey non marking rubber tyres.

Description	Overall H x W x D mm	Top tread mm	Weight Kgs	Ref Grey
Two step	1025 x 450 x 605	510	7	S213
Three step	1310 x 450 x 785	762	10	S214



Model
S214

Model
S213

Stainless Three, four and five step



Stainless steel mobile step units with close fitting handrail round three sides of platform.

Model
S217

High quality range of mobile step units, manufactured from formed tube and sheet stainless steel of quality particularly suitable for food drink and chemical industries. Fully welded throughout for maximum rigidity.

Model
S216

Model
S215

All step units fitted with 4 x 50mm dia spring loaded castors with grey non marking rubber tyres fitted in heavy zinc plated housing which retract when weight is applied to the steps, giving firm contact with the floor.
Anti-slip tread surfaces.
Each unit is fitted with four grey non marking rubber feet.
Stainless steel treads covered with anti-slip surface which is both hard wearing and resistant to water, oil and most chemicals.

Treads (inc platform)	3	4	5
Average working height	2.26m	2.52m	2.77m
Platform height	mm 765	mm 1016	mm 1270
Platform width	mm 380	mm 380	mm 380
Platform depth	mm 280	mm 280	mm 280
O/all H (inc rails)	mm 1425	mm 1683	mm 1940
O/all width	mm 680	mm 680	mm 680
O/all depth	mm 710	mm 885	mm 1140
Weight	kgs 14	kgs 17	kgs 20
Ref	S215	S216	S217



Other stainless steel steps can be made to order, all enquiries are welcome.



Model S044



Model S040



Model S048

Steptek®
PREMIER
COMMERCIAL
 3, 4 and 5 step
 mobiles

48
HOURS
 DESPATCH

All welded steel construction
 Spring loaded castors lower to the ground under operator's weight.
 Red epoxy finish.

Treads: formed from sheet steel with choice of tread surfaces.

Treads (inc platform)		3	4	5
Average working height		2.21m	2.44m	2.65m
Platform height	mm	685	915	1145
Platform width	mm	560	560	560
Platform depth	mm	340	340	340
O/all H (inc rails)	mm	1530	1760	1985
O/all width	mm	640	640	640
O/all depth	mm	695	850	1000
Weight	kgs	24	28	32
Ribbed rubber treads	Ref	S040	S044	S048
Anti-slip treads	Ref	S041	S045	S049
Punched treads	Ref	S042	S046	S050
Aluminium treads	Ref	S043	S047	S051

Ribbed rubber
 (standard)

Anti-slip (option)

Punched steel
 (option)

Aluminium (option)

Steptek Quality Blue Range Choice of 610mm or 760mm tread width

Hand built with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.

All steelwork blue epoxy finish.

Wheels: Front swivel and rear fixed castors with 100 mm dia. white nylon wheels. Roller bearings.

All models fitted with hand lock anchorage, when locked the front feet rest firmly on the floor; fitted with protective plastic floor pads.

Tread choices

Ribbed rubber (standard) Expamet (option) Anti-slip (option) Punched (option)

Accessories

Hook-on wire basket (capacity 5kg)
L x W x D: 600 x 250 x 220 mm
Ref **S088** (Extra)

Hook-on tool tray (capacity 5kg)
L x W x D: 600 x 250 x 220 mm
Ref **S089** (Extra)



Retracting castors (fitted as standard)



Model S054

Tread width 610 mm. Platform W x D 610 x 457 mm

Number of treads inc platform	Average working height	Platform height mm	Overall H x W x D mm	Ribbed Rubber treads		Expamet treads		Anti-slip treads		Punched treads	
				Ref	wt. kg.	Ref	wt. kg.	Ref	wt. kg.	Ref	wt. kg.
4	2400 mm	915	1830 x 760 x 1085	S052	45	S061	45	S070	45	S079	43
5	2700 mm	1145	2060 x 760 x 1260	S053	50	S062	50	S071	50	S080	48
6	2900 mm	1370	2285 x 760 x 1435	S054	56	S063	56	S072	56	S081	53
7	3100 mm	1600	2515 x 760 x 1690	S055	65	S064	65	S073	65	S082	62
8	3400 mm	1830	2745 x 760 x 1865	S056	70	S065	70	S074	70	S083	67
9	3600 mm	2060	2975 x 760 x 2045	S057	76	S066	76	S075	76	S084	73
10	3800 mm	2285	3200 x 760 x 2225	S058	88	S067	88	S076	88	S085	84
11	4000 mm	2515	3430 x 760 x 2400	S059	96	S068	96	S077	96	S086	91
12	4300 mm	2745	3660 x 760 x 2580	S060	104	S069	104	S078	104	S087	99

Tread width 760 mm. Platform W x D 760 x 457 mm

Number of treads inc platform	Average working height	Platform height mm	Overall H x W x D mm	Ribbed Rubber treads		Expamet treads		Anti-slip treads		Punched treads	
				Ref	wt. kg.	Ref	wt. kg.	Ref	wt. kg.	Ref	wt. kg.
5	2700 mm	1145	2060 x 915 x 1260	S090	60	S100	56	S110	60	S120	58
6	2900 mm	1370	2285 x 915 x 1435	S091	66	S101	62	S111	66	S121	64
7	3100 mm	1600	2515 x 915 x 1690	S092	76	S102	72	S112	76	S122	74
8	3400 mm	1830	2745 x 915 x 1865	S093	84	S103	79	S113	84	S123	82
9	3600 mm	2060	2975 x 915 x 2045	S094	91	S104	86	S114	91	S124	88
10	3800 mm	2285	3200 x 915 x 2225	S095	105	S105	99	S115	105	S125	102
11	4000 mm	2515	3430 x 915 x 2400	S096	114	S106	107	S116	114	S126	110
12	4300 mm	2745	3660 x 915 x 2580	S097	123	S107	115	S117	123	S127	118
13	4500 mm	2975	3890 x 915 x 2755	S098	130	S108	122	S118	130	S128	127
14	4700 mm	3200	4115 x 915 x 2935	S099	138	S109	130	S119	138	S129	134

Handlock Anchorage

Steptek Quality Red Range

560mm tread width

Hand built with attention to detail, both in design and manufacture, to ensure total reliability and many years of arduous operation.

Welded steel tube and bar construction.

Fitted with hand lock anchorage; when locked the front feet rest firmly on the floor, feet fitted with protective plastic floor pads.

Outboard axle mounted rear wheels gives extra stability.

Finish: All steelwork red epoxy finish.

Wheels: Front 2 swivel castors with 100 mm dia. rubber tyred wheels with roller bearings. Rear 2 axle mounted 200 mm dia. wheels with rubber tyres and roller bearings.

Accessories

Lower gate

Fully welded hinged steel tube gate fitted to bottom of steps (not removable). Gate folds back through 270°. Fitted with padlock facility (padlock not supplied)
Ref **S170** (Extra)

Hook-on tool tray

(capacity 5kg) L x W x D: 600 x 250 x 220 mm
Ref **S089** (Extra)

Hook-on wire basket

(capacity 5kg) L x W x D: 600 x 250 x 220 mm
Ref **S088** (Extra)



Model S162

Platform gate option

Inward opening spring loaded platform gate, with spring loaded plunger bolt, to fit at the end, or either side of the top platform. The gate closes against a vertical retention plate. Option adds to length of platform and o/a length: 5-9 tread +380mm 10-14 tread +300mm Ref **S175** (Extra)

A caution notice is fitted to each set to remind user of operation procedure.

A health and safety at work information sheet is supplied.

Hand lock anchorage; when locked the front feet rest firmly on the floor

Tread width 560 mm. Platform W x D: 5-9 steps 560 x 380 mm; 10-14 steps 560 x 460 mm

Tread choices

No. of treads inc platform	Average working height	Platform height mm	Overall H x W x D mm	Ribbed rubber treads		Punched treads		Anti-slip treads		Aluminium treads	
				Ref	wt.	Ref	wt.	Ref	wt.	Ref	wt.
5	2750 mm	1250	2165 x 850 x 1220	S130	53	S140	51	S150	53	S160	54
6	3000 mm	1500	2415 x 850 x 1400	S131	58	S141	56	S151	58	S161	60
7	3250 mm	1750	2665 x 850 x 1580	S132	63	S142	61	S152	63	S162	65
8	3500 mm	2000	2915 x 850 x 1760	S133	70	S143	68	S153	70	S163	73
9	3750 mm	2250	3165 x 850 x 1940	S134	76	S144	73	S154	76	S164	78
10	4000 mm	2500	3415 x 1000 x 2200	S135	89	S145	85	S155	89	S165	92
11	4250 mm	2750	3665 x 1000 x 2380	S136	98	S146	94	S156	98	S166	101
12	4500 mm	3000	3915 x 1000 x 2560	S137	110	S147	106	S157	110	S167	113
13	4750 mm	3250	4165 x 1250 x 2740	S138	117	S148	112	S158	117	S168	121
14	5000 mm	3500	4415 x 1250 x 2920	S139	124	S149	120	S159	124	S169	127
15 - 20	Please ask for details										

storwell

■ ■ ■ S Y S T E M S



More storage in less space

Working with a specialist partner with over 28 years experience in the storage sector is just one reason why you can trust Storwell Systems with your enquiries.

We are **objective, non-tied, independent, and impartial** and continually researching all the leading UK manufacturers for product quality and innovation; only selecting those companies whose **integrity, design** and **product range** are the best in the industry so... you don't need to.

You can be sure you will get impartial advice, the best prices and delivery times and a dedicated project manager giving you all the technical support you need for complete peace of mind.

T: 01527 592444 F: 01527 592727
E: sales@storwellsystems.co.uk
W: www.storwelldirect.co.uk