


# REGMATIC

## 3/2 Way Namur Mount Solenoid Valve Series 23

Article No	Voltage
23024AC	24 V AC
23110AC	110 V AC
23220AC	220 V AC
23024DC	24VDC
23048DC	48 V DC
23110DC	110 V DC

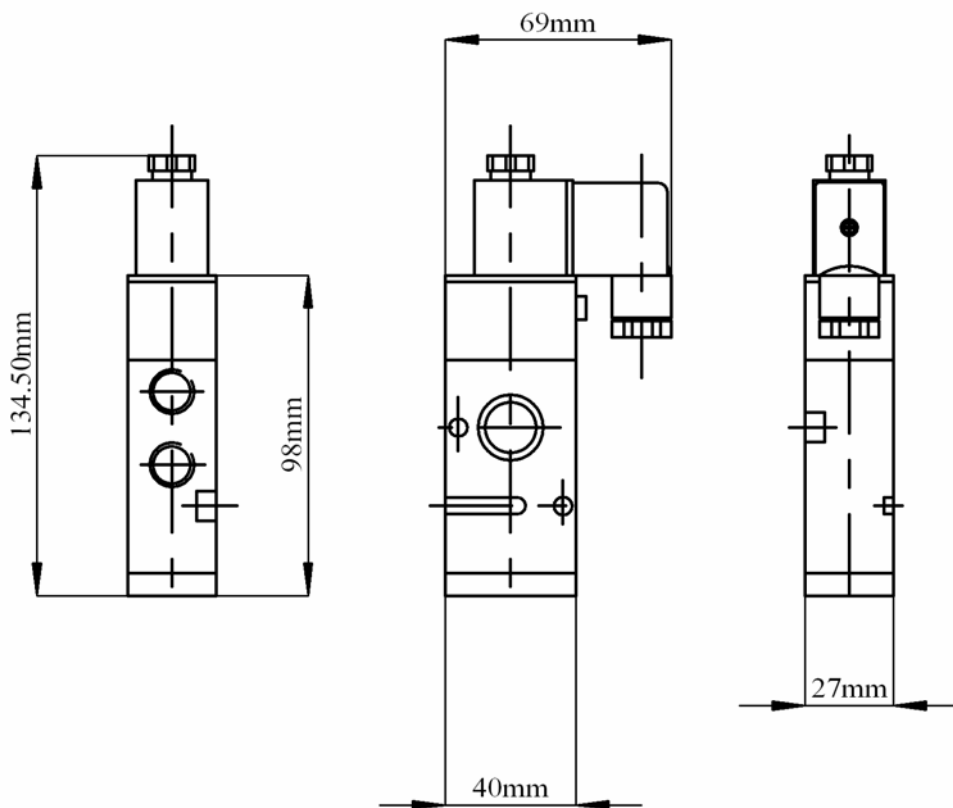

### Technical data:

Protection class IP 65  
 Relative duty cycle 100 %  
 Voltage tolerance +/- 10 %

Working pressure 1.5-8Bar  
 Area 14 mm<sup>2</sup>, cv = 0.78  
 Power consumption AC = 5.5 VA, DC = 4.8 W

Approvals by ATEX, CSA and UL

Can also be supplied with coils for EEx ia 11 T6 and T4 and  
 EEx m 11 T4



Unit 27 Upper Mills Est , Bristol Road  
 Stonehouse . GLOS . GL10 2BJ . UK  
 Tel. 01453 821666 Fax 01453 822298  
 www.cee-vee.co.uk sales@cee-vee.co.uk