



HIGH FREQUENCY ELECTRIC EXTERNAL VIBRATORS


MODEL VTF/VTHF

- Quick release mounting — in use with QR2 or QR4 weld on bracket (supplied separately)
- Cast iron body for strength
- Low loss laminations for electrical efficiency at high frequencies
- IP66.7 enclosure and class F windings
- Suitable for hazardous environments
- Fully adjustable eccentric weights, easily accessible

2 CHAPEL ROAD, PORTSLADE, BRIGHTON, BN41 1PF ENGLAND

Tel. +44(0) 1273 430977 Fax. +44 (0) 1273 430978

Web. www.vibtec.com E-mail. sales@vibtec.com

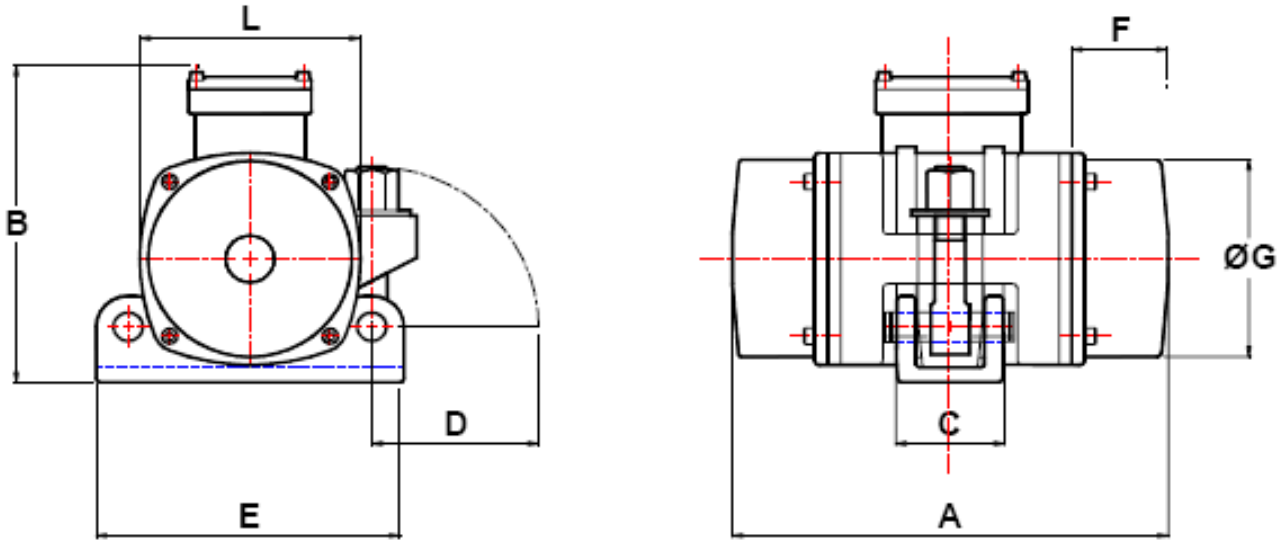

Performance Data

MODEL	Speed RPM	Volts V	Frequency Hz	C/F Kgs	Power W	Current A	Weight Kgs
VTF 3/800 RS	3000	400	50	873	650	1.1	20.5
VTHF 6/500 RS	6000	42	200	515	700	11.3	12
VTHF 6/1000 RS	6000	42	200	925	1050	17	19.3

Dimensions

MODEL	A	B	C	D	E	F	G dia	L	QR Bracket
VTF 3/800 RS	356	218	84	145	240	82	122	126	QR4
VTHF 6/500 RS	291	180	90	105	180	58	102	108	QR2
VTHF 6/1000 RS	294	218	84	145	240	51	122	126	QR4