




---

**PNEUMATIC LINEAR VIBRATORS - CUSHIONED & IMPACTING**

---

**MODEL VTP 25/ FPK-40**

- Linear Vibration
- Force 66 N to 8300 N
- Frequency and amplitude adjustable independently
- Suitable for temperature up to 80 °C
- FPK-40 is designed for lubrication free operation


On request can be supplied with ATEX certification  
To ATEX 95 94/9/EC  II 2 G & D Zone 1, 2 & 21, 22

2 CHAPEL ROAD, PORTSLADE, BRIGHTON, BN41 1PF ENGLAND  
Tel. +44(0) 1273 430977 Fax. +44 (0) 1273 430978  
Web. [www.vibtec.com](http://www.vibtec.com) E-mail. [sales@vibtec.com](mailto:sales@vibtec.com)


**PERFORMANCE DATA**

MODEL	Nominal Frequency RPM			Force N			Air Consumption L/min		
	2 Bar	4 Bar	6 Bar	2 Bar	4 Bar	6 Bar	2 Bar	4 Bar	6 Bar
VTP 25 CUSHIONED	2600	3200	3800	66	164	260	18	56	122
VTP 25 IMPACTING	4780	6900	8380	130	310	500	25	72	160
FPK-40 CUSHIONED	1900	2200	2600	160	350	620	90	130	220
FPK-40 IMPACTING	2400	3500	4300	300	6200	8300	110	180	270

**VTP 25**

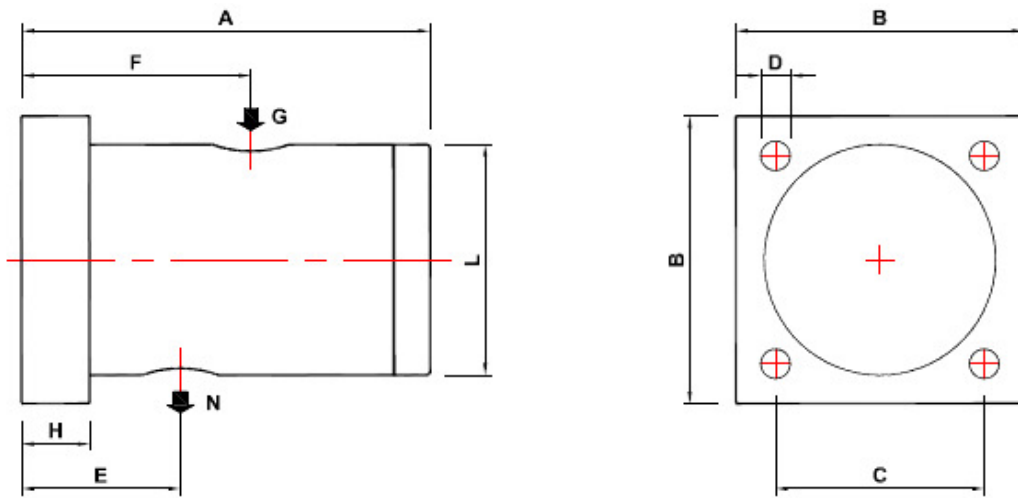

**FPK-40**

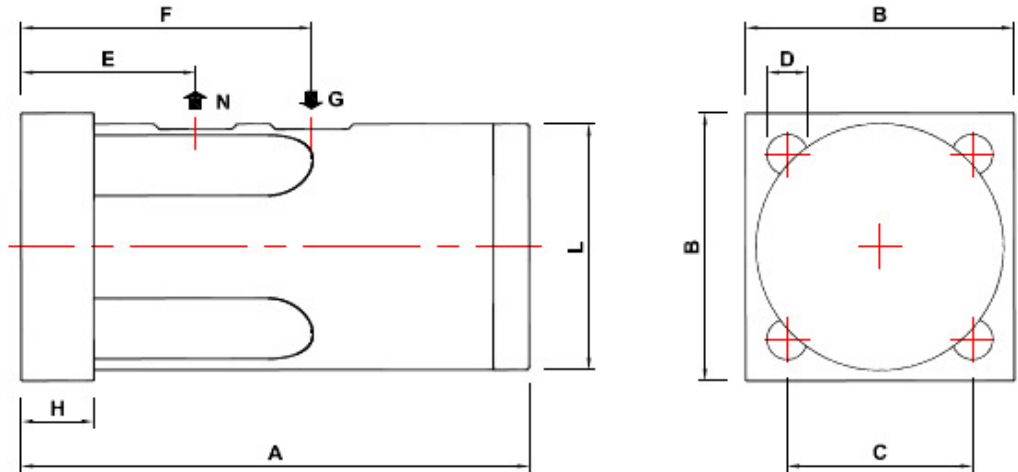

**DIMENSIONS**

MODEL	A mm	B mm	C mm	D mm	E mm	F mm	H mm	L mm	G BSP	N BSP	Wt kgs
VTP 25	90	63.5	46	6.5	35	50.5	15	51	1/8"	1/8"	0.635
FPK-40	140	74	51	11	48	80	20	68	1/4"	1/4"	1.200