


**Lance Holder for oxygen
6 mm – 1.1/4"**

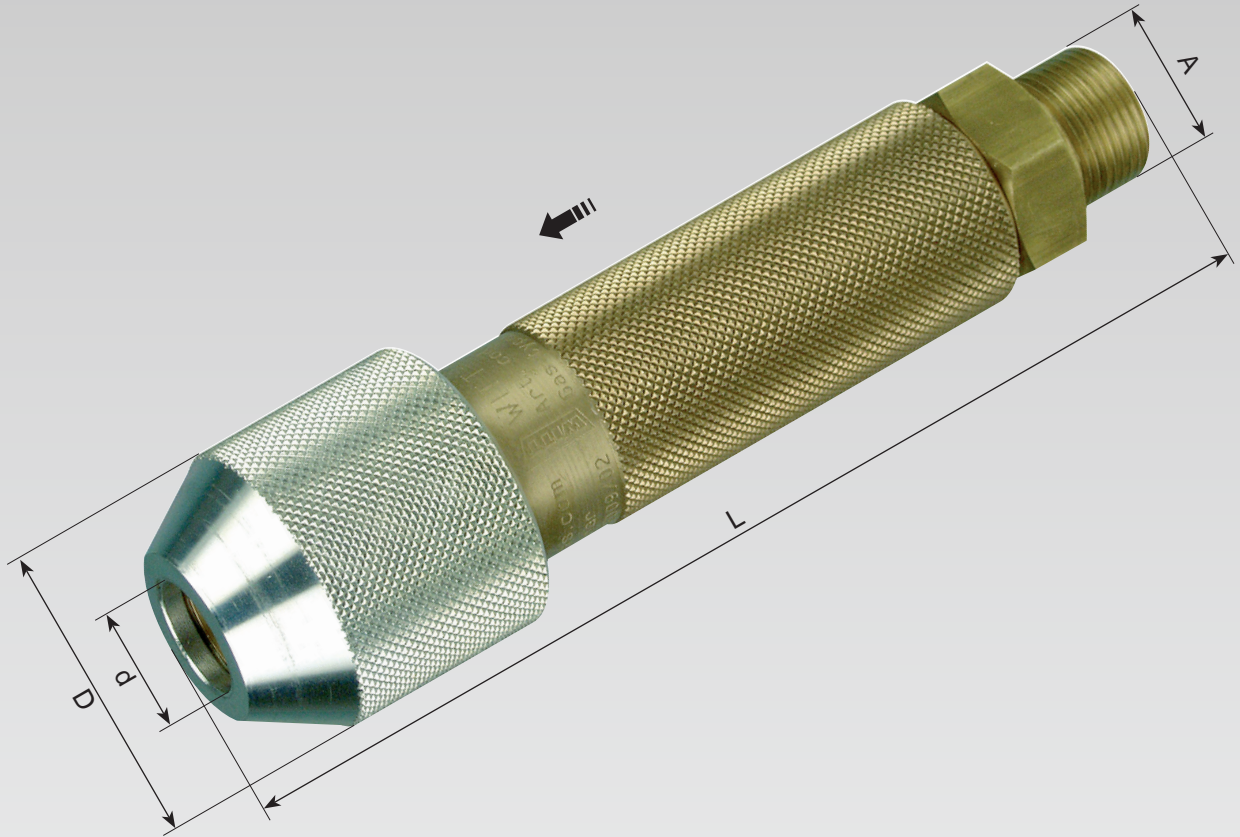

Lance Holder for oxygen

All material in contact with oxygen is bronze or brass. Seals manufactured from abrasion resistant, self extinguishing rubber. Ensures security if inserted lance by the combination of clamp and rubber sleeve.

d Ø Lance		Lance tolerance Ø [mm]	A Inlet connection male with cone [EN560]	D [mm]	L [mm]	Weight [g]	Max. working pressure [bar]	Order-No.
[mm]	[inch]							
6	–	4.8 - 6.3	3/4"	40	135	–	Oxygen (O) 40.0	on request
8	–	6.4 - 8.3	3/4"	40	135	–		on request
10	1/8"	9.1 - 10.2	3/4"	40	135	500		040.996500
13	1/4"	12.0 - 13.7	3/4"	40	135	548		040.996200
17	3/8"	16.0 - 17.2	3/4"	55	175	1.483		040.996100
21	1/2"	20.0 - 21.5	3/4"	55	175	1.460		040.996300
27	3/4"	26.0 - 27.3	1"	60	190	1.800		040.687000
34	1"	32.3 - 34.5	1.1/4"	80	215	–		on request
42	1.1/4"	42.0 - 43.0	1.1/2"	80	215	–		on request

Other connections available on request

Product Information / Technical Data

A01/E0 subject to change