

NON-RETURN VALVES

www.wittgas.com

800-ES



WITT non-return valves for reliable protection against dangerous reverse gas flow. Every non-return valve 100% tested.

Benefits

- a spring loaded non-return valve prevents back feeding of gases which could lead to unwanted gas mixtures
- no leaks – using of a spring loaded valve assembly with elastomer sealing, opening pressure approx. 2 bar
- diverse applications – useful for many technical gases

- the maximum ambient / working temperature is 150 °C / 302 F° (max. 60 °C / 140 °F at oxygen)

Maintenance

- annual testing of the non-return valve and body leak tightness is recommended
- non-return valves are only to be serviced by the manufacturer

Operation / Usage

- non-return valves are used to protect equipment and pipelines against dangerous reverse gas flow
- ideal for use with corrosive gases in the chemical industry, process technology or in the laboratory area
- WITT non-return valves may be mounted in any position /orientation


Approvals

Company certified according to ISO 9001:2000, ISO 14001 and PED 97/23/EC Module H
CE-marked according to:
- PED 97/23/EC

Product Information

Model	Gas	max. working pressure [bar]	Housing-Material	Seal-Material	Weight [g]	Connection [inch]	Order-No.
800-ES	Burn out test for Oxygen (O) at 60 °C gas temperature	240	Stainless steel	Elastomer	730	1/4" NPT	311.002
	Argon (Ar) Compressed air (D) Nitrogen (N) Hydrogen (H) Methane, Natural gas (M)	300					

800-ES

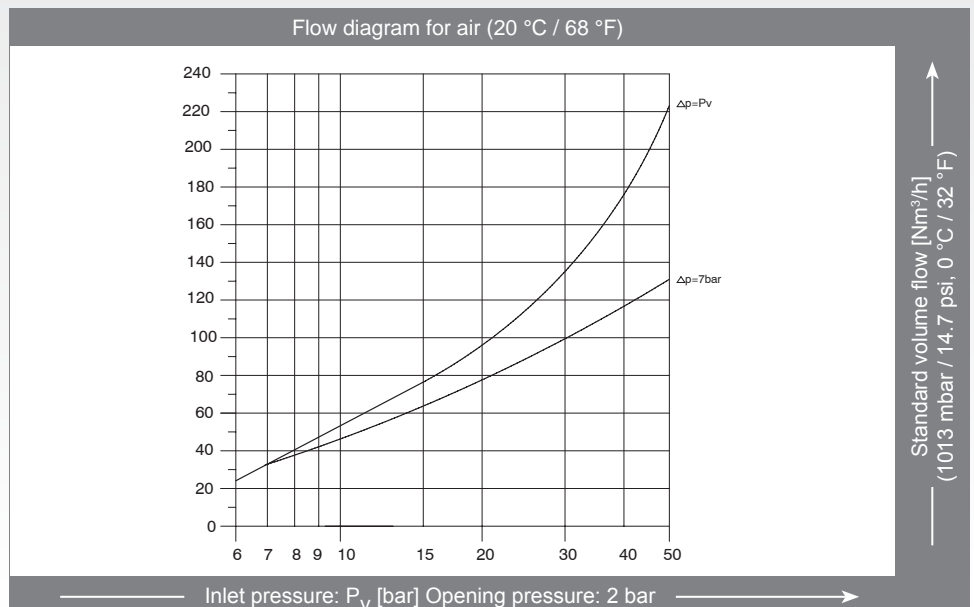

- Conversion factors:
- Argon x 1.27
 - Natural gas x 1.25
 - Methane x 1.33
 - Oxygen x 0.95
 - Nitrogen x 1.00
 - Hydrogen x 3.75

Other connections available on request