



Safety Valve for lance holder

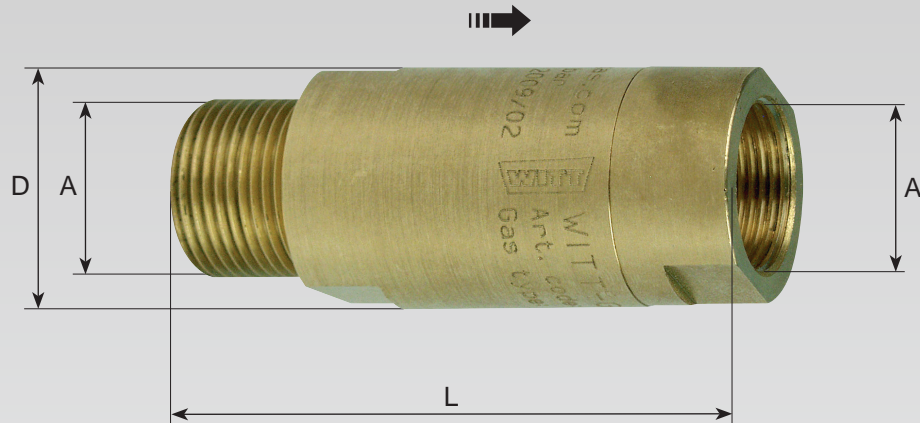

SRV - Safety valve consisting of a non-return valve and a thermal device to shut off oxygen in case of backfire.

| Model | A Inlet connection male with cone according to EN 560 outlet connection female | Ø Lance [inch] | D [mm] | L [mm] | Weight [g] | Max. working pressure [bar] | Order-No. |
|---------|---|-------------------|-----------|-----------|---------------|-----------------------------------|------------|
| SRV 2.1 | 3/4" | up to 3/8" | 36 | 40 | 0.403 | Oxygen (O) 40.0 | 040.996400 |
| SRV 2.2 | 3/4" | 1/2" | 40 | 147 | 1.500 | | 040.686100 |
| SRV 3 | 1" | 3/4" | 48 | 177 | 0.900 | | 040.686200 |
| SRV 4 | 1.1/4" | 1" | 55 | 197 | - | | on request |
| SRV 5 | 1.1/2" | 1.1/4" | 65 | 215 | - | | on request |

Inlet-Reducer with copper-ring for SRV safety valve

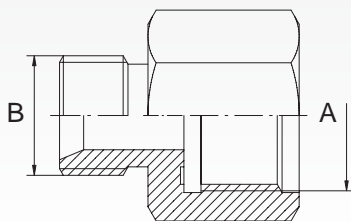

| Connection EN 560 | | Order-No. |
|-------------------|-------------|-------------|
| B Inlet | A Outlet | |
| G 3/8 M with cone | G 3/4 F | 802.339600K |
| G 1/2 M with cone | G 3/4 F | 802.339700K |
| G 3/4 M with cone | G 1 F | 802.418700K |

Other connections available on request

D01/A1 subject to change

Product Information / Technical Data