



# MUNCKHOF

Sinds 1884




BIJ KONINKLIJKE BESCHIKING  
HOFLEVERANCIER



**CUT LABOUR, DIESEL  
AND TRACTOR HOURS BY 66% !**



**3-row  
Orchard Sprayer**

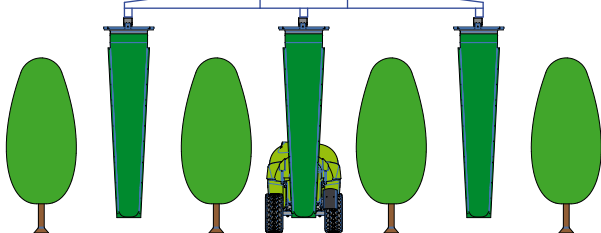

# Munckhof 3-row Orchard Sprayer

(Patent pending)

Technical specifications:

<b>Tank Capacity</b>	<b>1500 L</b>	<b>2000 L</b>
Volume of rinse tank	120 l	100 l
Volume of hand wash tank	15 l	15 l
Tank material	polyethylene	polyester
Sieve in filler opening	X	X
Double level indicator	X	X
Mechanical agitators (3 blades)	X	X
Fully galvanised frame	X	X
Pull-out step	X	X
PTO support	X	X
Nose-wheel	X	X
Mudguards	X	X
Tracking	O	O
Adjustable track width (mm)	1000 – 1250	1250 – 1500
Tandem axle with :	X	X
Tyres: - 295/50 R15	X	X
- 31-13.5x15	O	O
- 26x12 D380	O	O
Hydraulic track width adjustment in rear axle	O	O
Double wide-angle PTO	X	X
Membrane pump CPI04, 104 l/min, 0-50 bar	X	X
Membrane pump CPI04, 150 l/min, 0-50 bar	O	O
Large pressure gauge (100 mm)	X	X
Pressure and suction filter	X	X
Connection for spray gun	X	X
Hydraulically operated support frame	X	X
Height under support frame 4.00 m	X	X
Hydraulic row width adjustment 2.90 ~ 3.50 m	X	X
Hydraulic row width adjustment 3.40 ~ 4.00 m	O	O
Air bags:		
Hydraulically driven fan (one per bag)	X	X
Trimatic anti-drip spray nozzle holders	X	X
Up to 3.5 m spray height	X	X
Up to 4.0 m spray height	O	O
PTO output required	65 HP	65 HP
Weight	1760 kg	1860 kg

X = Standard    O = Optional

## Machinefabriek J.M. van den Munckhof B.V.

Meterikseweg 115  
 NL – 5961 CV Horst  
 Tel. +31 (0) 77 – 398 1001  
 Fax +31 (0) 77 – 398 6485  
[info@munckhof.org](mailto:info@munckhof.org)  
[www.munckhof.org](http://www.munckhof.org)

