

MUNCKHOF




1884

MUNCKHOF



1884

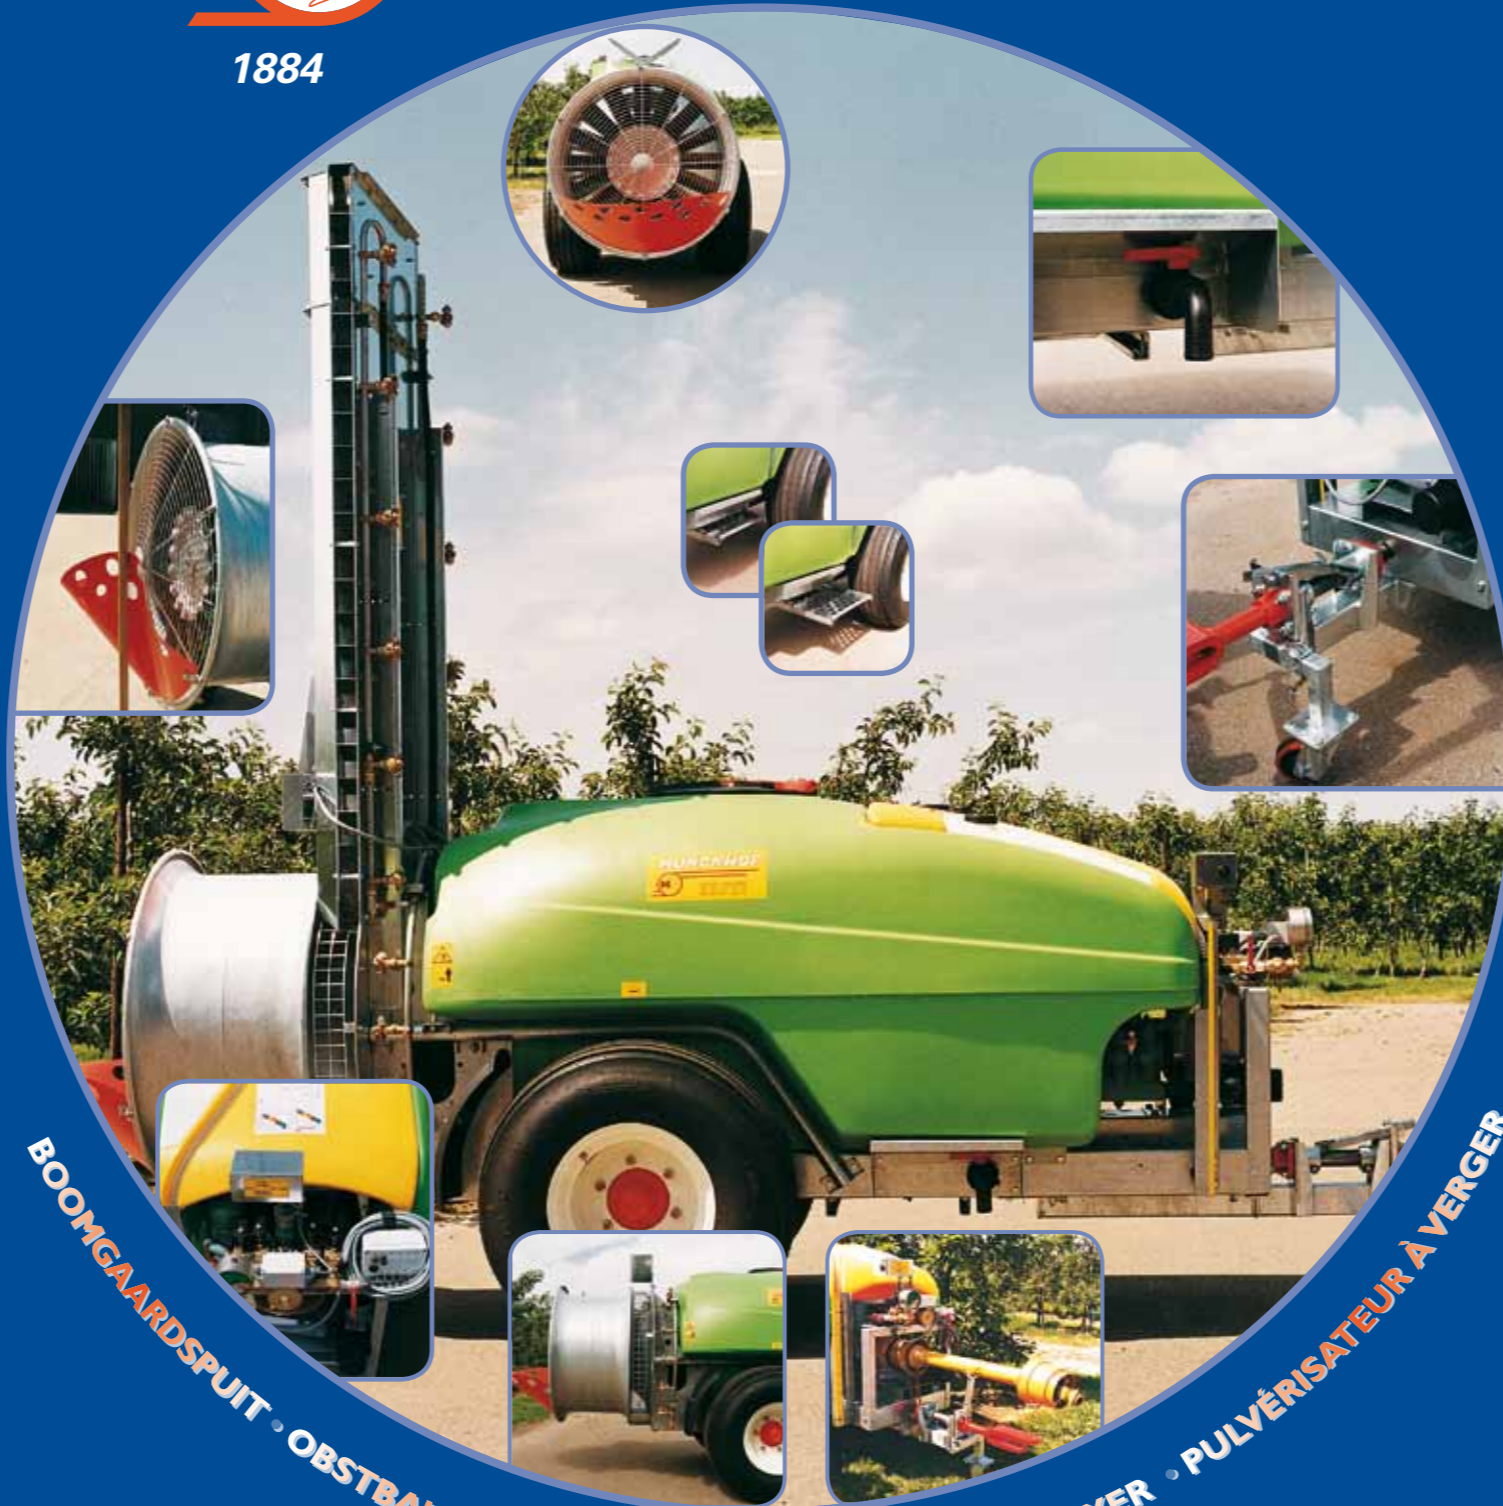


BOOMGAARDSPUIT • OBSTBAU SPRÜHMASCHINE • ORCHARD SPRAYER • PULVÉRISATEUR À VERGER

BOOMGAARDSPUIT • OBSTBAU SPRÜHMASCHINE • ORCHARD SPRAYER • PULVÉRISATEUR À VERGER

Munckhof B.V.
 Meterikseweg 115
 NL-5961 CV HORST
 Tel.: +31 (0)77-398 10 01
 Fax: +31 (0)77-398 64 85
 info@munckhof.org
 www.munckhof.org

Uw distributeur:

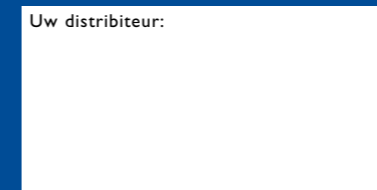

1000 - 1500 - 2000 Ltr

Munckhof Orchard Sprayers

Synonym for:

- quality
- reliability
- high savings

Strong points Munckhof sprayers:

- electric valves: commands on / off are executed without delay
- compactly built
- tank can be emptied very well < 6 litre remain
- low in weight
- low centre of gravity
- rinsing tank of 120 litre
- mechanic mixer, no foam, continuous stirring
- galvanised frame
- big and large tyres, 31-13,5x13, take care of an excellent roadholding
- slow running plunger pump, made for a long life
- double wide angle PTO-shaft
- good distribution of air outflow from fan
- very smooth surface in the tank which prevents spray agent to stick on it
- filling opening is well accessible because of extending step
- air guiding blades in fan casing to stabilise the air
- excellent closed spraying screen



Technical specification

	1000 Ltr.	1500 Ltr.	2000 Ltr.
Tank capacity	1000 Ltr.	1500 Ltr.	2000 Ltr.
Fully galvanised frame	X	X	X
Tank material	polyethylene	polyethylene	polyester
Capacity rinsing tank	120 Ltr.	120 Ltr.	100 Ltr.
Capacity hand washing tank	15 Ltr.	15 Ltr.	15 Ltr.
Extending step	X	X	X
Variable track	1000 - 1250	1000 - 1250	1250-1500
Low pressure tyres 31-13,5x15	X	X	X
Mudguards	X	X	X
Portal shaft (60 mm)	X	X	X
Double wide angle PTO-shaft	X	X	X
Double hose liquid meter with contrast liquid	X	X	X
Mechanic mixer, 3 blades	X	X	X
Pressure filter	X	X	X
Sieve in fill opening	X	X	X
Suction filter	X	X	X
Connection for spraying gun	X	X	X
Fan casing + air guiding blades*	X	X	X
Angle fan blades 40°	X	X	X
Angle fan blades 35° or 45° (on request)	X	X	X
Gearbox with 2 gears and free position	X	X	X
Large manometer (100 mm) logarithmic	X	X	X
Support wheel	X	X	X
Support PTO shaft	X	X	X
Leaf catcher	X	X	X
Synthetic fan (16 blades)	X	X	X
Membrane pump:			
CP 104 / 104 l/min, 0-50 bars	O	O	O
Plunger pumps:			
WM 70 / 70 l/min, 0-60 bars	O	O	O
WM 80 / 80 l/min, 0-40 bars	O	O	O
Required tractor capacity	35 - 55 PK	35 - 55 PK	35 - 55 PK
Diameter fan casing in mm	800	800	800

X = standard O = option * = galvanised

Options:

Aluminium fan (8 blades)	
Tank cleaner with high pressure	
Package cleaner	
Tank fill system (2" hose)	
Chemical mixer in fill sieve	
Spray gun 0.60 m with 10 m hose	
Hydraulic brake system (at request)	
Automatic tracking system	
Cross flow casing:	2,10 meter*
	2,75 meter*
	3,05 meter*
	Triple Fan
Hydraulic operation Triple Fan	
Set of remote controlled electric valves	
2nd set of remote controlled electric valves	
Electrical pressure setting remote controlled	
Computer	
Spray monitor LH1200 / LH4000	
Flowmeter (aluminium)	
Lighting set	
12 spray nozzles Trimatic ALBUZ non - drop instead of 10	
Weed spray boom	
Hop air guide set	

* = galvanised