




Microdot

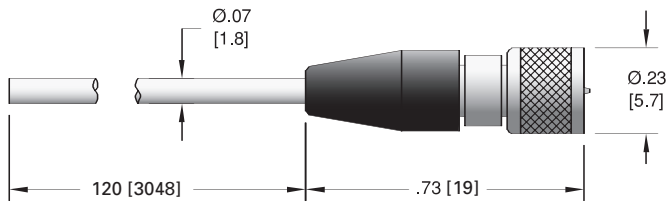


SMB

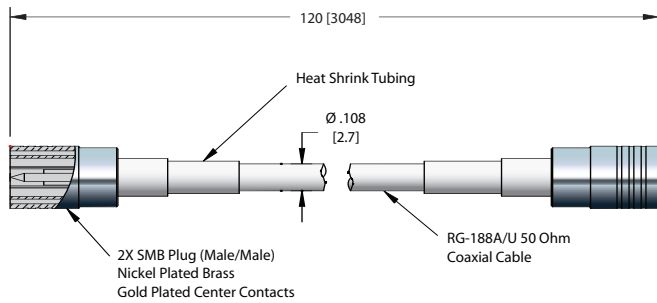


SMA

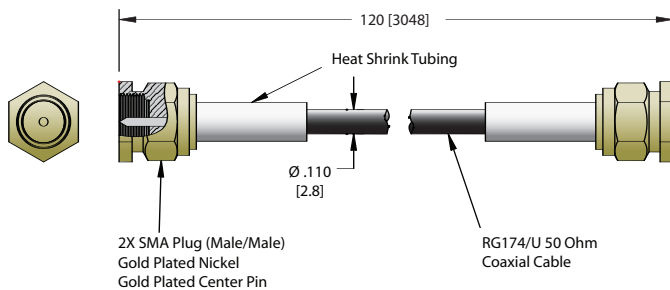


BNC

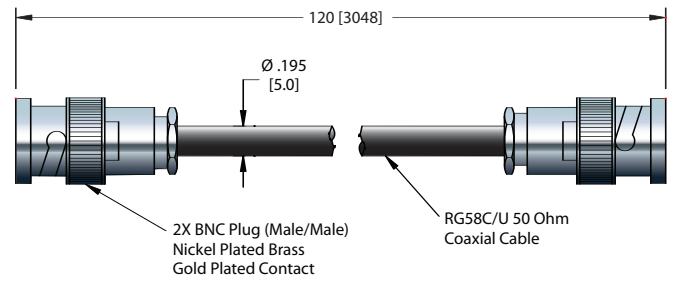


MHV

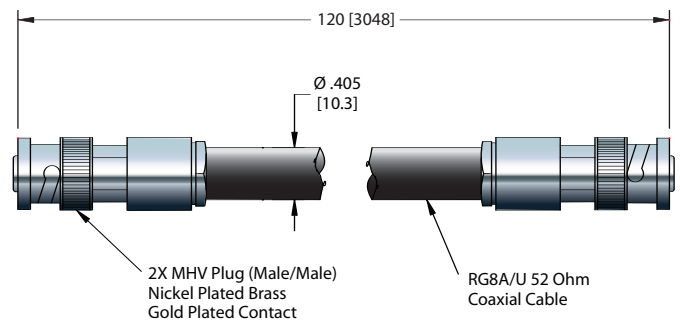

Type N

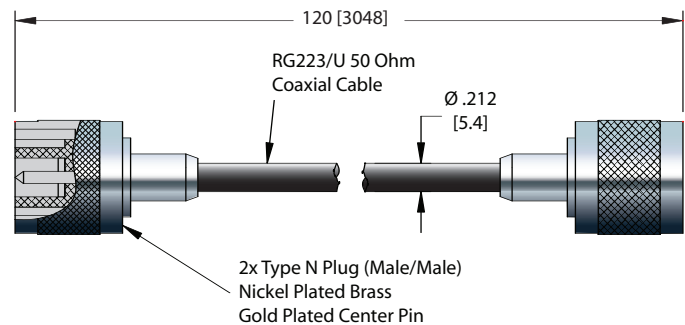

SHV - 5 KV

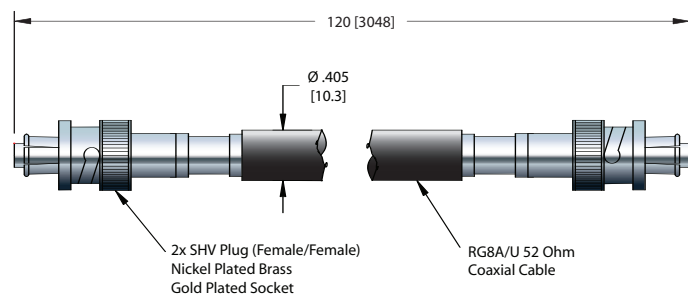



Single Ended
Microdot

TYPE	CABLE	CABLE LENGTH	VOLTAGE DC	CONDUCTOR AMPS	TEMPERATURE °C MIN	TEMPERATURE °C MAX	PART NUMBER
Microdot	RG196A/U	10'	1 kV	2	-65	125	14544-01-A



Double Ended
SMB

50 Ohm SMB	RG188A/U	10'	500 V	2	-70	200	21618-01-A
------------	----------	-----	-------	---	-----	-----	------------



Double Ended
SMA

50 Ohm SMA	RG174/U	10'	500 V	5	-45	75	21617-01-A
------------	---------	-----	-------	---	-----	----	------------



Double Ended
BNC

50 Ohm BNC	RG58C/U	10'	500 V	5	-40	85	18921-01-A
------------	---------	-----	-------	---	-----	----	------------



Double Ended
MHV

52 Ohm MHV	RG8A/U	10'	5 kV	10	-55	85	18921-02-A
------------	--------	-----	------	----	-----	----	------------



Double Ended
Type N


50 Ohm Type N	RG223/U	10'	1.5 kV	5	-40	60	21619-01-A
---------------	---------	-----	--------	---	-----	----	------------




Double Ended
SHV – 5 KV

52 Ohm SHV	RG8A/U	10'	5 kV	10	-55	85	18921-03-A
------------	--------	-----	------	----	-----	----	------------


Micro HV

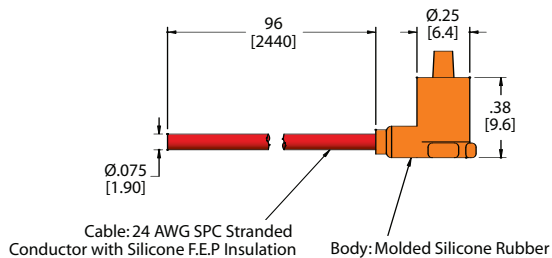


.250 Power Plug

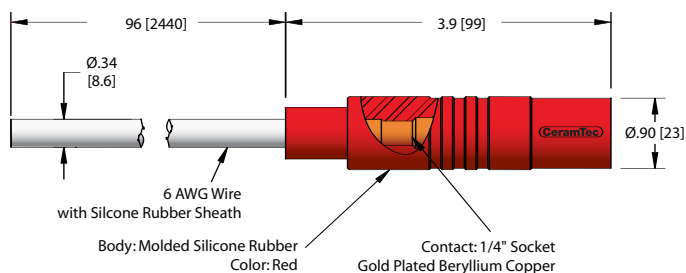


Mini HV

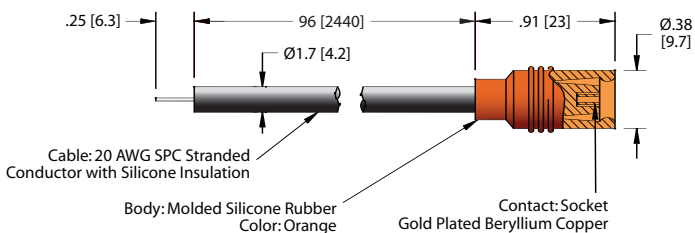


High Voltage – 40 KV

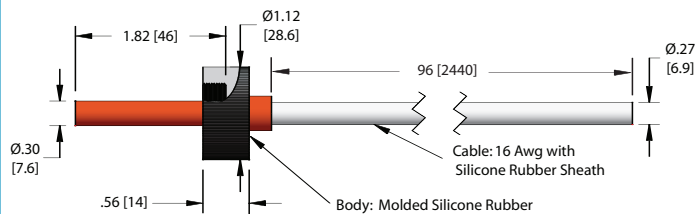


10 kV Power Plug

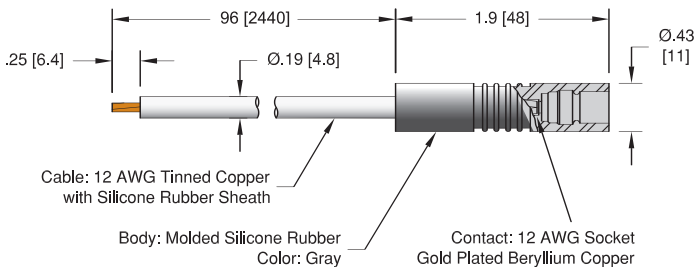


High Voltage – 50 KV

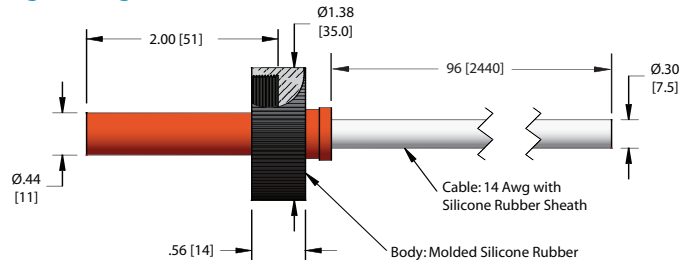

20 KV Power Plug

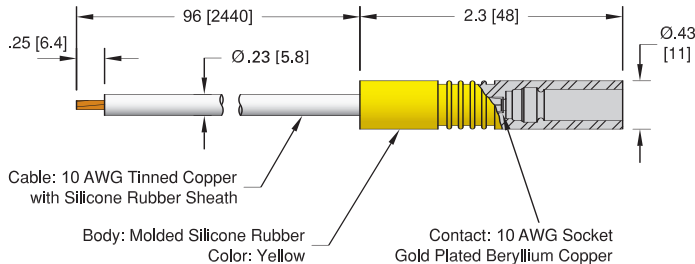

.154 Power Plug

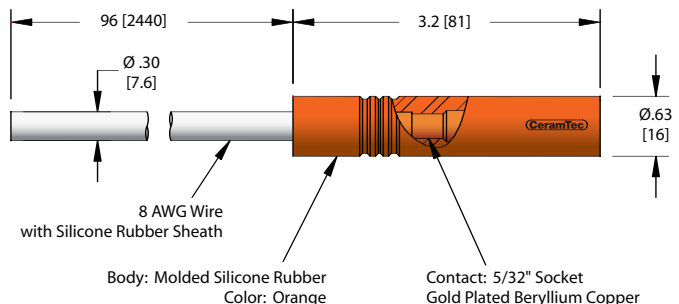



TYPE	CABLE TYPE	LENGTH	VOLTAGE DC	CONDUCTOR AMPS	TEMPERATURE °C		PART NUMBER
					MIN	MAX	
Micro HV	24 AWG	8'	10 kV	3	-55°C	125°C	21039-01-A



Mini HV	20 AWG	8'	15 kV	7.5	-55°C	125°C	21119-01-A
---------	--------	----	-------	-----	-------	-------	------------



10 kV Power Plug	12 AWG	8'	10 kV	30	-55°C	125°C	14418-02-A
20 kV Power Plug	10 AWG	8'	20 kV	55	-55°C	125°C	14419-02-A
.154 Power Plug	8 AWG	8'	10 kV	75	-55°C	125°C	21094-01-A
.250 Power Plug	6 AWG	8'	25 kV	100	-55°C	125°C	20956-02-A



40 kV Air Side	16 AWG	8'	40 kV	10	-55°C	125°C	21034-01-A
50 kV Air Side	14 AWG	8'	50 kV	10	-55°C	125°C	21112-01-A