

August 13, 2008

Mr. Curt Ence
Filtakleen International
220 West Cottage
Sandy, UT 84070

SUBJECT: Letter Report for Southwest Research Institute® Project No. 08.13507.18.001,
“ISO 23556 Soot Removal Test Results”

Dear Mr. Ence:

The soot removal efficiency as performed per ISO/TS 23556 for the Filtakleen filtration system was 21.3%. The efficiency as a function of time is shown in Figure 1.


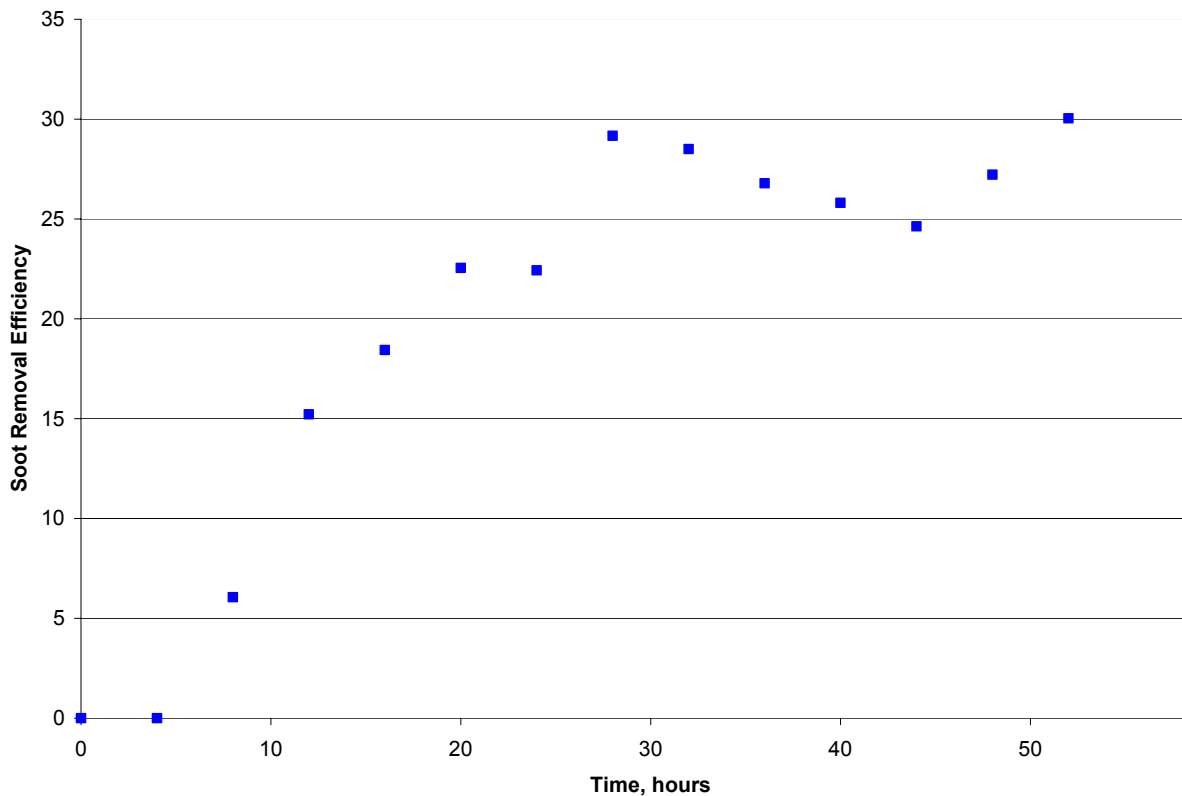


Figure 1. Soot Removal Efficiency as a Function of Time, %



If you have any questions, please contact me at (210) 522-6941 or gbessee@swri.org.

Sincerely,



Gary B. Bessee, Manager
Fluids Filtration & Handling Research

Approved by:



Steven D. Marty, P.E., Director
Fuels & Lubricants Technology Department

GBB/rae
r:\working\13507.18\ltr rpt_13aug2008 soot.doc
cc (via e-mail): S. Marty (SwRI)

This report must be reproduced in full, unless SwRI approves a summary or abridgement.