




RevNo	Revision note	Date	Signature	Checked
F	Updated to Jan 2012 Specification for a CONCRETE PAD	15/01/2012	MP	CT

KEY + Tolerances

- A = Turntable Diameter.
- B = Typical Clearance around turntable.
- D = Depth of Pad below ground level. (-0/+5mm)
- E = Main Pit Depth, with landscaping (-0/+5mm)
- G = Motor housing length outside turntable footprint
- H = Motor housing width
- J = Motor housing length INSIDE turntable footprint.

Services.
Route electric / water

Route Electric / Water

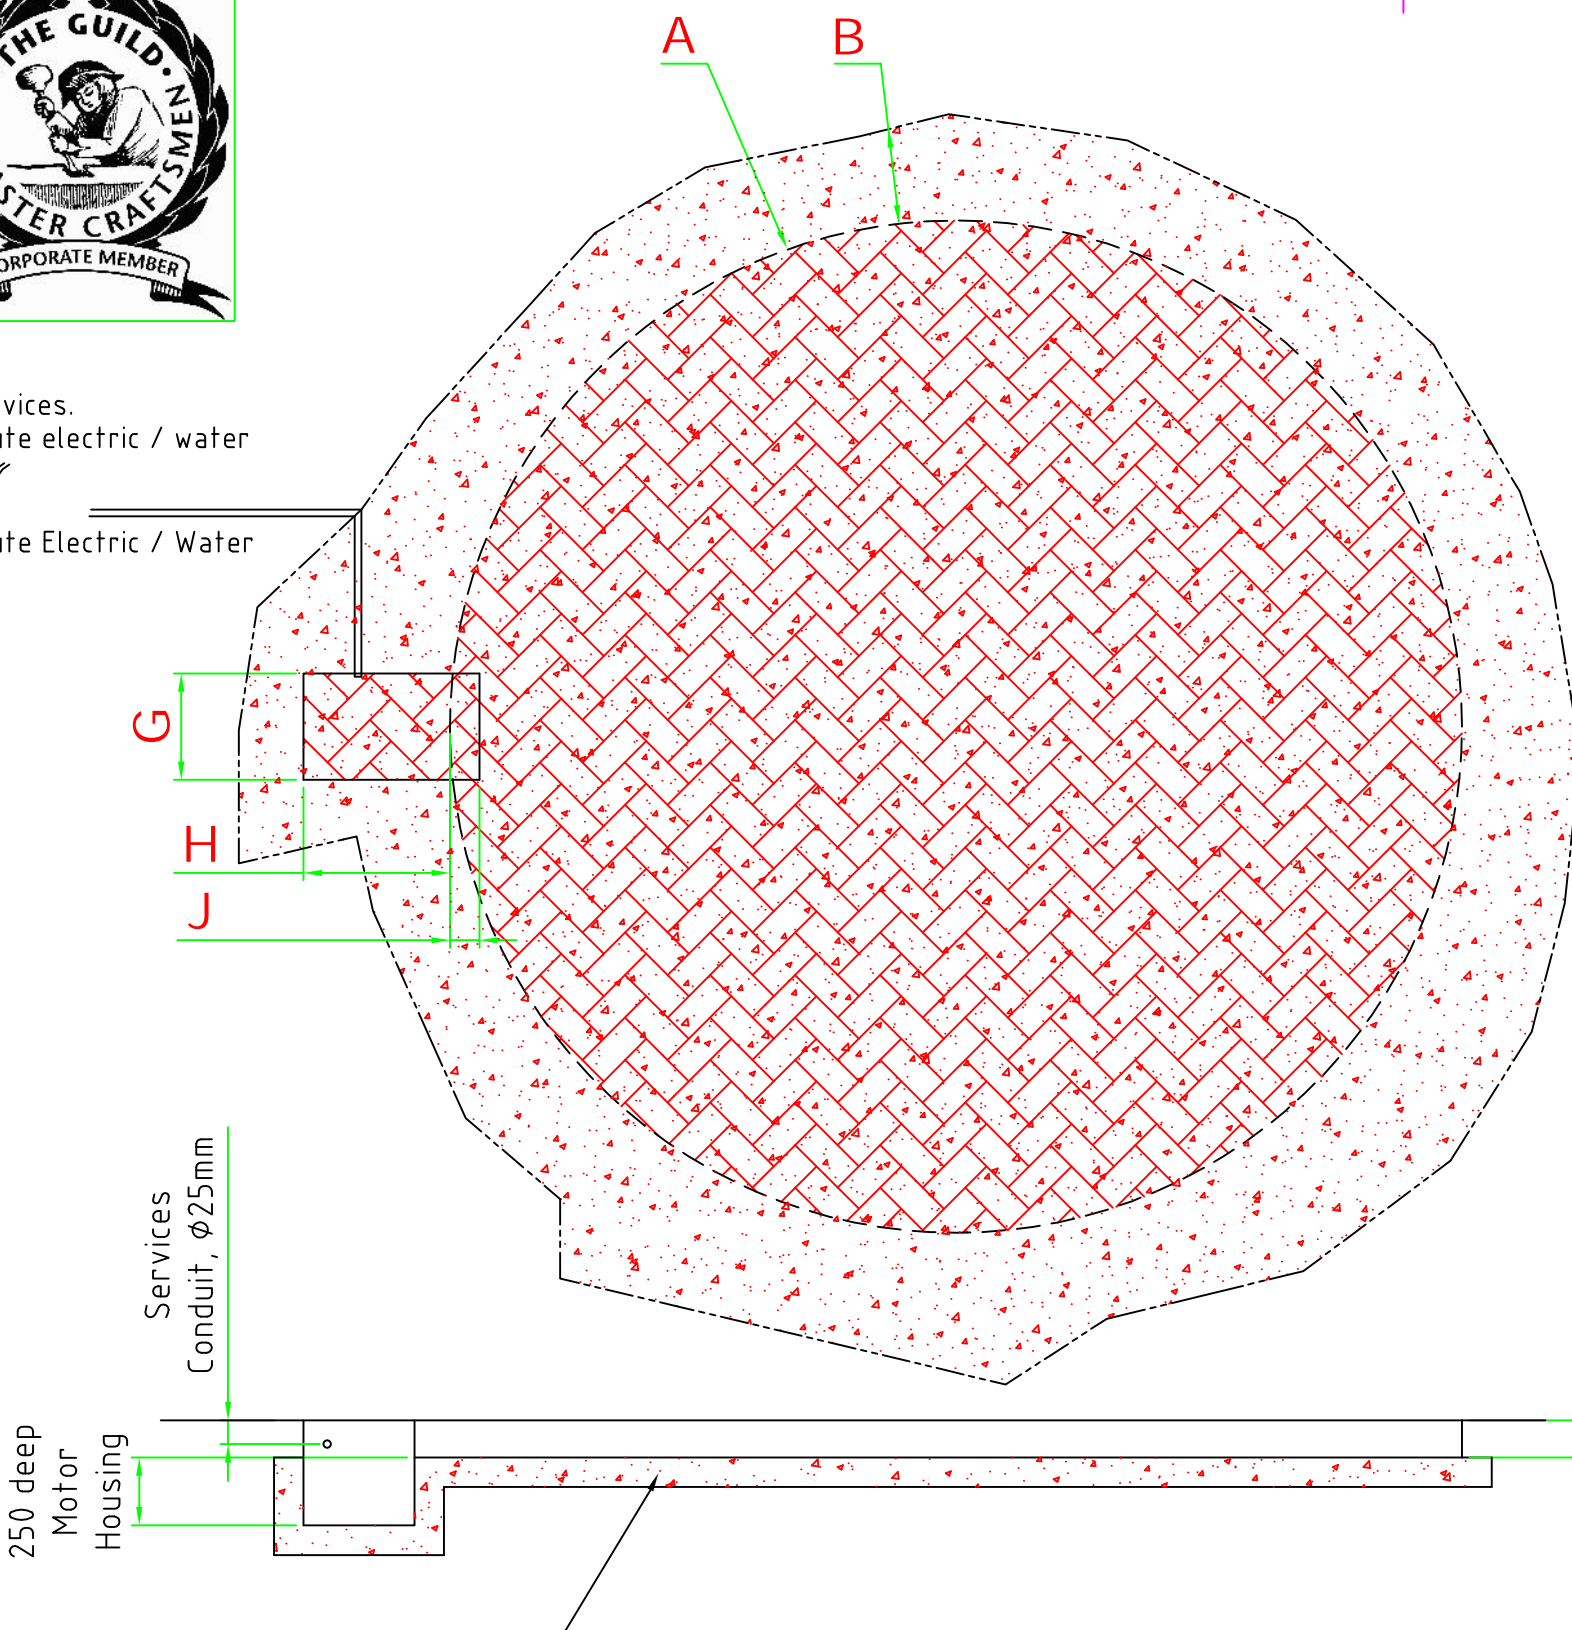

D = 140mm for a Standard Aluminum Finish)
E = 140mm + Thickness of Landscaping material for 'Block Paved'



Example of Motor Housing and center bearing set in to a concrete base.

A	B		D	E		G	H	J
3800	300		140	various		470	470	150
4100	300		140	various		470	470	150
5000	300		140	various		470	470	150
6000	300		140	various		470	470	150

100mm thick concrete base (typical)
float finish flat and smooth. Can be on a slope.

Concrete Pad



Itemref	Quantity	Title/Name, designation, material, dimension etc	Article No./Reference
Designed by M.PARKIN	Checked by C.TAYLOR	Approved by - K_OCONNOR	Filename GRNDWRK
SPIN-IT_LTD		TURNTABLE_GROUNDWORK	
		GRNDWRK_GENREIC_F_CONCRETE	Edition F
			Sheet 1/1