


Night Owl



Type		Illuminated	Non-illuminated
Dimensions (mm)	Height	1037	1037
	Width / Depth	395 / 110	395 / 110
	Sign face	300 dia	300 dia
	Base	320 x 320	320 x 320
Material		One piece reflex/rigid polymer composite	Reflex base, rigid polymer bollard
Passively safe	PM Permanent	BS EN 12767:2007 100 NE4.	BS EN 12767:2007 100 NE4.
Conspicuity	Type	Fluorescent translucent retroreflective to BS 5740	Fluorescent retroreflective to BS 5740
	Area front	0.16m ²	0.16m ²
	Area side	0.045m ²	0.045m ²
Lighting	Source	Cree LED powered by Zeta 240V - 6.65 Watts Circuit power factor 6.4	
	Photocell	55 Lux, Switching ratio:0.5 Typical burn hours 4115	
UMSUG	Charge code	40 0007 0006 100	
Fixing		Attach to in-ground Duct Box Retrofit to other base boxes with adapter plates	Concrete-in Surface mount

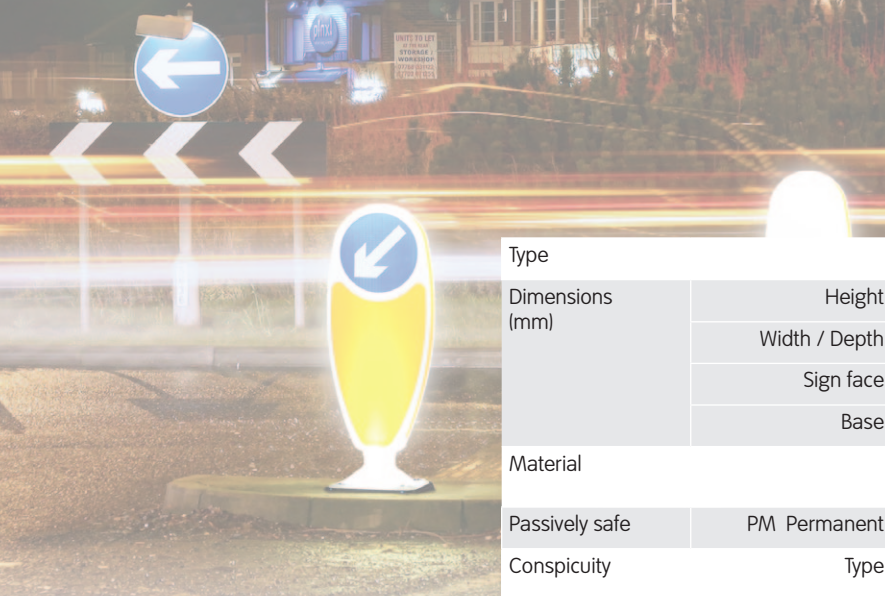

Night Owl™

All plastic, recyclable, passively safe, self-righting 'Keep Left' bollards that minimise the consequences of collisions for the driver and reduce the cost of repair and maintenance for the authority.

Available in both illuminated and non-illuminated formats, Night Owl has passed BS EN 12767:2007 & BS 8442:2006, 'Retro Reflective Self Righting Bollards' which require products to remain intact, returning to an upright position after a high speed impact, without reducing the speed of the vehicle by more than 3km/h.

Night Owl has particular application as a Keep Left bollard providing a durable, low maintenance, energy efficient, reduced carbon footprint solution for traffic islands in general.

See the Night Owl brochures for detailed information.

Night Owl is a Trademark of Leaffield Environmental Ltd