



# Eaton 5PX UPS

Enterprise class battery backup with extended runtime designed for virtualized environments.

## 5PX features and benefits:

**Extended Runtime:** Add up to four extended battery modules for maximum runtime.

**Virtualization-ready:** Available in convenient bundles with a network card and management software to make going virtual simple.

**Efficiency:** Provides industry leading efficiency of up to 99 percent.

### Manageability:

- **Energy metering:** The 5PX meters energy consumption right down to the outlet segments. No other UPS in the industry offers this capability.
- **UPS management:** By integrating Eaton's free Intelligent Power® Software Suite, you can monitor and manage the power devices on your network.

**LCD display:** Eaton's next generation LCD offers a graphical interface which provides all critical UPS information in a single screen view.

**More power:** Protects more devices by providing 28 percent more wattage compared to traditional UPSs.

**Battery life:** Eaton's exclusive ABM® technology increases battery service life by 50 percent.

## Intelligent Power Software Suite

By integrating the suite with the Eaton 5PX, you gain:

- Seamlessly integrate with VMware's vCenter Server™ virtualization management solution, as well as virtualization platforms such as Citrix® XenServer, Microsoft SCVMM™, Red Hat® and other Xen® open source platforms
- Initiate live migration of virtual machines (VM) to automatically and transparently migrate VMs during power disruptions to unaffected devices with systems such as VMware vMotion™ and Microsoft Live Migration
- Integrates with VMware vCenter Site Recovery Manager

To learn more, please visit:


[Eaton.com/intelligentpower](http://Eaton.com/intelligentpower)

## Services and support

Eaton provides product support 24 hours a day, 7 days a week. From battery replacement to full UPS service plans, Eaton has one of the top service models in the industry.

## Three-year warranty

The 5PX warranty covers both the UPS and the batteries for three years. No other manufacturer in the industry offers as comprehensive a warranty.

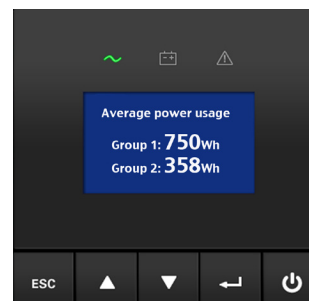

Power consumption monitoring down to the outlet segment on the graphical LCD screen

## 5PX MODEL SELECTION GUIDE\*

Catalog Number	Rating (VA/Watts)	Input connection	Output receptacles	Dimensions (H x W x D), in	Net weight, lb
<b>120V, 50/60 Hz</b>					
5PX1000RT	1000/1000	5-15P	(8) 5-15R	3.4 x 17.4 x 20.6	62
5PX1500RT	1440/1440				65
5PX2200RT	1950/1920				65
5PX3000RT2U	3000/2700	L5-30P	(1) L5-30R (6) 5-20R	3.4 x 17.4 x 25.4	87
5PX3000RT3U					86
<b>208V or 230V, 50/60 Hz</b>					
5PX1500iRT	1500/1350	C14-10A	(8) C13-10A	3.4 x 17.4 x 20.6	61
5PX2200iRT	2200/1980	C20-16A	(1) C19-16A		3.4 x 17.4 x 25.4
5PX3000iRT2U	3000/2700		(8) C13-10A	84	
<b>120V, 50/60 Hz Virtualization-ready bundles with Network Card-MS</b>					
5PX1500RTN	1440 / 1440	5-15P	(8) 5-15R	3.4 x 17.4 x 20.6	65
5PX2200RTN	1950 / 1920	5-20P	(8) 5-20R	3.4 x 17.4 x 20.6	65
5PX3000RTN	3000 / 2700	L5-30P	(6) 5-20R, (1) L5-30R	3.4 x 17.4 x 25.4	87
<b>208/230V, 50/60 Hz Virtualization-ready bundles with Network Card-MS</b>					
5PX3000iRTN	3000 / 2700	C20	(8) C13, (1) C19	3.4 x 17.4 x 25.4	84
<b>Extended Battery Modules</b>					
DC voltage	For use with	Max qty / UPS	Dimensions (H x W x D), in	Net weight, lb	
5PXEBM48RT	48V	All 1000, 1500 & 2200 models	4	3.4 x 17.4 x 20.6	72
5PXEBM72RT2U	72V	All 3000 2U models		3.4 x 17.4 x 25.4	102
5PXEBM72RT3U		All 3000 3U models		5.1 x 17.4 x 19.6	98

\*Due to continuous product improvement programs, all specifications are subject to change without notice. Please visit [Eaton.com/5PX](http://Eaton.com/5PX) to view complete and updated product specifications.


Additional Options	Catalog Number	For use with
<b>Connectivity</b>		
Network Card-MS	NETWORK-MS	All models*
Environmental Monitoring Probe	116750224-001	All models (requires Network Card-MS)
<b>Power Distribution &amp; Bypass</b>		
HotSwap Maintenance Bypass (MBP)	EHBPL1500R-PDU1U	All 1000 & 1500 models
The HotSwap Maintenance Bypass allows you to exchange or service the UPS without shutting down the connected load	EHBPL2000R-PDU1U	All 2200 models
	EHBPL3000R-PDU1U	All 3000 models
<b>Mounting Hardware</b>		
2-post rail kit	103007018-5591	All models

\* Network Card-MS is included with catalog numbers 5PX1500RTN, 5PX2200RTN, 5PX3000RTN and 5PX3000iRTN.

### What's in the box

- Tower pedestals
- Four-post rail kit
- User manual CD
- Intelligent Power Software Suite CD
- Quick start guide
- USB cable
- RS-232 serial cable
- Phillips Head screw driver
- 2 IEC to IEC jumper cables (208V/230V models)

## 5PX UPS rear panel (1000 & 1500 VA)

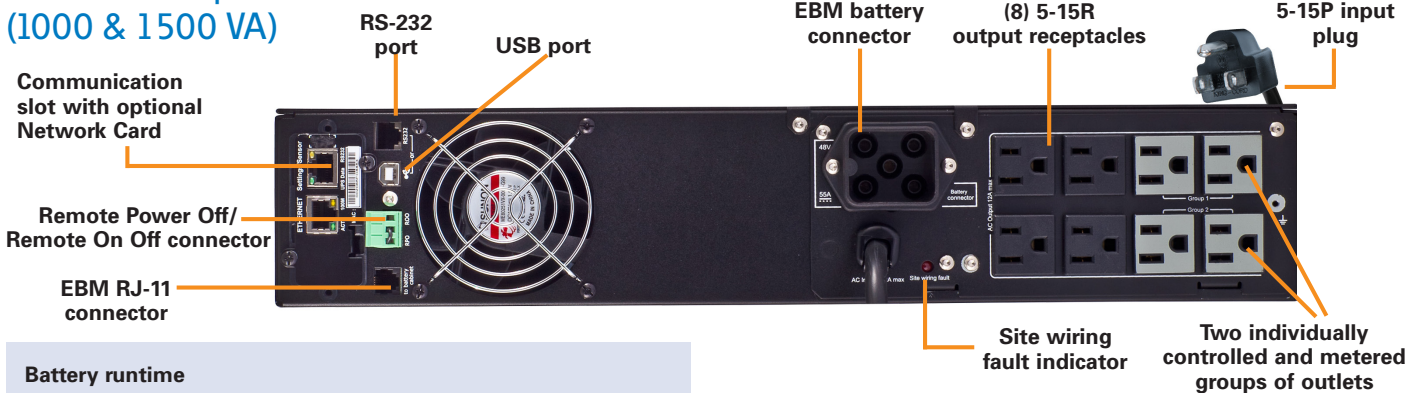

### Battery runtime

You can get up to five hours of battery runtime using the internal batteries and extended battery modules. For a detailed, interactive battery runtime chart, please visit: [Eaton.com/5PX](http://Eaton.com/5PX) - then view the individual technical pages for details of each UPS.

**Eaton Corporation**  
8609 Six Forks Road  
Raleigh, NC 27615  
United States  
800.356.5794

CANADA  
Ontario: 416.798.0112  
Toll free: 1.800.461.9166

[Eaton.com/powerquality](http://Eaton.com/powerquality)

©2011 Eaton Corporation  
All Rights Reserved  
Printed in USA  
5PX01FXA  
July 2012

To interact with the Eaton 5PX UPS, please visit:  
**Eaton.com/5PX**



Eaton is a registered trademark of Eaton Corporation.

All other trademarks are property of their respective owners.