

Single-phase
UPS

NETYS PE

from 400 to 1 000 VA

top of the range electrical protection

A PERSONAL configuration

- Adapted to protect office applications.
- A range of four nominal voltages.

A solution to network power cuts and voltage variations

- Thanks to the integrated AVR function (Automatic Voltage Regulation).

Adapted connection

- Computer usage on IEC320 sockets (IT standard).

Protection for your phone line

- Protection for the phone line / modem / ADSL (RJ11 connector) on the 600 to 1 000 VA models.

Easy to use

- Control panel with LEDs allowing the operating mode to be easily monitored.

Communication with the computer system

- RS232 and USB advanced connections for management of the power supply and of the controlled automatic shutdown of applications via PC (**NETYS PE** 600 to 1 000 VA models).

INTERACTIVE LINE
WITH AVR

2 YEAR GUARANTEE



NETYS PE
400 / 600 / 800 VA



NETYS 002 B 1 CAT


NETYS PE
1 000 VA




NETYS 004 B 1 CAT

Your protection
for


- > CAD, graphic workstations
- > Multimedia workstations and peripherals
- > LCD or CRT monitors

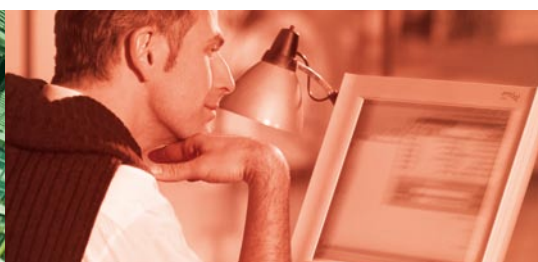

Connections

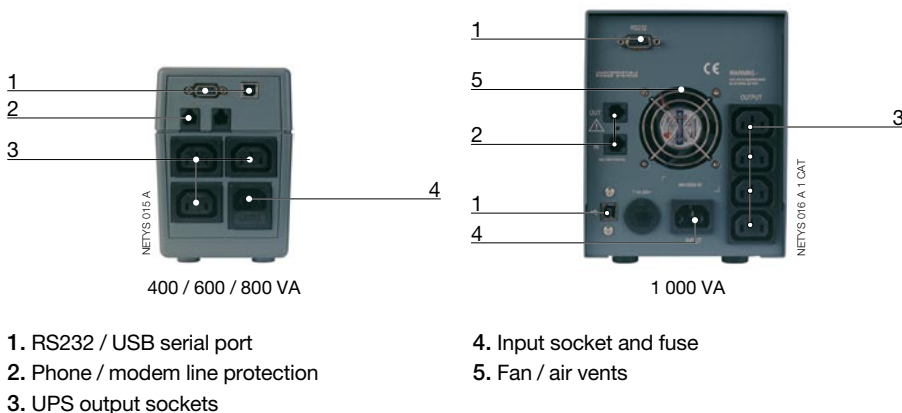

Control panel

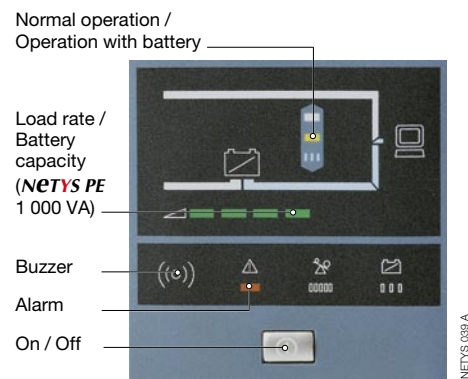

Technical data



MODELS ITEM CODE	NETYS PE 400 NET0400-PE	NETYS PE 600 NET0600-PE	NETYS PE 800 NET0800-PE	NETYS PE 1 000 NET1000-PE
UPS power	400 VA (240 W)	600 VA (360 W)	800 VA (480 W)	1 000 VA (600 W)
Input	230 V (170 ÷ 280 V) ; 50 / 60 Hz with automatic selection			
Output	230 V nominal ; 50 / 60 Hz			
Output sockets	3 IEC 320		4 IEC 320	
Telephone protection	- telephone line / modem / ADSL input / output: RJ11			
BATTERIES				
Type	sealed lead - acid maintenance free - expected life 3 / 5 years			
Back-up time ⁽¹⁾	8 min.	15 min.	20 min.	45 min.
COMMUNICATION				
Interface	- RS232 and USB serial port (free software via Internet)			
ENVIRONMENT				
Dimensions W x D x H (mm)	99 x 334 x 143		140 x 370 x 180	
Weight	5.0 kg	6.1 kg	6.6 kg	13.6 kg
Reference standards	(EN) IEC 62040-1-1 (safety), EN 50091-2 / IEC 62040-2 (EMC), EN 61000-4-5 / C62.41: 1991 (over voltage)			

(1) PC + LCD monitor 15".

Communication option

- **UNI VISION** software for the control and automatic shutdown of applications connected to Windows™ and Linux. Free to download from our website: www.socomec.com.

HEAD OFFICE

SOCOMECC GROUP

S.A. SOCOMEC capital 11 102 300 € - R.C.S. Strasbourg B 548 500 149
B.P. 60010 - 1, rue de Westhouse - F-67235 Benfeld Cedex

SOCOMECC UPS Strasbourg

11, route de Strasbourg - B.P. 10050 - F-67235 Huttenheim Cedex- FRANCE
Tel. +33 (0)3 88 57 45 45 - Fax +33 (0)3 88 74 07 90
ups.benfeld.admin@socomec.com

SOCOMECC UPS Isola Vicentina

Via Sila, 1/3 - 1 - 36033 Isola Vicentina (VI) - ITALY
Tel. +39 0444 598611 - Fax +39 0444 598622
info.it.ups@socomec.com

www.socomec.com

UK SALES AND SERVICE

SOCOMECC UPS UK

Units 7-9 Lakeside Business Park, Broadway Lane, South Cerney
Cirencester, Gloucestershire GL7 5XL - ENGLAND
Tel. +44 (0)1285 863300 - Fax +44 (0)1285 862304
uk.ups.sales@socomec.com

ADEPT POWER SOLUTIONS LTD - UK DISTRIBUTOR

Unit 1 Viscount Court, South Way, Walworth Industrial Estate, Andover
Hampshire, SP10 5NW - ENGLAND
Tel. +44 (0)1264 35 14 15 - Fax +44 (0)1264 35 12 17
sales@adeptpower.co.uk

Non contractual document. © 2008, Socomec SA. All rights reserved.

