




Acam Instrumentation Ltd

Mounts Business Park, 23 Thomas Street
Northampton NN1 3EN

Tel/Fax 10604 628700 Email: tom@acamltd.co.uk

This Acam flush miniature pressure transducer offers a range of pressure from 10 to 400 bar. Employing ceramic technology it is very stable. The standard is an amplified device giving 1 volt range but other values of range, and indeed, zero pressure output are available to special order. Very high temperature units are available without amplification, although our normal standard is stainless steel, other transducer materials may be used. For example Titanium or Inconel.

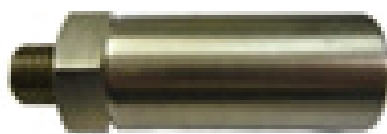

Typical Pressure Transducer

In addition the measured fluid sees a viton seal. Temperature ranges up to 125 deg C are available. Transducers and sensors can be designed to customers specific requirements. In this case we will need to know the full details of the application, including fluids at the diaphragm, environmental conditions, the media surrounding the transducer, temprature range and if high levels of shock may be present. Acam have had a commitment to quality, customer service and technological advancement for over 40 years!

Specification	
Pressure Range	1 to 350 Bar
Over pressure	1.5 Pressure Range
Media	Compatible with SS, Viton & Ceramic
Excitation	7 to 30 Volts
Current Typical	2 mA
Full Scale Output	1 Volt and to Order
Zero Pressure Output	500 mV +/- 100 mV
Static Error Band	<0.4% FSO
Repeatability	<0.1% FSO
Insulation Resistance	<100 Mohms @ 50 VDC
Compensated Temperature Range	0 to 120 deg C
Operating temperature Range	-55 to 125 deg C
Thermal Zero Shift	<1% / 50 deg C
Thermal Span Shift	<1% / 50 deg C
Electrical Interference	Screened Cable - Connector Special Order
Mechanical Interference	Flush Diaphragm 3/8 UNF

Pressure Transducer