







The Endoline 200 Series has become one of the most successful case erector designs in over 30 years of production. Key to the success of the type 227 (self-adhesive tape) and type 228 (hot melt glue) case erectors is the ability to run at speeds of up to 22 cases per minute. There are a number of unique features that combine to make the 227/228 Case Erector extremely efficient, reliable and versatile while handling a wide variety of case sizes and styles.

### Features of the 227/228 include:

#### **Dual Opposing Vacuum Case Opening**



This unique design feature ensures that each case is opened positively from both sides. It ensures the efficient and reliable opening of cases, and overcomes problems that can be associated with stiff board and glue migration from the manufacturer's joint.

#### **Robust Construction**



High quality components, housed in a robust, computer designed chassis allow for minimal servicing. Designed for the rigours of typical end-ofline packaging environments.

#### Low Cost of Ownership



The Endoline 220 Series of Case Erectors is designed to give you the best possible value for your investment through maximum productivity with minimal stoppage time for problem-solving or case size changes.

#### Easy to Use



The 220 series is designed with clear access, simple controls and quick to adjust to size changes. The machines are operator friendly and allow for quick and easy size change, cleaning and maintenance to ensure minimal machine down time.


# www.endoline.co.uk



**227 & 228** Fully Automatic Case Erectors

### **OPTIONS INCLUDE:**

- Low tape and no tape sensing
- Visual/audible failure alarm
- Low glue sensing (228)

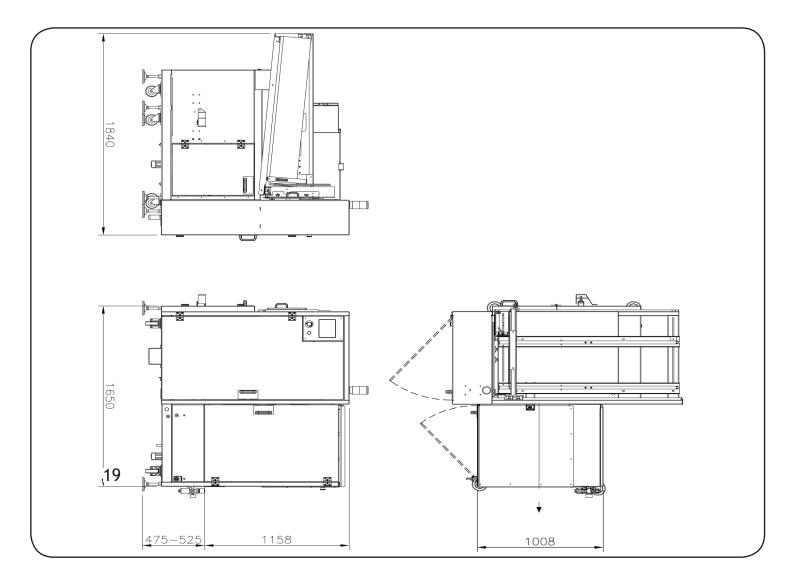



Endoline Machinery Limited Stratton Business Park, London Road Biggleswade, Bedfordshire SG18 8QB United Kingdom

Telephone: +44 (0) 1767 316422 Facsimile: +44 (0) 1767 318033 E-mail: sales@endoline.co.uk Website: www.endoline.co.uk

#### Case Dimensions (mm).

	Length	Width	Height (open)
227/228 Minimum	160	100	150
Maximum	400	300	400

Speed Up to 22 cases per minute

Electrical Supply 400V 3Ø 50Hz E+N 3A/Phase

Tape Size (Type 247) Standard: up to 50mm wide Pneumatics

5.5 bar 610l/min free air at 22 cases per min (12mm connection)

Machine Finish Mild steel, powder coated white (RAL 9010) or stainless steel

 $\ensuremath{\mathbb C}$  Endoline reserves the right to change specifications without prior notice.

## www.endoline.co.uk