

# SENCO®

Performance. Power.  
Productivity.™

# SN951XP


## 4" 34° Framing Nailer

Exceptionally well balanced framing nailer was designed to power nails into the toughest engineered lumbers. The SN951XP will consistently drive up to a 4" x .131" making it both versatile and exceptionally powerful. Whether you are driving ring, screw or smooth-shank clipped head nails this tool has the power and fastener range to dominate the toughest jobs. SENCOS XP tools are specifically engineered for demanding professionals working in the roughest environments. Built with enhanced features and superior components - SENCOS XP tools can be counted on and are backed by a 5-year limited warranty.



### Specifications

Item#	5B0001N
Selectable actuation trigger	
Reg. Operating Pressure	70-120 psi (4.8 - 8.3 bar)
Air Consumption (60 cycles per min.)	7.9 scfm
Air Inlet	3/8" NPT
Tool Weight	8.5 lbs (3.86 kg)
Height	13.8" (351 mm)
Length	17.3" (440 mm)
Width	4.76" (121 mm)
Fastener Capacity	83

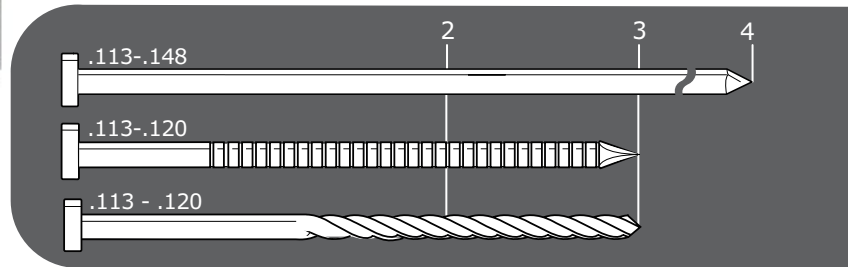

### Fastener Specifications

Shank Diameter	.113" - .138"
Fastener Range	2" - 4"
Finish	Bright Basic, Galv. & Stainless
Collation	34° angled strip

### Applications

Engineered lumber, framing, sheathing, truss building, sub-floor, decking and industrial applications. Other applications include crate and box assembly, pallet making, furniture frame assembly and fencing.

### Features and Benefits

- 20% more powerful than standard framing nailers - yet weighs only 8.5lbs.
- Tool free depth of drive
- Well balanced, ergonomic design
- Uses less air to drive nails- Highly efficient internal design
- Dry Fire Lockout
- Reduced jams and mis-feeds - Patented TrueDrive magazine
- Low profile design fits easily between studs and joists
- Retractable Rafter Hanger
- Contact or sequential trigger actuation - Patented drive selector
- 5-year limited warranty

\*Choose the right actuation mode!

Sequential Actuation (also known as restrictive trigger or trigger fire) operates in the following a sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

Always read the Operators Manual and Safety Instructions with all tools to ensure proper use and safety precautions. For additional information on trigger systems and how SENCOS will save you time, reduce costs, and increase quality, call our toll-free Action Line: 800-543-4596, or visit our web site at: [www.senco.com](http://www.senco.com).



Performance. Power.  
Productivity.™

# SN951XP

## Features

**5-Year Limited Warranty**  
XP Durability

**Ergonomic design**  
Superb balance for all day use

**Full Comfort Overmold Grip**  
Resilient grip reduces fatigue



**Rafter Hanger**  
Retractable

**Low Profile Design**  
Easily fits between studs & joists

**Aluminum Housing**  
Lightweight, superior durability

**Uses Less Air**  
Highly efficient internal design, runs great with 1/4" line fittings

**Thumbwheel Adjustable Depth-of-Drive**  
Drives nails to a consistent and controllable depth

**Aggressive Toenail Safety**  
for improved toe-nailing



**Rear Two-Step Loading**  
Quick and easy for right or left handers

**Patented TrueDrive™ Magazine**  
Reduced jams and mis-feeds

**Selectable Trigger**  
Contact or Sequential Trigger Actuation Switch – Patented drive selector\*

**Nail Lockout**  
Prevents dry fire

### SENCO® 34° Smooth Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets

Length	Item Code	Box Count	Finish
2 x .113	GC21APBK	2.5M	Bright
2 1/4 x .113	GC23APBX	2.5M	Bright
2 3/8 x .113	GC24APBX	2.5M	Bright
2 1/2 x .113	GC25APBX	2.5M	Bright
3 x .120	HC27APBX	2.5M	Bright
3 1/4 x .120	HC28APBX	2.5M	Bright
3 x .131	KC27APBX	2.5M	Bright
3 1/4 x .131	KC28APBX	2.5M	Bright
4 x .131	KC31APBK	2.5M	Bright
2 1/2 x .113	GC25AABK	2.5M	Galv
3 x .120	HC27AABX	2.5M	Galv
3 x .131	KC27AABX	2.5M	Galv
2 3/8 x .113	GC24ASBK	2.5M	Hot Dip
3 x .120	HC27ASBX	2.5M	Hot Dip
3 x .131	KC27ASBX	2.5M	Hot Dip
3 1/4 x .131	KC28ASBX	2.5M	Hot Dip
3 1/2 x .131	KC29ASBX	2.5M	Hot Dip
3 x .131	KC27AGBK	1.M	Stainless

### SENCO® 34° Screw Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets

Length	Item Code	Box Count	Finish
3 x .120	HF27EPAK	3.1M	Bright
3 x .120	HF27EDB	1.M	Exterior
3 x .120	HF27AGBK	1.M	Stainless

### SENCO® 34° Ring Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets

Length	Item Code	Box Count	Finish
2 x .113	GE21APAX	2.5M	Bright
2 3/8 x .113	GE24APBX	2.5M	Bright
2 x .113	GE21AAAX	2.M	Galv
2 3/8 x .113	GE24AABX	2.5M	Galv
3 x .120	HE27AABX	2.5M	Galv
2 3/8 x .113	GE24AAAX	2.5M	Galv
3 1/4 x .120	KC28AABX	2.5M	Galv
2 x .113	GE21ASBK	2.5M	Hot Dip
2 3/8 x .113	GE24ASBX	2.5M	Hot Dip
3 x .120	HE27ASBX	2.5M	Hot Dip
2 3/8 x .113	GE24AGBK	1.M	Stainless
3 x .120	HE27AGBK	1.M	Stainless

### SENCO® RoundStrip™ 34° Smooth Round Head Nails

This design allows round head nails to be collated in a "nested" shank-to-shank 34° paper tape strip

Length	Item Code	Box Count	Finish
2 3/8 x .113	G524APBX	2.5M	Bright
3 x .120	H527APBX	2.5M	Bright
3 x .131	K527APBX	2.5M	Bright
3 1/4 x .131	K528APBX	2.5M	Bright
3 1/2 x .131	K529APBX	2.5M	Bright
2 x .113	G521ASBK	2.M	Hot Dip
2 3/8 x .113	G524ASBX	2.5M	Hot Dip
3 x .120	H527ASBX	2.5M	Hot Dip
3 x .131	K527ASBX	2.5M	Hot Dip
3 1/4 x .131	K528ASBX	2.5M	Hot Dip

### SENCO® RoundStrip™ 34° Ring Round Head Nails

2 3/8 x .113	G624APBX	2.5M	Bright
3 x .120	H627APBX	2.5M	Bright
2 x .113	G621ASBX	2.5M	Hot Dip
2 3/8 x .113	G624ASBX	2.5M	Hot Dip
3 x .120	H627ASBX	2.5M	Hot Dip
3 x .131	K627ASBX	2.5M	Hot Dip