



Performance. Power.
Productivity.™

RoofPro® 455XP

XtremePro™ 1 3/4" Full Round Head Coil Roofing Nailer

Step up to the tough and dependable RoofPro 455XP Coil Nailer. It's loaded with the features you asked for, yet is light enough for one-handed operations for both new roofs and reroofing. Also for attaching waterproof tar paper, metal drip edges, insulation board and with an optional attachment for vinyl and aluminum siding. Simply the best roofing nailer money can buy.



Applications


For asphalt and fiberglass shingle nailing, for both new roofs and reroofing. Also for attaching waterproof tar paper, metal drip edges, insulation board, and, with a special optional attachment, vinyl and aluminum siding.

Features and Benefits

- Aluminum main housing and cap – more durable than magnesium for punishing roofing environments
- Weighs just 5.4 lbs. for easy one-handed operation
- Tool-free adjustable depth of drive for consistent and controllable nail set
- Comfort and convenience features include: durable molded comfort grip, 360 tool-free adjustable exhaust, and adjustable shingle guide
- Steel wearplates reduce shingle abrasion on tool
- Adjustable nail canister accommodates entire range of true round-head roofing nails
- Tool includes case, tool oil and wrench

Tool Specifications

Item#3D0101N
 Sequential actuation trigger
 Reg. Operating Pressure.... 70-120 psi (4.8 - 8.3 bar)
 Air Consumption (60 cycles per min.) 6.54 scfm
 Air Inlet 1/4" NPT
 Weight..... 5.4 lbs (2.5 kg)
 Height 10.5" (260 mm)
 Length 10.25" (260 mm)
 Width 4.5" (114 mm)
 Fastener Capacity 120

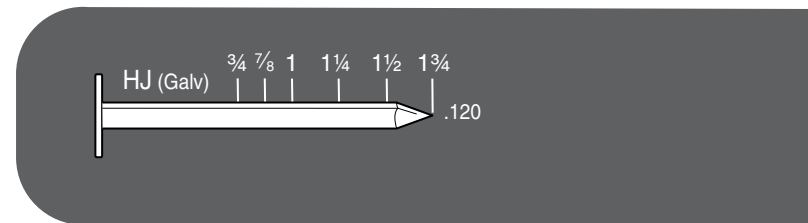

Fastener Specifications

Gauge 11
 Shank Diameter120"
 Fastener Range 3/4" – 1 3/4"
 Finish WeathereX 2 & Galvanized
 Collation..... Angular, flat wire wound coil

SENCO 11 Ga. Roofing Coil Nails

Length	Carton		Finish
	Item Code	Count	
3/4 x .120	M003101	7.2M	Galv
7/8 x .120	M003102	7.2M	Galv
1 x .120	M003103	7.2M	Galv
1 1/4 x .120	M003104	7.2M	Galv
1 1/2 x .120	M003105	7.2M	Galv
1 3/4 x .120	M003106	7.2M	Galv

SENCO®

Performance. Power.
Productivity.™

RoofPro® 455XP

XtremePro™ 1 3/4" Full Round Head Coil Roofing Nailer Features



Choose the right trigger system for your specific needs!
Sequential Actuation Trigger (also known as restrictive trigger or trigger fire) operates in the following sequence - depress the safety element at the nose of tool against the work surface then pull the trigger. After each fastener is driven, release the trigger and lift the tool off the work surface before starting the sequence again. This trigger is recommended and acceptable for most applications.

Contact Actuation Trigger (also known as dual action, bounce or bottom fire) operates in the following sequence- pull the trigger first and keep the trigger pulled while moving the tool along the work surface with a bouncing motion, depressing the safety element at the nose of the tool against the work surface where the fastener is to be driven. This trigger is recommended for use by trained professionals only in high production or volume applications.

For additional information on how Senco Power Fastening Systems will save you time, reduce costs, and increase quality, call our toll-free Action Line: 1-800-543-4596 to find your nearest Authorized Senco Dealer or Distributor. Visit our web site at: www.senco.com



Tool includes case, tool oil and wrench.

RoofPro 455XP Accessories	Item #
Vinyl/Aluminum Siding attachment	21192900066
Parts Kit	YK0424, YK0425
Compressor	
1.5hp, 2.5 gal. 110v, hand carry	PC0968
2.5hp, 4.3 gal. 110v, hand carry	PC1131