

# 'Gripfast' Rubber Coated Holding Magnets


Ideal for all types of holding applications onto painted surfaces.  
Such as; vehicle signs, notice boards, whiteboards, coat hooks & picture frames.



Maximum Temperature 80°C.

Structure: Strong rubber coated magnets mounted onto a coated steel plate with either fixing holes, male studding, self-adhesive backing or left plain to glue into position.

PART NUMBER	DIMENSIONS mm			Fixing Method	Sheer Holding Force
	L	W	H		
NIAS01096	90	30	7.5	x2 Dia5 holes	6kgs
SFAS01429	80	55	13.5	M6x16mm stud	9kgs
SFAS01613	80	55	13.5	S/Adh tape or glue	9kgs
NIAS01426	65	45	7	N/A	6kgs

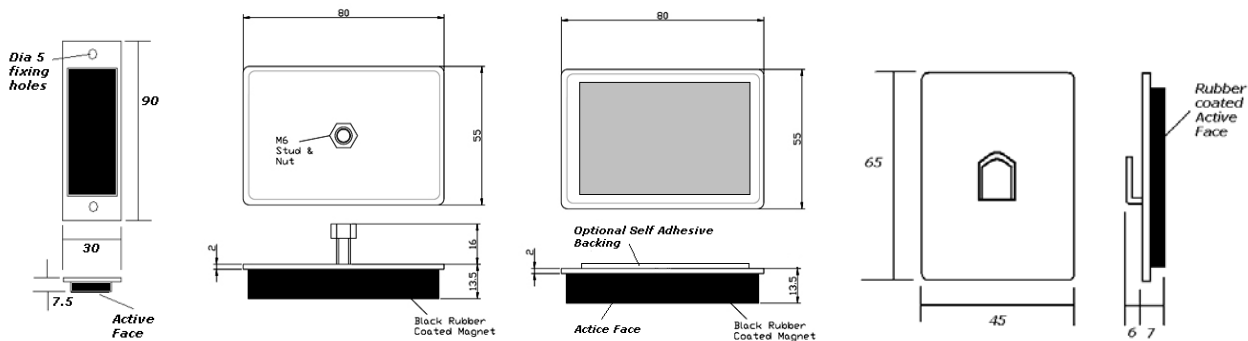

**magnetsales**

and service limited

Magnet Sales & Service Limited  
Unit 31 Blackworth Industrial  
Estate,  
Highworth, Wilts SN6 7NA UK

Tel: 01793 862100  
Fax: 017993 862101

E-mail [sales@magnetsales.co.uk](mailto:sales@magnetsales.co.uk)  
[www.magnetsales.co.uk](http://www.magnetsales.co.uk)



Certificate No 2346