


High Temperature Deep Pot Magnet

Ideal for high powered direct holding application in harsh environments, e.g. tooling application.

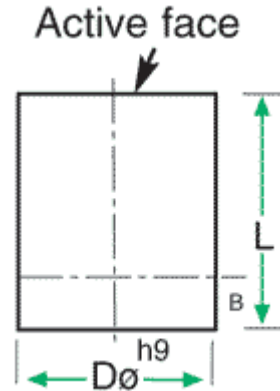

Structure:

Brass pot with inserted sandwich system.

Maximum Temperature +200°C.

(Non-active face can be drilled & tapped to a maximum depth as shown in dimension B.)

PART NUMBER	DØ	H	B	Kg PULL
SMDP 00100	6	20	10	0.6kgs
SMDP 00101	8	20	10	1.0kgs
SMDP 00102	10	20	8	4.0kgs
SMDP 00103	13	20	6	6.0kgs
SMDP 00104	16	20	2	12.5kgs
SMDP 00163	20	25	5	25kgs
SMDP 00105	25	35	7	40kgs
SMDP 00164	32	40	5	60kgs

magnetsales

and service limited

Magnet Sales & Service Limited
Unit 31 Blackworth Industrial
Estate,
Highworth, Wilts SN6 7NA UK

Tel: 01793 862100
Fax: 017993 862101

E-mail sales@magnetsales.co.uk
www.magnetsales.co.uk



Certificate No 2346