


## OV Truss OV30 Ladder




The OV range represents an innovative engineering solution to a common size of truss for the entertainment, event and presentation industry.

Designed to the latest Eurocodes, combines high comparative load capacities, low self-weight, and comes at a competitive price. All this whilst analysing the most common slinging / support methods on the truss has determined an 'engineered' product that can utilise the most modern manufacturing techniques.

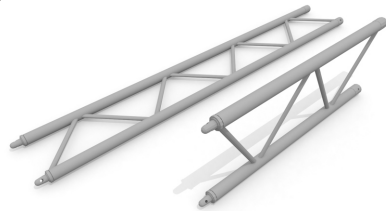

The OV range is a series of square and triangular truss systems using conical connectors for a quick fixing method. Brace patterns are specifically designed to withstand the loads and forces implied by all common slinging and support methods. The extrusions used in the construction of the trusses are bespoke to Total Solutions Group and have been rigorously designed to enhance the structural effectiveness of the trusses and also to speed up manufacturing.

Span (metres)	3	6	9	12
UDL kg	2460	673	349	217
CPL kg	1230	336	174	108
TPL kg	922	252	131	82
QPL kg	615	168	87	54



- All loads are given in Kilograms and Kilonewtons
- Allowance has been made for self-weight of truss
- Allowance has been made for frequent use factor of 83%
- The payload of the truss has been calculated as a permanent action. Should it be necessary to consider the payload as a variable action, the tabulated figures should be reduced to 90% of the given values
- All loads assume lateral support at 2mt intervals

## OV Truss OV30 Ladder



### Material Specifications

Main Chord:	48.3 x 2.6mm
Braces:	Special Extrusion
Material Specifications:	EN AW-6082 T6
Fixings:	Conical : TFC pins & R3 Clips

### Accessories

Circles
Hinges and Swivels
Bespoke Lengths
Ladder Sections

### Item Codes, Weights and Dimensions

OV30L-025	'OV' Truss, 30cm Ladder, 0.25Mt section	250mm x 48mm x 300mm	1.6kg
OV30L-050	'OV' Truss, 30cm Ladder, 0.5Mt section	500mm x 48mm x 300mm	2.0kg
OV30L-100	'OV' Truss, 30cm Ladder, 1.0Mt section	1000mm x 48mm x 300mm	3.1kg
OV30L-200	'OV' Truss, 30cm Ladder, 2.0Mt section	2000mm x 48mm x 300mm	5.4kg
OV30L-300	'OV' Truss, 30cm Ladder, 3.0Mt section	3000mm x 48mm x 300mm	7.8kg
OV30L-400	'OV' Truss, 30cm Ladder, 4.0Mt section	4000mm x 48mm x 300mm	10.2kg
OV30L-90	'OV' Truss, 30cm Ladder, 90deg Horz corner	400mm x 400mm x 300mm	2.6kg
OV30L-3W	'OV' Truss, 30cm Ladder, 3 Way Horz. corner	500mm x 400mm x 300mm	3.2kg
OV30L-4W	'OV' Truss, 30cm Ladder, 4 Way Horz. corner	500mm x 500mm x 300mm	3.8kg
OV30L-GPC	'OV' Truss, 30cm Ladder, Goal Post corner	400mm x 400mm x 300mm	2.5kg
OV30-FC100	'OV' Truss, Female bolt-on Connector - 100mm	100mm x 48mm x 48mm	0.4kg
OV30-MC100	'OV' Truss, Male bolt-on Connector - 100mm	100mm x 48mm x 48mm	0.6kg
OV30T-BP	'OV' Truss, 30cm Squ, Ali Base plate, 50cm Squ - No conns	500mm x 500mm x 8mm	5kg
OV30L-LTA-F	'OV' Truss, 30cm Ladder to Truss adapter, Female	100mm x 48mm x 300mm	1.516kg
OV30L-LTA-M	'OV' Truss, 30cm Ladder to Truss adapter, Male	100mm x 48mm x 300mm	1.67kg

### Design Specification

Manufactured in accordance with

BS EN 1090-3:2008 : Technical Requirements for aluminium structures

EN ISO 9001:2008 : Quality management systems

BS EN 1999 Pt 1-1 : Design of Aluminium Structures, General structural rules

CWA15902-2 : Specifications for design, manufacture and for use of aluminium and steel trusses and towers

CE Certified

