







UNIROOF E 40 mm

Leister's UNIROOF E 40 mm, the automatic roof welding machine of the new, powerful compact class, makes it convenient and easy to work with single-ply membranes. The new 40 mm nozzle means greater safety with overlap welding. Thanks to 2900 Watt power at only 13A, the tool can be used practically anywhere while providing ample power reserves.

Hot-air welder

UNIROOF E 40 mm

1		More power with 40 mm: The most powerful UNIROOF heating element ensures an even greater power reserve, even at cold temperatures or with thick materials.
2		Tool guidance: Adapted guide roller for even better and easier control when welding.
3		A powerhouse: The powerful drive can manage gradients up to 30° effortlessly. That means the UNIROOF E 40 mm can also be used on sloping roofs.
4		Everything handled perfectly: The freely adjustable guide bar ensures ideal, ergonomic handling of the UNIROOF E 40 mm.
5		More contact force: Having the centre of gravity directly above the contact roller creates even more pressure, thus allowing a constant weld quality for all types of membrane.

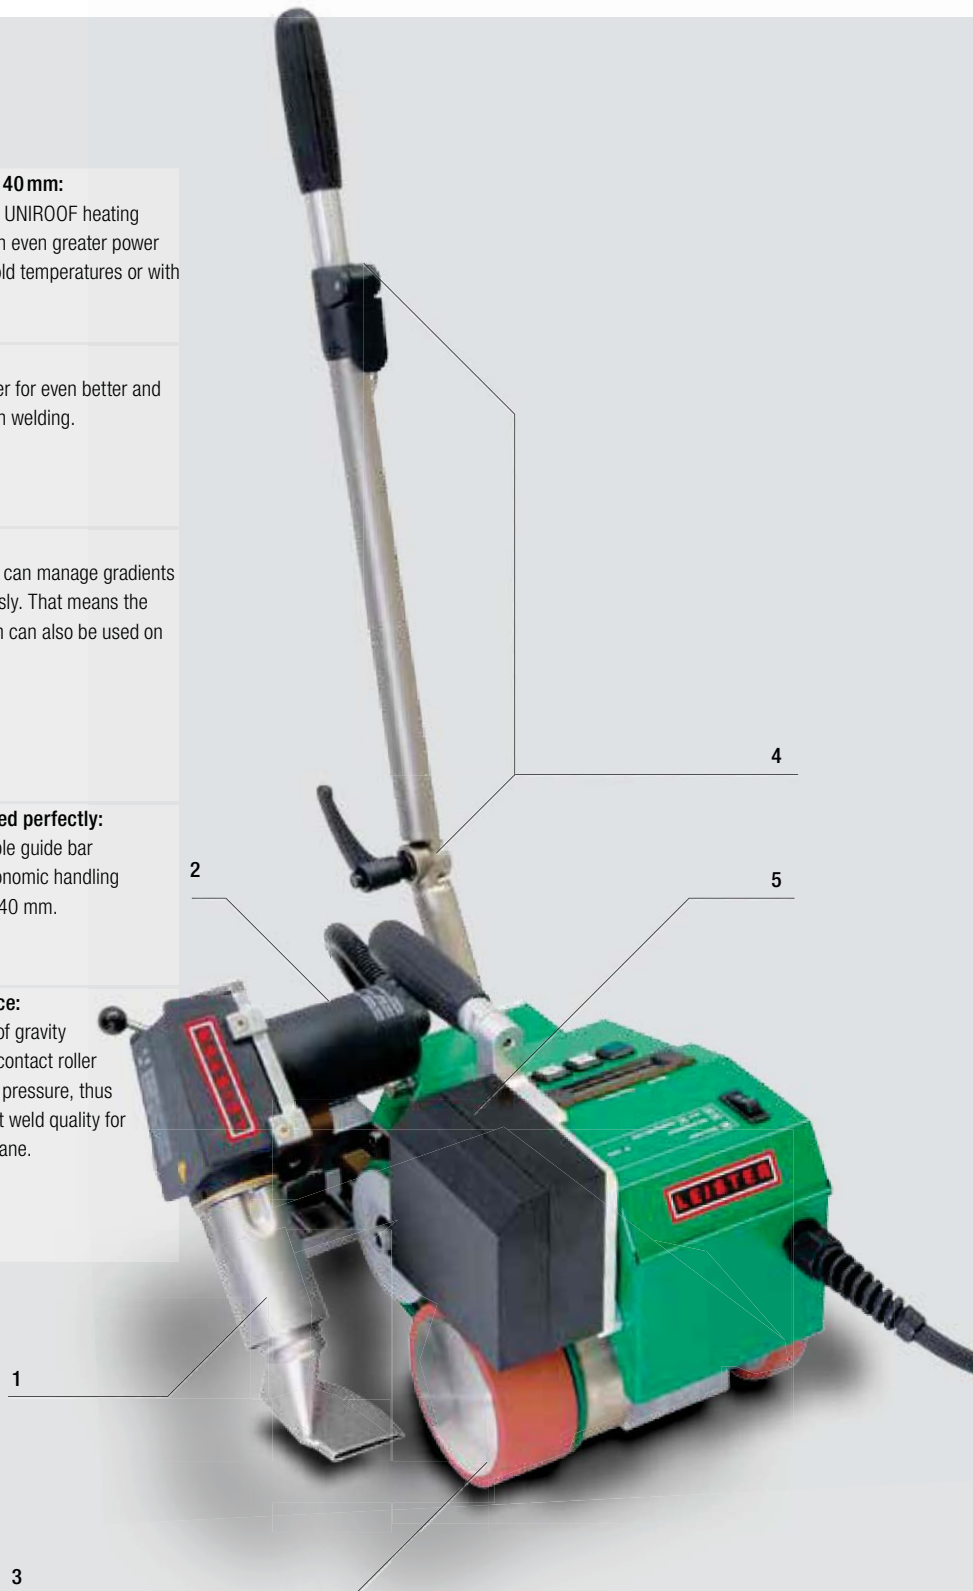



Hot-air welder

UNIROOF E 40 mm



- Controlled technology with display guarantees a constant and reliable weld for a leakproof roof
- 100% swiss made quality
- Powder-coated, rust-free stainless steel housing and rustproof components
- Lightweight and compact







Technical Data

Amperage	A	13
Voltage	V~	230
Power	W	2900
Frequency	Hz	50 / 60
Temperature	°C	80 – 600
Speed	m / min	1 – 5
Welding seam width	mm	40
Size (L x W x H)	mm	420 x 280 x 210
Weight		
(incl. cable and additional weights)	kg	15.4
Weldable materials	PVC, TPO, ECB, EPDM, CSPE	
Protection class I	⊕	
Approval marks	CE, CCA	

Article No.:

147.828 UNIROOF E 40 mm, 230 V with Euro-plug
 Included in scope of supply: Handle, with guide bar, 2 additional weights, storage case, operating instructions and DVD

Accessories UNIROOF E 40 mm

	148.731 40 mm grip-nozzle for TPO / FPO single plies
	107.067 Additional weight for even more pressure
	115.057 Lifting device for simple moving to the next weld seam
	126.448 Storage case (included with purchase)
	147.836 Guide-bar, complete, adjustable
	103.605 Heating element 230 V / 2750 W

The storage case included in the scope of supply keeps the UNIROOF E 40 mm safe at all times and makes it convenient to carry.

