



XF05



XF | RANGE

radial piston motors

ROTARY POWER has over 40 years experience in the design and development of high quality Hydraulic equipment.

Our current product range includes :-

“A” Axial Piston Thruster Motors purpose designed for R.O.V applications. Fixed and variable capacities from 11.5 to 125 cm³/rev.

“C” Axial Piston Pumps for high accuracy fluid metering with precision flow controls and high-pressure capability. Specifically designed for the Polyurethane Industry. Capacities from 3 to 62 cm³/rev.

“XL” Cam Motors of radial piston configuration. Wheel/shaft/torque module configurations. Design offers high-speed capability. Capacities from 150 to 1120 cm³/rev.

“XF” Cam Motors of radial piston configuration. NEW generation design, developed from the proven technology of the “XL” but with a smaller envelope, radial ports & more displacement.

“XK” Cam Motors radial piston configuration offering static/dynamic brakes, single/2 speed, wheel/shaft & torque-module mount options. Heavy-Duty External Load & High-Speed options. Capacities from 1000 to 5000 cm³/rev.

“SMA” Motors heavy-duty radial piston/eccentric configuration, offering excellent life. Withstands high mechanical and hydraulic shock loads. 350bar Continuous pressure rating. Speed & power ratings significantly greater than standard HTLS motors. Displacements from 150 to 10500 cm³/rev.

Wholly owned subsidiaries in the USA and Germany and a network of distributors throughout the world provide product support in most countries.

ROTARY POWER is a company within British Engines (UK) Ltd group, which was established over 50 years ago.

The British Engines group of companies design manufacture and market a wide range of engineered products for offshore, electrical, construction, engineering and other industries, employing nearly 700 people on a 4600 sq m site in Newcastle upon Tyne, England.

XF FEATURES

Modular Concept

- Common torque unit with shaft or wheel motor housings

Pintle Design

- No axial bearing thrust support required

High Pressure Rating

- Designed to operate up to 420bar peak pressure

High Start Output Torque

- Pintle valve reduces mechanical losses

High Reliability

- Few moving parts

Low Maintenance

- Sealed/lubricated bearings in shaft and wheel motors

High Radial Load Capacity

- Heavy duty tapered roller bearings as standard

Freewheel

- True (zero displacement) available

Fully Reversible

- Equal torque in both rotation directions

Compact

- High power to weight ratio and minimum overall dimensions

XF STANDARD OPTIONS

- Speed sensor
- SAE or “G” ports
- Axial ports
- Viton seals


Customised solutions are available -
Please consult Rotary Power

XF COMPACT PISTON MOTORS

PAGE	CONTENTS
2	TECHNICAL DATA
3	ORDER CODE
4	TORQUE UNIT DIMENSIONS
4	TORQUE UNIT CUSTOMER MOUNTING DIMENSIONS
5	TORQUE UNIT L10 LIFE
6	SHAFT MOTOR DIMENSIONS (Spline)
6	SHAFT MOTOR FRAME MOUNTING DIMENSIONS
7	SHAFT MOTOR DIMENSIONS (Key)
7	SHAFT MOTOR RADIAL LOAD LIMITS & L10 LIFE
8	WHEEL MOTOR DIMENSIONS
9	WHEEL MOTOR FRAME MOUNTING DIMENSIONS
9	WHEEL MOTOR RADIAL LOAD LIMITS & L10 LIFE
10	HYDRAULIC CONNECTIONS
11	OPTION (Shaft-up air vent port)
11	OPTION (Speed-sensor)
12	POWER ENVELOPES
12	DUTY CYCLE DATA
13	TORQUE OUTPUT
13	INPUT FLOW
14	NO LOAD PRESSURE DROP
14	CASE LEAKAGE
15	MINIMUM BOOST PRESSURE (Pumping)
15	FREEWHEELING
16	INSTALLATION & COMMISSIONING
17	RP MOTOR PRODUCT OVERVIEW



XF MOTOR OPERATION

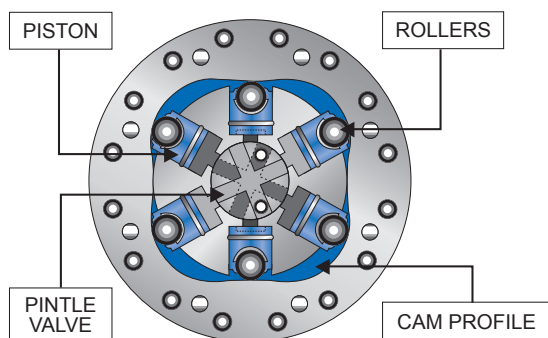

Oil is fed under pressure through the valve and into the cylinders. The pistons attempt to move outwards. The rollers react on the incline of the cam profile and this action produces rotation of the cylinder block.

Each piston completes four strokes per revolution of the motor. The symmetrical arrangement balances hydraulic forces, eliminating the need for bearings.

TECHNICAL DATA

Displacement Code	A	B	C	D	-
Displacement Nominal	390	490	560	680	cc
Displacement Actual	392.7	493.1	558.6	680.9	cc
Theoretical Torque at 100 bar	625	785	889	1084	NM
Max Speed	500	500	450	370	rpm
Max Freewheel Speed	850	850	850	850	rpm
Max Power	50				kW
Max Main Port Pressure*	420				bar
Max Case Port Pressure	7				bar
Min Viscosity	15				cSt
Max Viscosity	2000				cSt
Optimum Viscosity Operating Range	35 to 200				cSt
Fluid Type Min Requirements	HL; HLP to DIN 51524				
Fluid Cleanliness	NAS 1638 Class 9 ISO Code 18/15				
Min Fluid Operating Temperature	-30 (Nitrile); -20 (Viton)				°C
Max Fluid Operating Temperature	+80				°C
Optimum Temperature Range	+40 to +70				°C

*Peak; Max 1% of every 1 duty cycle minute (Typical Relief Valve pressure spike)

GENERAL NOTES ON FOLLOWING TECHNICAL DATA

- All dimensions are in mm.
- General dimension tolerances; +/- 0.25mm
- Material specifications provided are for guidance & should only be used to support end-user's finalised design.
- Motor performance data is provided to assist in the optimum selection of displacement & frame size. However, where system pump maximum capacity is close to full utilisation, actual flow & case leakage measurements should be obtained, under worst-case operating conditions.
- All tightening torques given are based on the safe motor operation at the specified external load envelope & maximum output torque. Screws are assumed to be un-lubricated & exhibiting a friction coefficient (Torque /Induced Tensile Load x Nominal Diameter)in the range 0.19 – 0.25 {Screw Grades are minimum requirements}


Symbols;



Motor inlet flow direction



Motor shaft rotation direction



Dry weight



Screw tightening torque (unlubricated)



Care warning

ORDER CODE

1,2,3,4	5	6,7	8	9	10	11	12,13	14,15	<i>digits</i>
XF05	D	S2	A	1	N	0	AA	02	

CC/REV	
A	390cc
B	490cc
C	560cc
D	680cc

DESIGN SERIES	
02	Factory specified

SPECIAL CODES (consult RP)	
AA	Standard

GENERAL OPTIONS	
0	Standard
1	Shaft-up air vent port

SEALS	
N	Nitrile
V	Viton

FRONT HOUSING STYLE		
N0	Torque unit	No front housing
S0	Shaft	Metric splined shaft
S1		Metric keyed shaft
S2		ANSI splined shaft
W0	Wheel Flange	Flange with clearance holes
W1		Flange with threaded mounting holes
W2		Flange fitted with studs
W3		Flange fitted with studs + nuts

REAR HOUSING OPTIONS	
0	None
1	Rear mounted speed sensor facility
2	Oversized drain ports ##
3	Options 1+2 combined

Axial ports only


REAR HOUSING STYLE/PORTS		
Standard mount	A	Radial SAE O-ring ports
	B	Radial 'G' ports
	C	Axial SAE O-ring ports
	D	Axial 'G' ports
Steering pivot mounting #	R	Radial SAE O-ring ports
	S	TBA
	T	TBA
	U	TBA

Consult Rotary Power for details


EXAMPLE SHOWN;
XF05-D-S2-A-1-N-0-AA-02 680cc ANSI splined shaft Standard mount Radial SAE O-ring ports Rear mounted speed sensor facility Nitrile seals

XF05 RADIAL PISTON MOTORS

TORQUE UNIT (XF05*N0A0*0AA**)

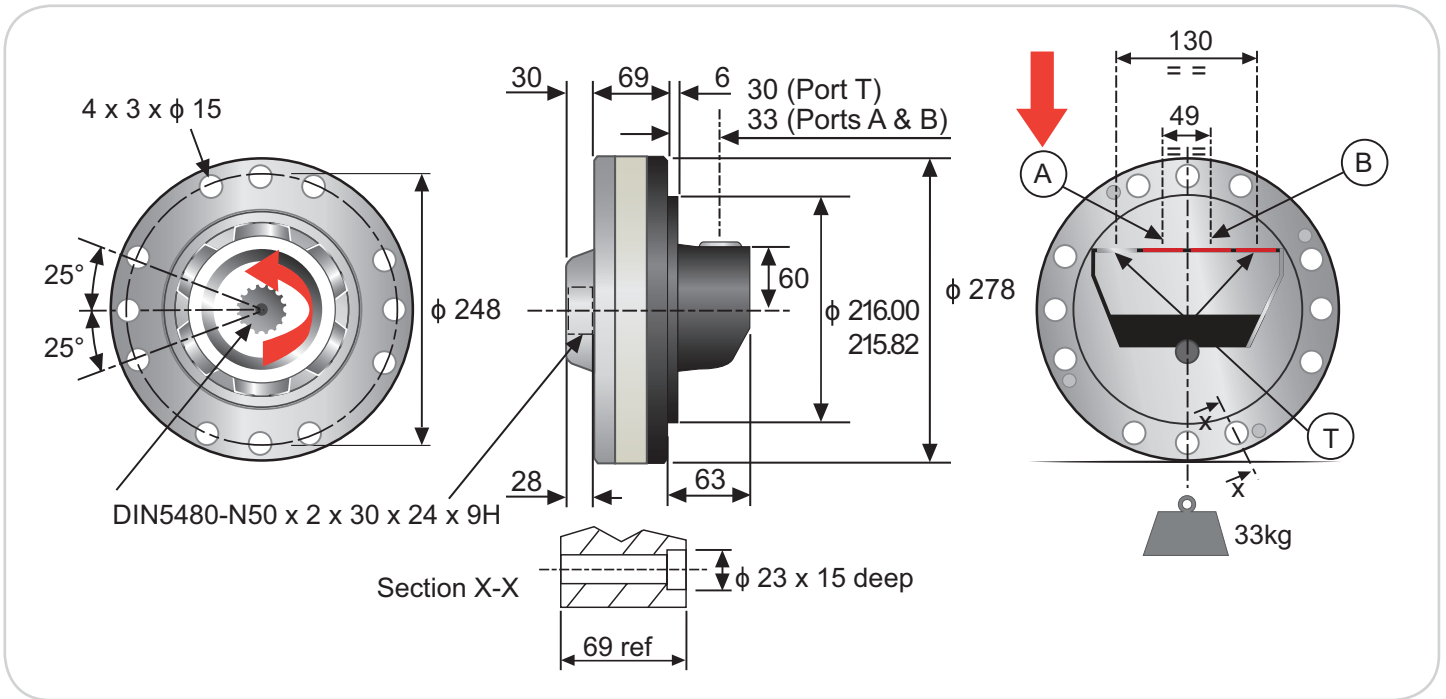

CUSTOMER MOUNTING

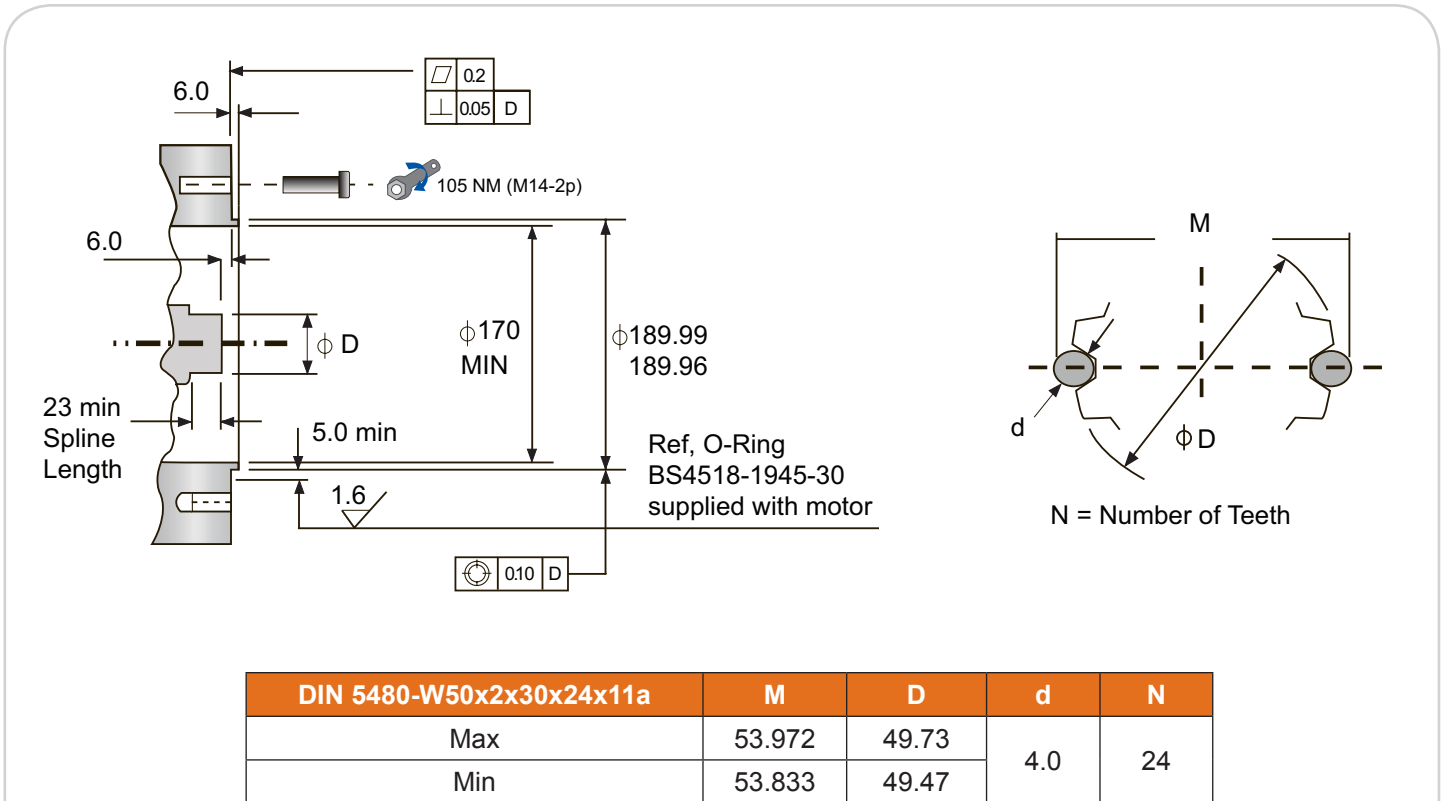


Shaft Material; BS970 -709M40 or equivalent - hardened to achieve $R_m = 775 - 925 \text{ N/mm}^2$

Housing Material; $R_m \geq 320 \text{ N/mm}^2$ (fixing screw thread engagement of 20mm minimum is assumed)

TORQUE UNIT

L10 LIFE

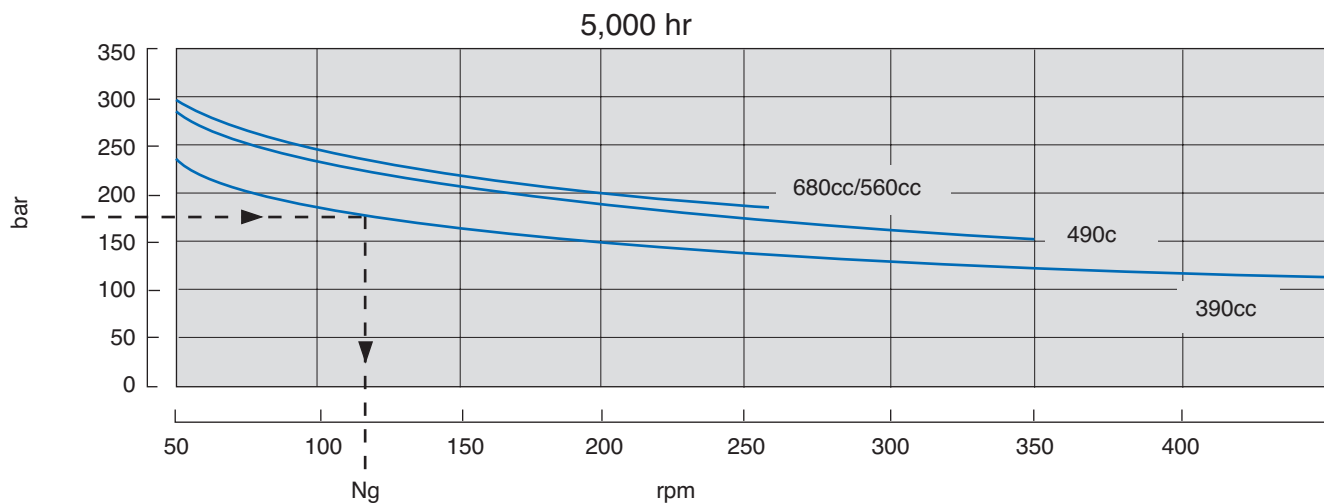

L10 values predict that 90% of a given population of motors will meet or exceed this life. Actual life will be dependent on oil viscosity, temperature and oil cleanliness together with application factors. For optimum life, oil viscosity should be in the "optimum" range specified on page 3. Consult RP, for motor applications where low speeds form a significant part of the duty cycle. For max weighted $\Delta P > 150\text{bar}$ consult RP –see duty cycle pg.12


For a given pressure P [bar] & speed N [rpm];
 $N_g[\text{rpm}] = \text{Graph speed, for given cam displacement \& pressure P.}$
 $\text{New L10 [hr]} = \text{Graph Hours} \times N_g / N$

Example;
 For 390ccCam, Pressure P = 175bar & speed N = 200 rpm;
 From graph, using the 390cc line @ 175bar; $N_g = 120 \text{ rpm}$
 Thus; $L10 = 5,000 \times 120/200 = 3,000 \text{ hr}$

XF05 RADIAL PISTON MOTORS

SHAFT MOTOR

SHAFT MOTOR SPLINED

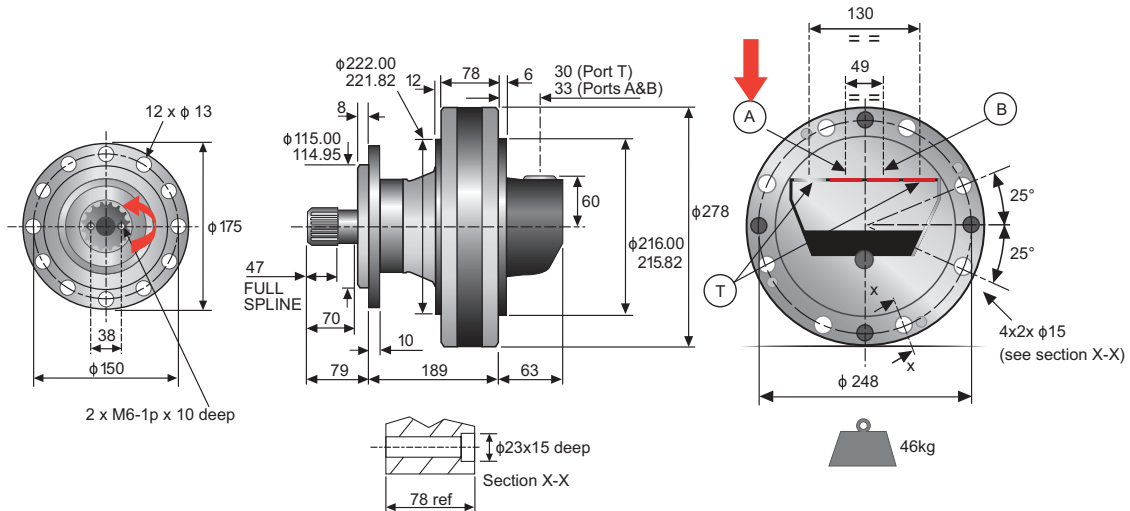


METRIC SPLINE (XF05*S0A0*0AA**)

DIN 5480-N55x3x30x17x9H	P	E	d	N	A	B	C
Max	43.963	49.13	5.25	17	56.5	69	25
Min	43.866	48.87					


ANSI SPLINE (XF05*S2A0*0AA**)

ANSI B92.1 Flat Root Side Fit 8/16 Pitch, Class 5	P	E	d	N	A	B	C
Max	42.931	47.80	5.49	16	56.0	69	25
Min	42.861	47.67					

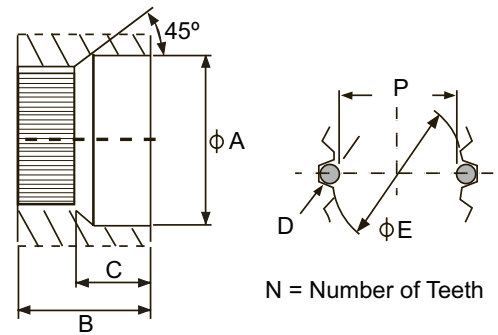



Coupling Material; BS970 -709M40 or equivalent - hardened to achieve Rm = 775 - 925 N/mm2

SHAFT MOTOR - FRAME MOUNTING OPTIONS

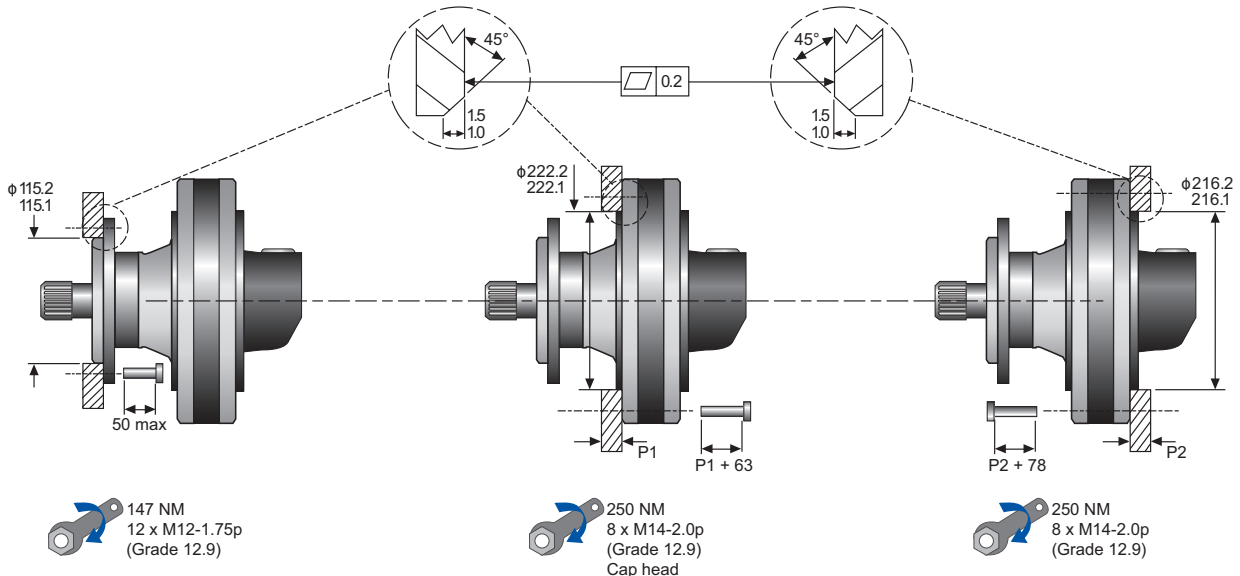

SHAFT MOTOR

SHAFT MOTOR KEYED (XF05*S1A0*0AA**)

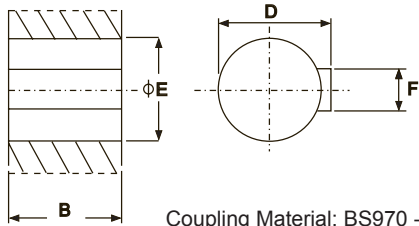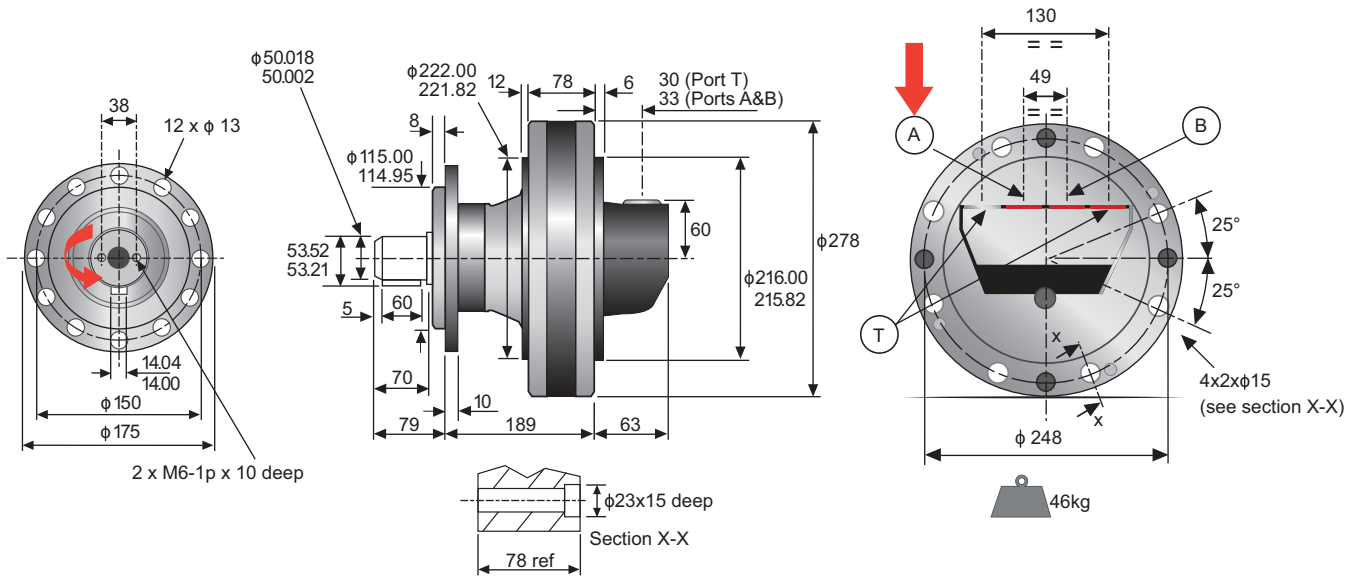

	E #	B	D	F
Max	50.080	69	54.0	14.12
Min	50.030		53.8	14.05

This clearance fit is only suitable for motoring $\Delta P < 100\text{bar}$. Use interference fit for motoring $\Delta P > 100\text{bar}$, to prevent yield of key material



Coupling Material; BS970 -709M40 or equivalent - hardened to achieve $R_m = 775 - 925 \text{ N/mm}^2$

SHAFT MOTOR - EXTERNAL RADIAL LOADS

Maximum Static Axial Load $F_a = \pm 35\text{kN}$ ($F_r = 0$)

Consult Rotary Power, for applications combining radial & axial dynamic loads.

Radial Load Limits & L10 Life:

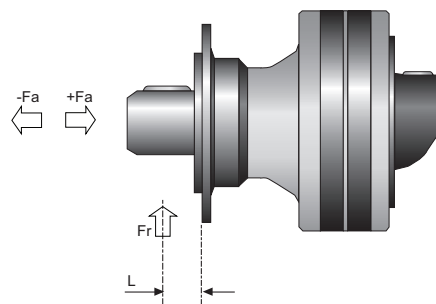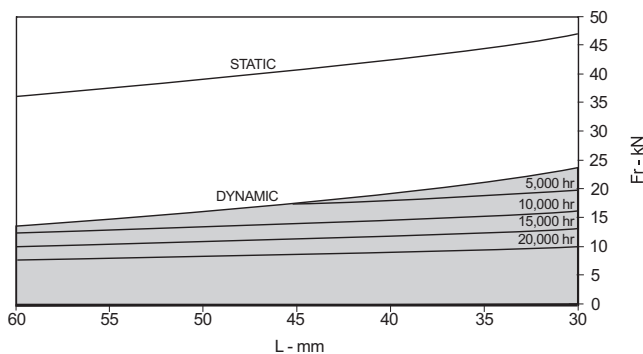


L10 values predict that 90% of a given population of motors will meet or exceed this life. Actual life will be dependent on oil viscosity, temperature and oil cleanliness together with application factors. Graph shows motor bearing housing taper roller bearing L10 data @ 100rpm* & ISOVG 37 oil @ 40C (38cSt) (*L10 hours@ N rpm; multiply "Graph L10" by ratio "100rpm/N rpm") Pressure has no direct effect on the L10 data shown (see also Torque Unit L10) Graph Max Dynamic loads assume $\Delta P = 150 \text{ bar}$ (max weighted motor rating) For $\Delta P > 150 \text{ bar}$ consult RP. (See duty cycle pg.12)


XF05 RADIAL PISTON MOTORS

WHEEL MOTOR


WHEEL STUDS (XF05*W2*0*0AA*)

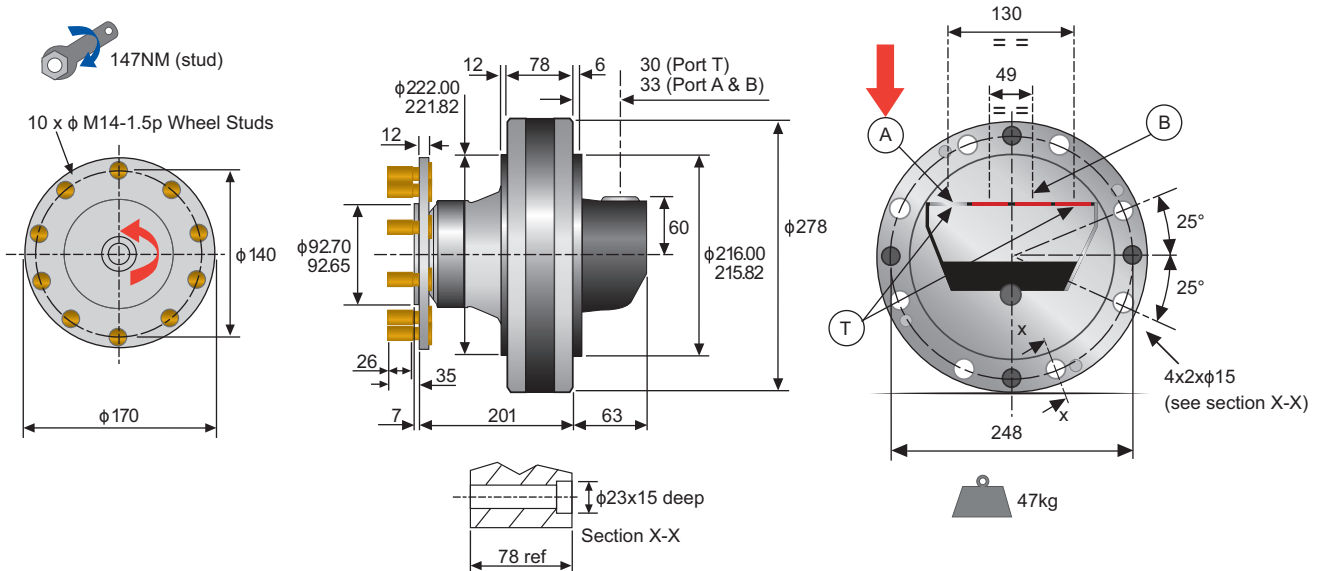


WHEEL STUDS WITH NUTS - XF05*W3*0*0AA**

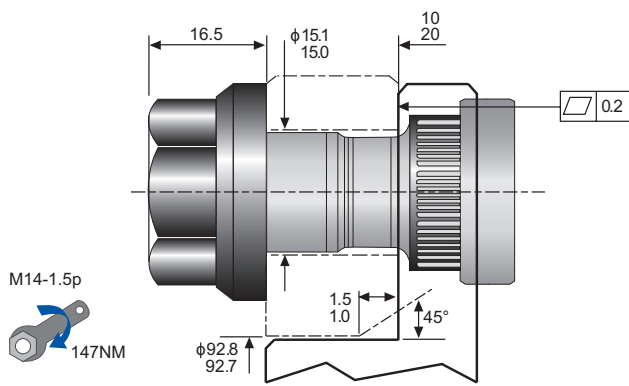

THREADED MOUNTING HOLES - XF05*W1*0*AA*

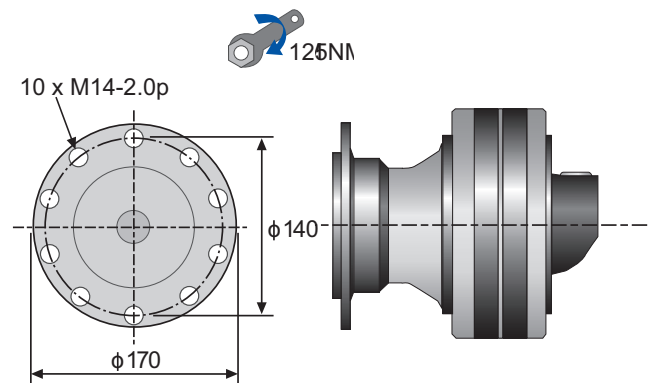


CLEARANCE MOUNTING HOLES - XF05*W0*0*0AA

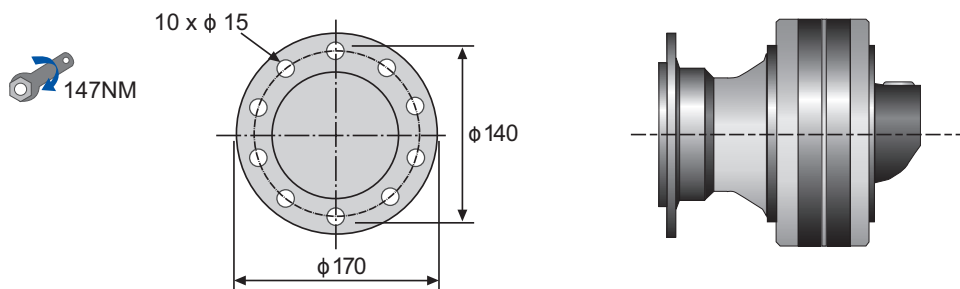

WHEEL MOTOR



WHEEL MOTOR FRAME MOUNTING OPTIONS

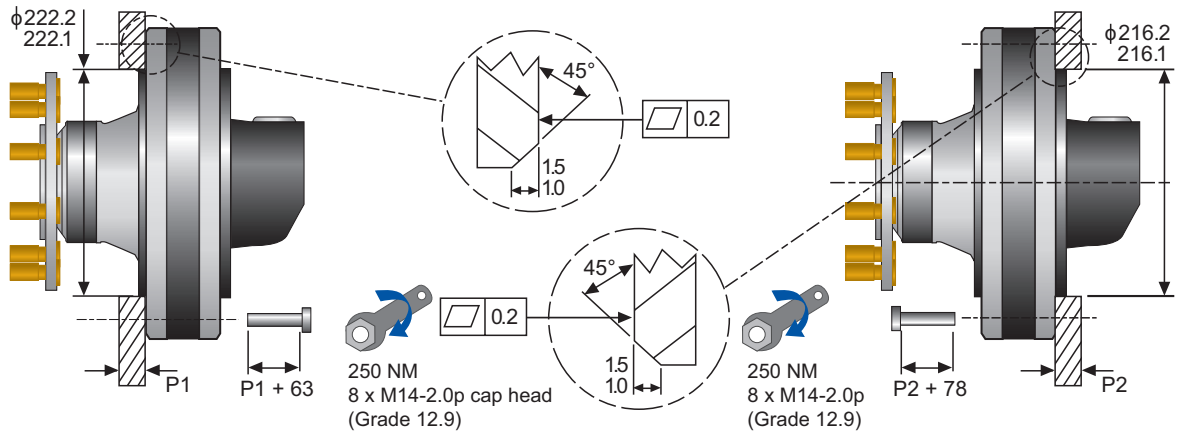

EXTERNAL RADIAL LOADS & L10 LIFE

Consult Rotary Power, for applications combining radial & axial dynamic loads.

Radial Load Limits & L10 Life;

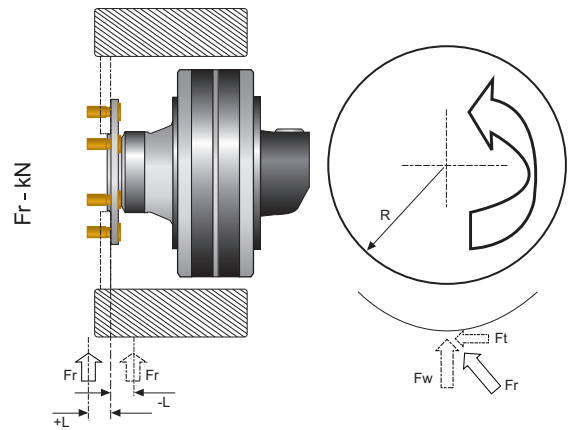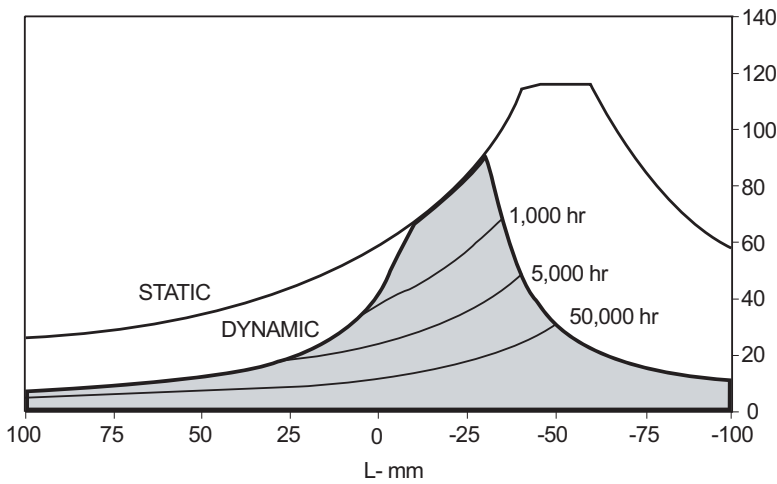


Graph data @ 100rpm*, 20bar back pressure & ISOVG 37 oil @ 40C (38cSt)
 (*L10 hours@ N rpm; multiply "Graph L10" by ratio "100rpm/N rpm")
 Pressure has no direct effect on the L10 data shown (see also Torque Unit L10)
 Graph Max Dynamic loads assume $\Delta P = 150$ bar (max weighted motor rating)
 For $\Delta P > 150$ bar consult RP
 $Fr = \sqrt{(Ft^2 + Fw^2)}$ where; Ft [kN] = Motor Torque [kN.M]/R[M] & Fw = Wheel Vertical Load[kN]

(Motor torque may be derived from "Torque Output" graphs on page 15, once the actual pressure differential at the motor ports is determined)

HYDRAULIC CONNECTIONS


STANDARD PORTS

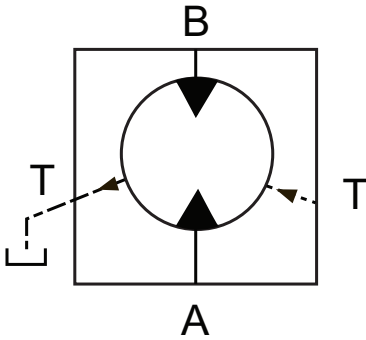

MOTOR CODE	PORTS "A" & "B"	PORT "T"
XF05***A1*0AA**	3/4" SAE J514 (1 1/16" - 12 UNF)	5/8" SAE J514 (7/8" - 14 UNF)
XF05***B1*0AA**	ISO 228/1 G 3/4"	ISO 228/1 G 1/2"


AXIAL PORTS

MOTOR CODE	PORTS "A" & "B"	PORT "T"
XF05***C1*0AA**	3/4" SAE J514 (1 1/16" - 12 UNF)	5/8" SAE J514 (7/8" - 14 UNF)
XF05***D1*0AA**	ISO 228/1 G 3/4"	ISO 228/1 G 1/2"

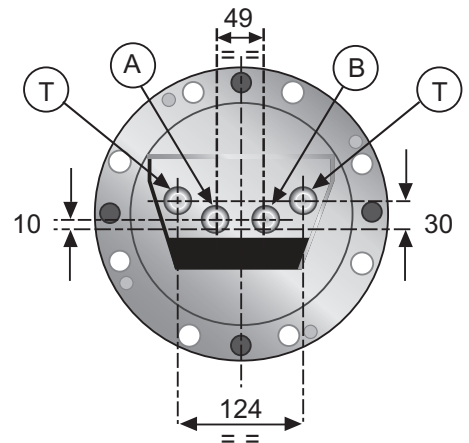


OVERSIZE DRAIN PORTS (AXIAL PORTS ONLY)

MOTOR CODE	PORTS "A" & "B"	PORT "T"
XF05***C3*0AA**	3/4" SAE J514 (1 1/16" - 12 UNF)	3/4" SAE J514 (1 1/16" - 12 UNF)
XF05***D2*0AA**	ISO 228/1 G 3/4"	ISO 228/1 G 3/4"
XF05***D3*0AA**		

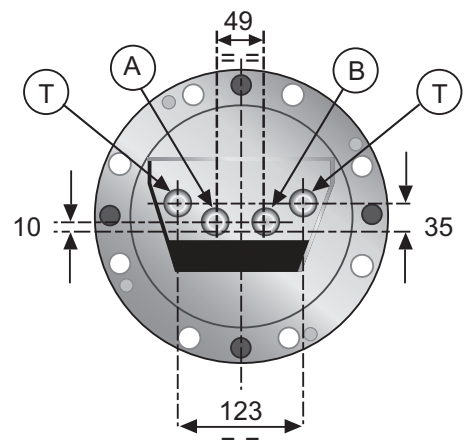

OPTIONS

SHAFT-UP AIR VENT PORT (XF05*****1AA**)

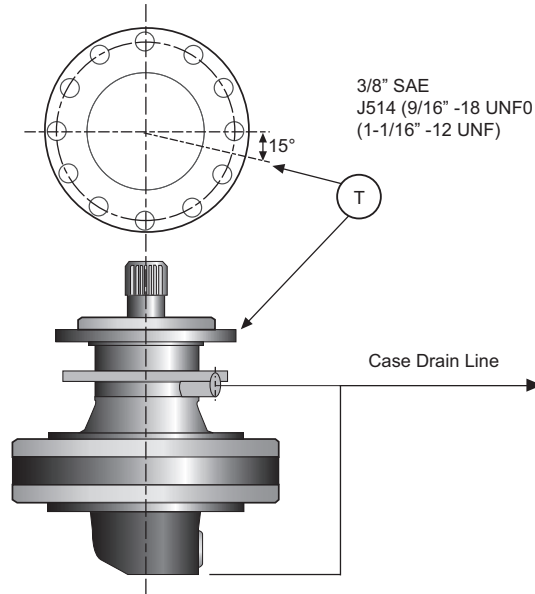


! Ensure drain line routing prevents air traps forming


SPEED SENSOR

! PRIOR TO ADJUSTING THE SPEED SENSOR ENSURE THE ROTOR IS POSITIONED TOWARDS THE PORTS. THIS CAN BE ACHIEVED BY STANDING THE MOTOR VERTICALLY, WITH THE PORTS ALONG THE BOTTOM.

MAINTAIN 0.5 GAP!
(0.5 COUNTER-CLOCKWISE ROTATION FROM SENSOR CONTACT POSITION)

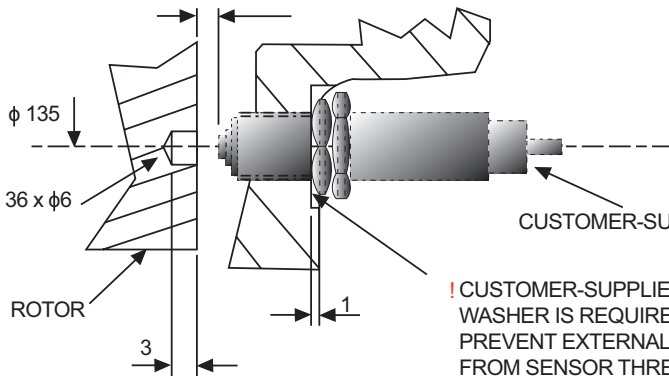

SECTION X-X




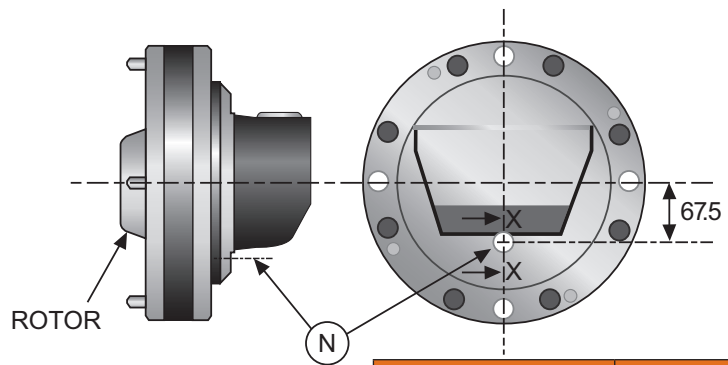


MOTOR CODE	PORT "N"
XF05*****1*0AA**	M12-1.0p
XF05*****3*0AA**	


XF05 RADIAL PISTON MOTORS

PERFORMANCE

POWER ENVELOPES

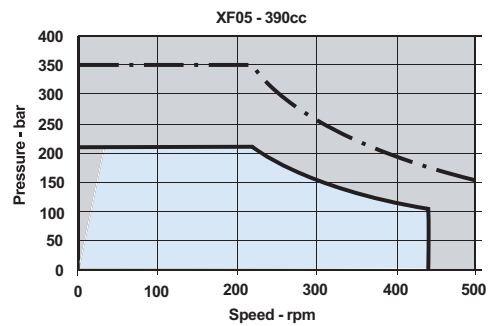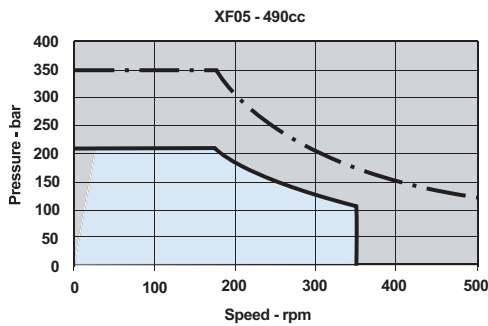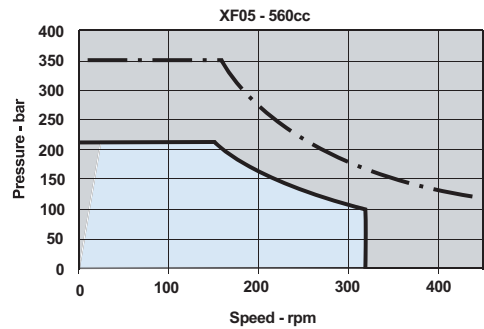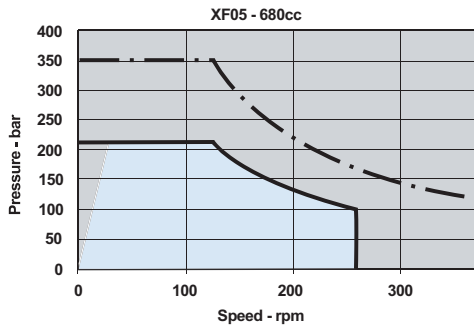

**CONTINUOUS
OPERATION**



**INTERMITTENT
OPERATION**

For optimum motor life, operation should be limited to the "Continuous Operation" envelope of the above graphs. Intermittent operation may occur for 10% of every minute, as part of a known duty cycle. Maximum Intermittent Pressure would typically be the Relief Valve setting, for mobile applications. For operation with sustained periods >10% of every minute outside the "Continuous Operation" envelope, consult RP.

DUTY CYCLE

Pressure (weighted) Maximum = 150bar - **Example;**

TIME (%)	SPEED (rpm)	PRESSURE (bar)
5	50	210
70	200	80
25	100	160



TIME (%)	SPEED (rpm)	REVOLUTIONS IN 10,000 HOUR LIFE #	%N REVOLUTIONS #	$p(10/3) \times \%N$
5	50	1.5×10^6	1.5%	825,700
70	200	84×10^6	83.5%	1,842,128
25	100	15×10^6	15%	3,335,476
Σ		100.5×10^6	100%	6,003,304



$P(\text{weighted}) = (6,003,304)^{0.3} = 108 \text{ bar}$


#Example;
 $50\text{rpm} \times 60 = 3,000 \text{ revolutions/hr}$
 $5\% \text{ of } 10,000\text{hr} = 500\text{hr}$
 Thus;
 $\text{Revolutions} = 500 \times 3,000 = 1.5 \text{ million}$

$\text{Total Revolutions in } 10,000 \text{ hr} = 100.5 \text{ million}$
 Thus;
 $\% \text{ Revolutions in } 10,000 \text{ hr}$
 $\text{@ } 50\text{rpm}/210\text{bar} = 1.5/100.5 = 1.5\%$

! If P (weighted) > 150bar, consult RP


PERFORMANCE

TORQUE OUTPUT

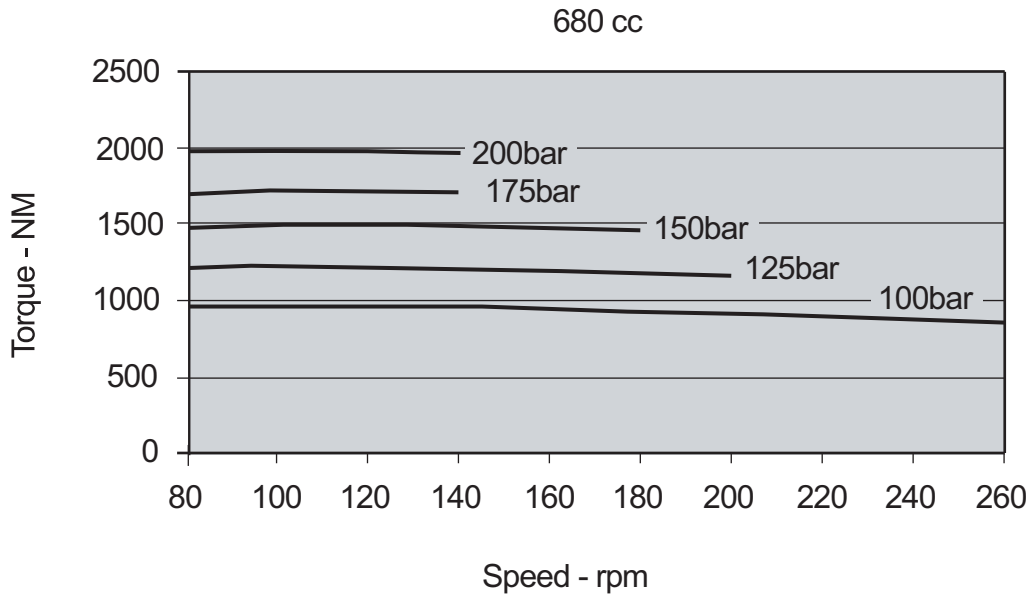

20bar back pressure & ISOVG 37 oil @ 40C (38cSt) Above performance is indicative only. Actual performance is dependent on the motor running-in period, operating viscosity & motor return-line pressure.



INPUT FLOW

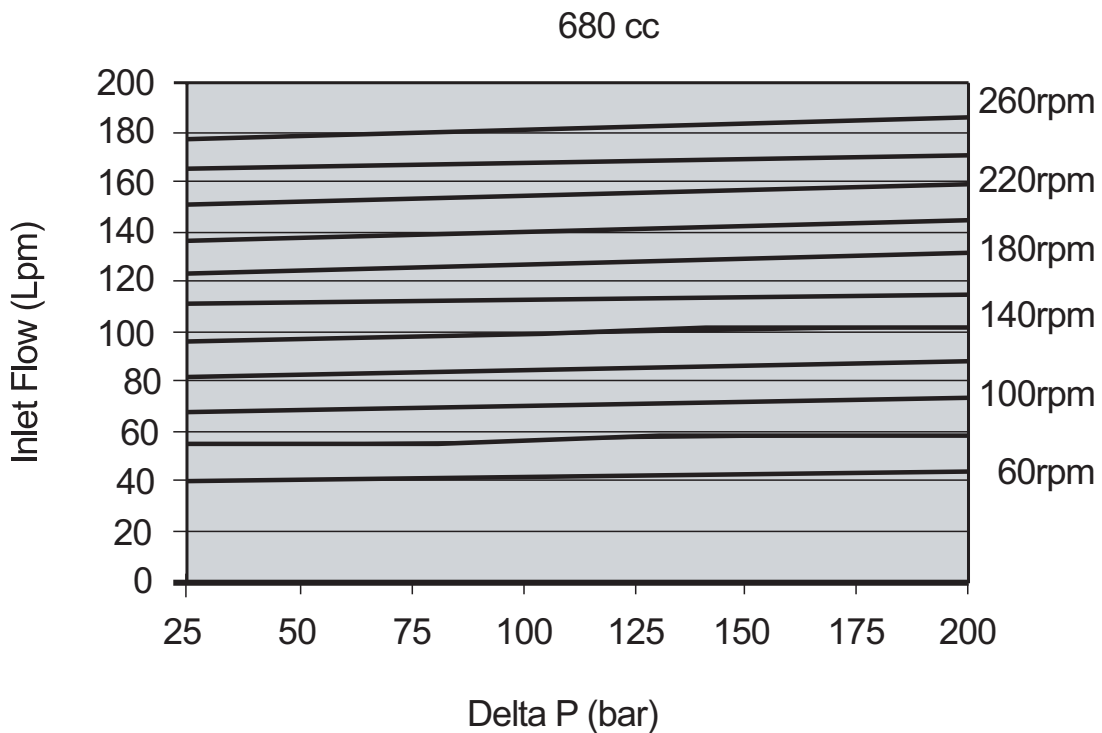

20bar back pressure & ISOVG 37 oil @ 40C (38cSt) Above performance is indicative only. Actual performance is dependent on the motor running-in period, operating viscosity & motor return-line pressure..


PERFORMANCE

NO LOAD PRESSURE DROP

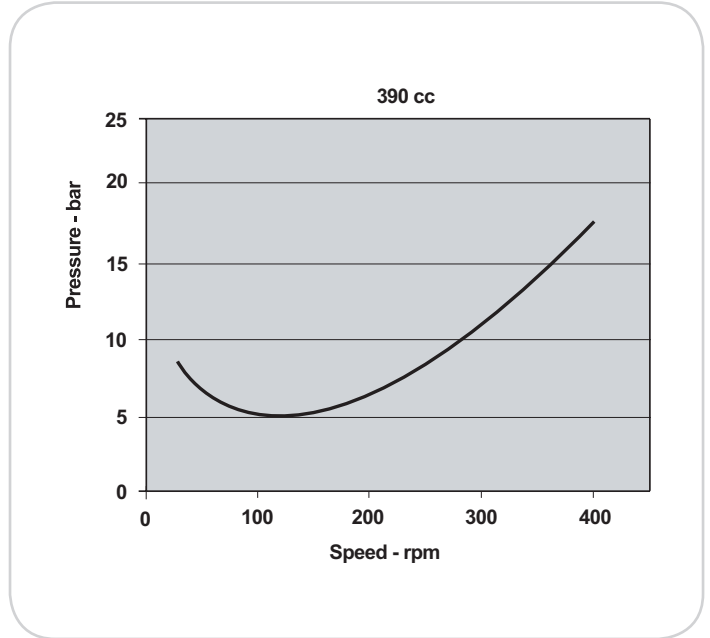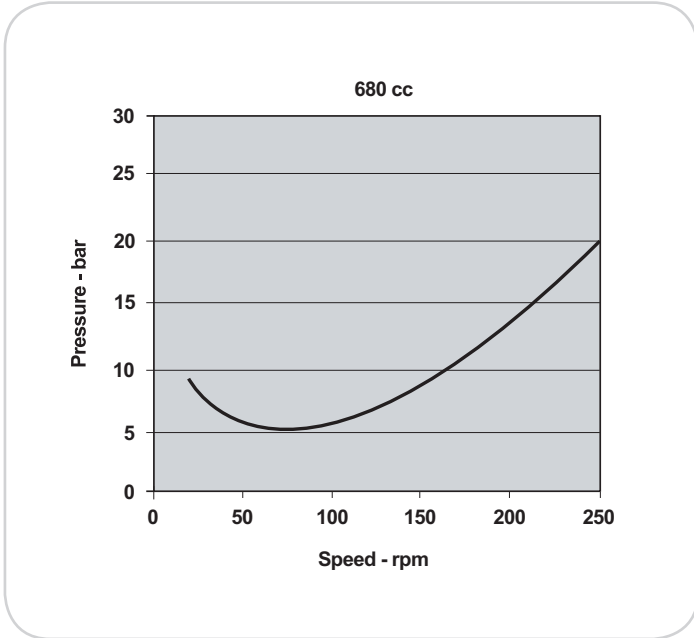

Differential pressure across the main ports required to drive the motor over its speed range, with the output shaft disconnected. 20bar back pressure & ISOVG 37 oil @ 40C (38cSt) Above performance is indicative only. Actual performance is dependent on the motor running-in period, operating viscosity & motor return-line pressure.


CASE LEAKAGE

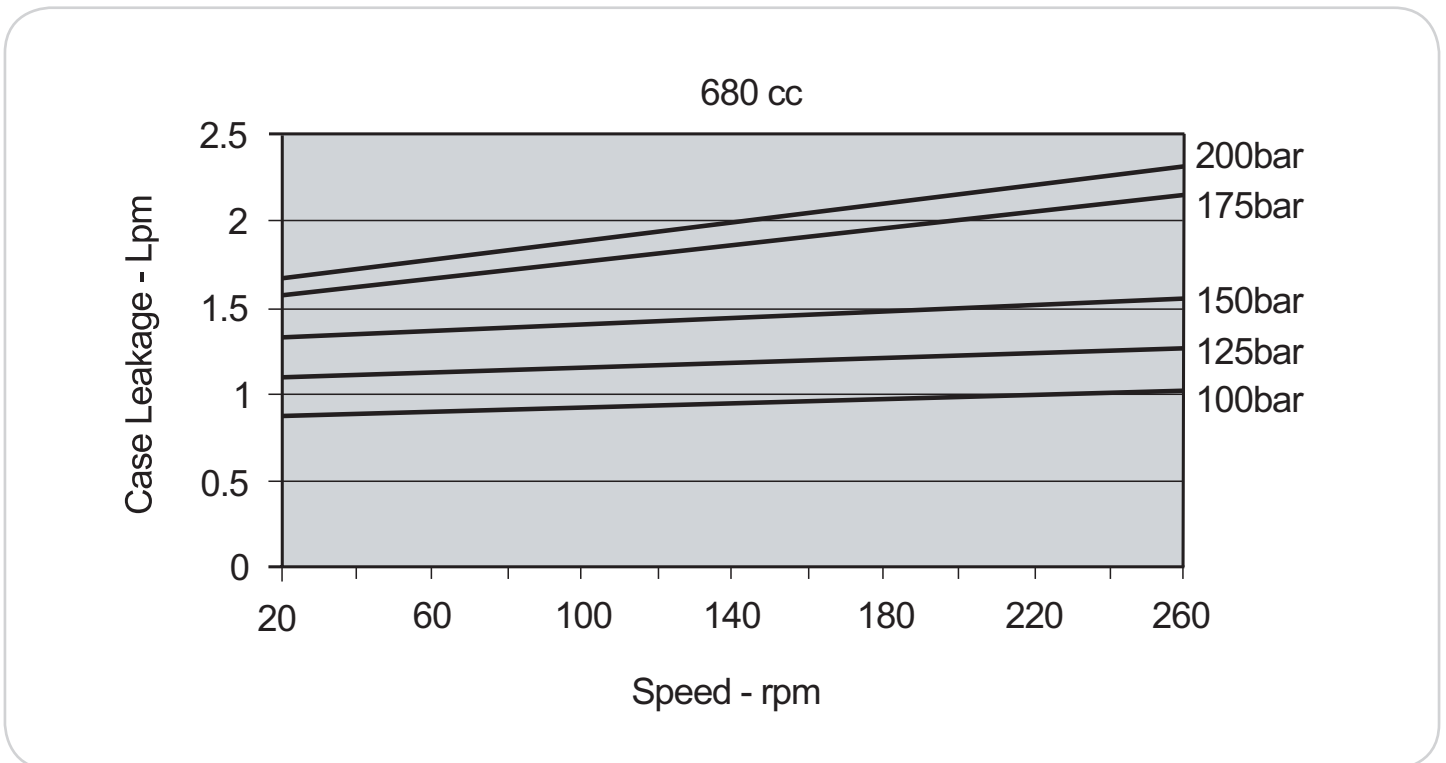

20 bar back pressure & ISOVG 37 oil @ 40C (38cSt) Above performance is indicative only. Actual performance is dependent on the motor running-in period, operating viscosity & motor return-line pressure. It may be necessary to provide a cooling flow (typically 2 LPM) through the motor case, where continuous running conditions produce oil temperature or viscosity values outside the recommended operating range (see Technical Data – page 2)

PERFORMANCE



MINIMUM BOOST PRESSURE (PUMPING)

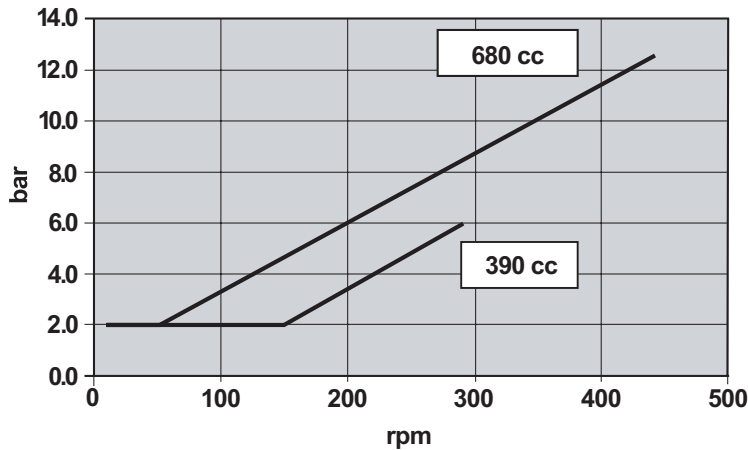

ISOVG 37 oil @ 50C (25cSt)

! Where the shaft torsion load can overrun the motor (i.e. motor is operating as a pump) it is important to ensure sufficient supply boost pressure, to avoid incomplete filling of the cylinders & cavitation. To prevent damaging cavitation, the minimum boost pressure required at the motor inlet port is equal to the sum of the above graph & the actual case pressure.

FREEWHEELING

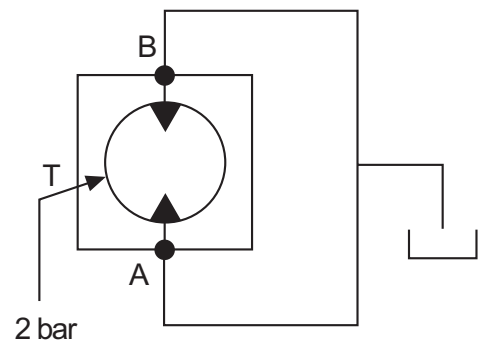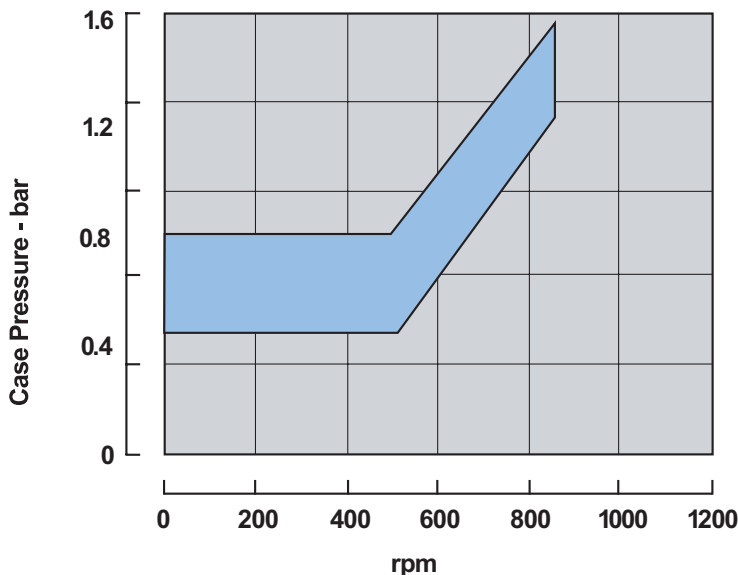

Graph shows case pressure (differential above port pressure) required to retract the motor pistons, for freewheeling operation; 2 bar differential being sufficient to maintain freewheel, under all speed conditions.

Transition into & out of freewheeling is normally accomplished with the motor stationary. ! If this is not practical, then a “soft” re-engagement of the pistons with the cam track is advised, to prevent potential damage to the motor piston bush. This can be achieved by either limiting the pressure in the main lines to 50bar during this transition or by restricting the speed at which the supply pump increases to max flow (1 second minimum, for max freewheel speed)

! In designing the freewheel circuit, care must be taken to ensure that the max case pressure limit, shown on page3, is not exceeded.

INSTALLATION

- Detailed installation drawings are available on request.
- Motor shaft drives should be designed to eliminate unnecessary axial & radial loads; thus prolonging output housing bearing life.
- Keyed shafts are recommended for a flexible coupling output connection.
- Splined shafts are suited to installations where the driven shaft & motor are rigidly mounted.
(*Alignment between motor & driven shaft should be maintained within 0.05mm*)
- For maximum life, splines should be lubricated with Molybdenum Disulphide grease, on assembly, or preferably run in oil lubrication.
- Do not remove protective plugs from hydraulic or speed sensor ports until immediate connection into the system pipe work is made.
- Always examine the motor externally to ensure no damage has been caused in transit.
- Case drain lines, connected to either of the “T” ports indicated, should be returned directly to tank.
- The “T” port should be positioned as the uppermost port, to ensure air is properly vented from the pipe work.
- Where the motor is mounted with shaft uppermost, an air vent port is necessary to ensure proper lubrication of the bearing housing shaft seal (*General Option “1” in Product Code*).
- The bore size of the case drain line should be sufficient to ensure that case pressure does not exceed the maximum specified in “Technical Data” on page 3, under all operating conditions (*especially during cold-start*)
- **!** If the difference between motor case drain temperature & the tank temperature is $> 40^{\circ}\text{C}$, then a case warming flow must be provided, to prevent possible thermal shock damage to the motor.
- For series connection of motors consult ROTARY POWER

COMMISSIONING

- Prior to motor assembly, thoroughly de-scale, clean & flush all pipe work, fittings & oil tank.
- Fill the system with new, filtered oil (*refer to “Technical Data” on page 3 for motor oil requirements*)
- Fill the motor case & drain line with oil through the case drain port “T” & re-connect case drain pipe work.
- Check rotation direction required is consistent with the direction of inlet flow (*see relevant motor dimensional data*)
- Start the drive pump at lowest practical speed to prime the system (*for combustion engines turn over the starter motor for a few seconds at a time. For electric motors use a series of rapid on/off cycles*)
- Run the system at high flow & low pressure & actuate all systems in all modes until all entrained air is purged.
- Check & top-up oil levels if necessary
- Check & adjust settings where necessary, in compliance with all system & component supplier requirements.
- Check steady state operating temperature is in compliance with all system & component supplier requirements.
- Check for & repair any external leaks.
- After the first few hours of running, clean or renew all filters, as appropriate.
- IF IN DOUBT CONSULT ROTARY POWER

APPLICATIONS

AUGER FEEDER DRIVE



CUTTER-HEAD DRIVE



DRUM SCREENER



ASPHALT PAVER



HARVESTER



ROAD PLANER



UK

ROTARY POWER
St. Peters
Newcastle upon Tyne
NE6 1BS
Tel: (0191) 276 4444
Fax: (0191) 276 4462
Email: enquiries@rotarypower.com
www.rotarypower.com



USA

ROTARY POWER INC
6009 West 41st Street
Suite 2, Sioux Falls
SD 57106
Tel: +1 (605) 361 5155
Fax: +1 (605) 362 1949
Email: info@rotarypower.com
www.rotarypower.com

GERMANY

ROTARY POWER
Vertriebsgesellschaft mbH
Nordstrasse 78
52078 Aachen-Brand
Germany
Tel: (0241) 955190
Fax: (0241) 9551919
Email: info@rotarypower.de
www.rotarypower.com

INDIA

ROTARY POWER
6A, Attibele Industrial Area
Anekal Taluk
Bangalore 562 107
Tel: (80) 782 0011
Fax: (80) 782 0013
Email: indiaenquiries@rotarypower.com
www.rotarypower.com

