


Lift Details

- 350kg Maximum Working Load
- Fixed platform 2300mm x 1300mm
- 2940mm Floor to Floor
- ground to mezzanine floor
- 2000mm high double gates at each level
- Electrically interlocked gates
- **Hold to run**, push button, controls at both levels
- Floor mounted, no pit required
- Self-supporting mesh shaft
- Through car loading




Remote power pack
& control box on stand

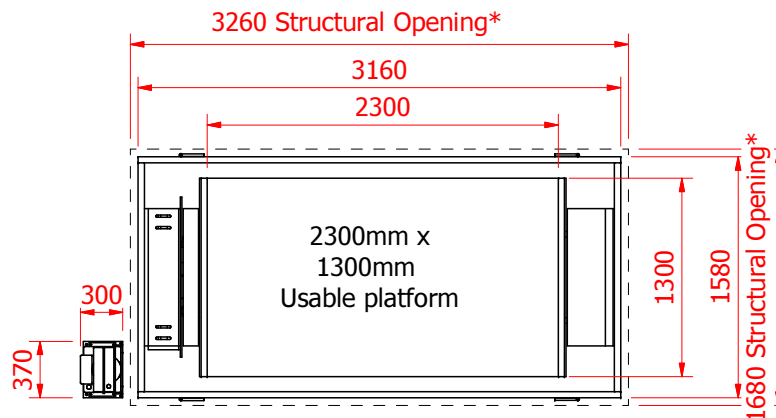

Electrical Supply Req.
2.2kW, 415v, three phase and neutral
terminated in an isolator at the lower level

			Customer Ref.	PH Job Number
Drawn By:	Checked By:	Approved by - Date	Date	Design State WorkInProgress
Title: MezzLift Pro - Opposed Mast Layout Guard Frame Assembly			File Location	Dimensions
			Material As Per Part	Scale on A3
Manual Handling Solutions Tel 01553811977			Projection 1st Angle	Sheet Number
			Drg No. 5000 Guard Frame.iam	5000 Guard Frame
			Edition	

* Minimum structural opening or
sump size if required

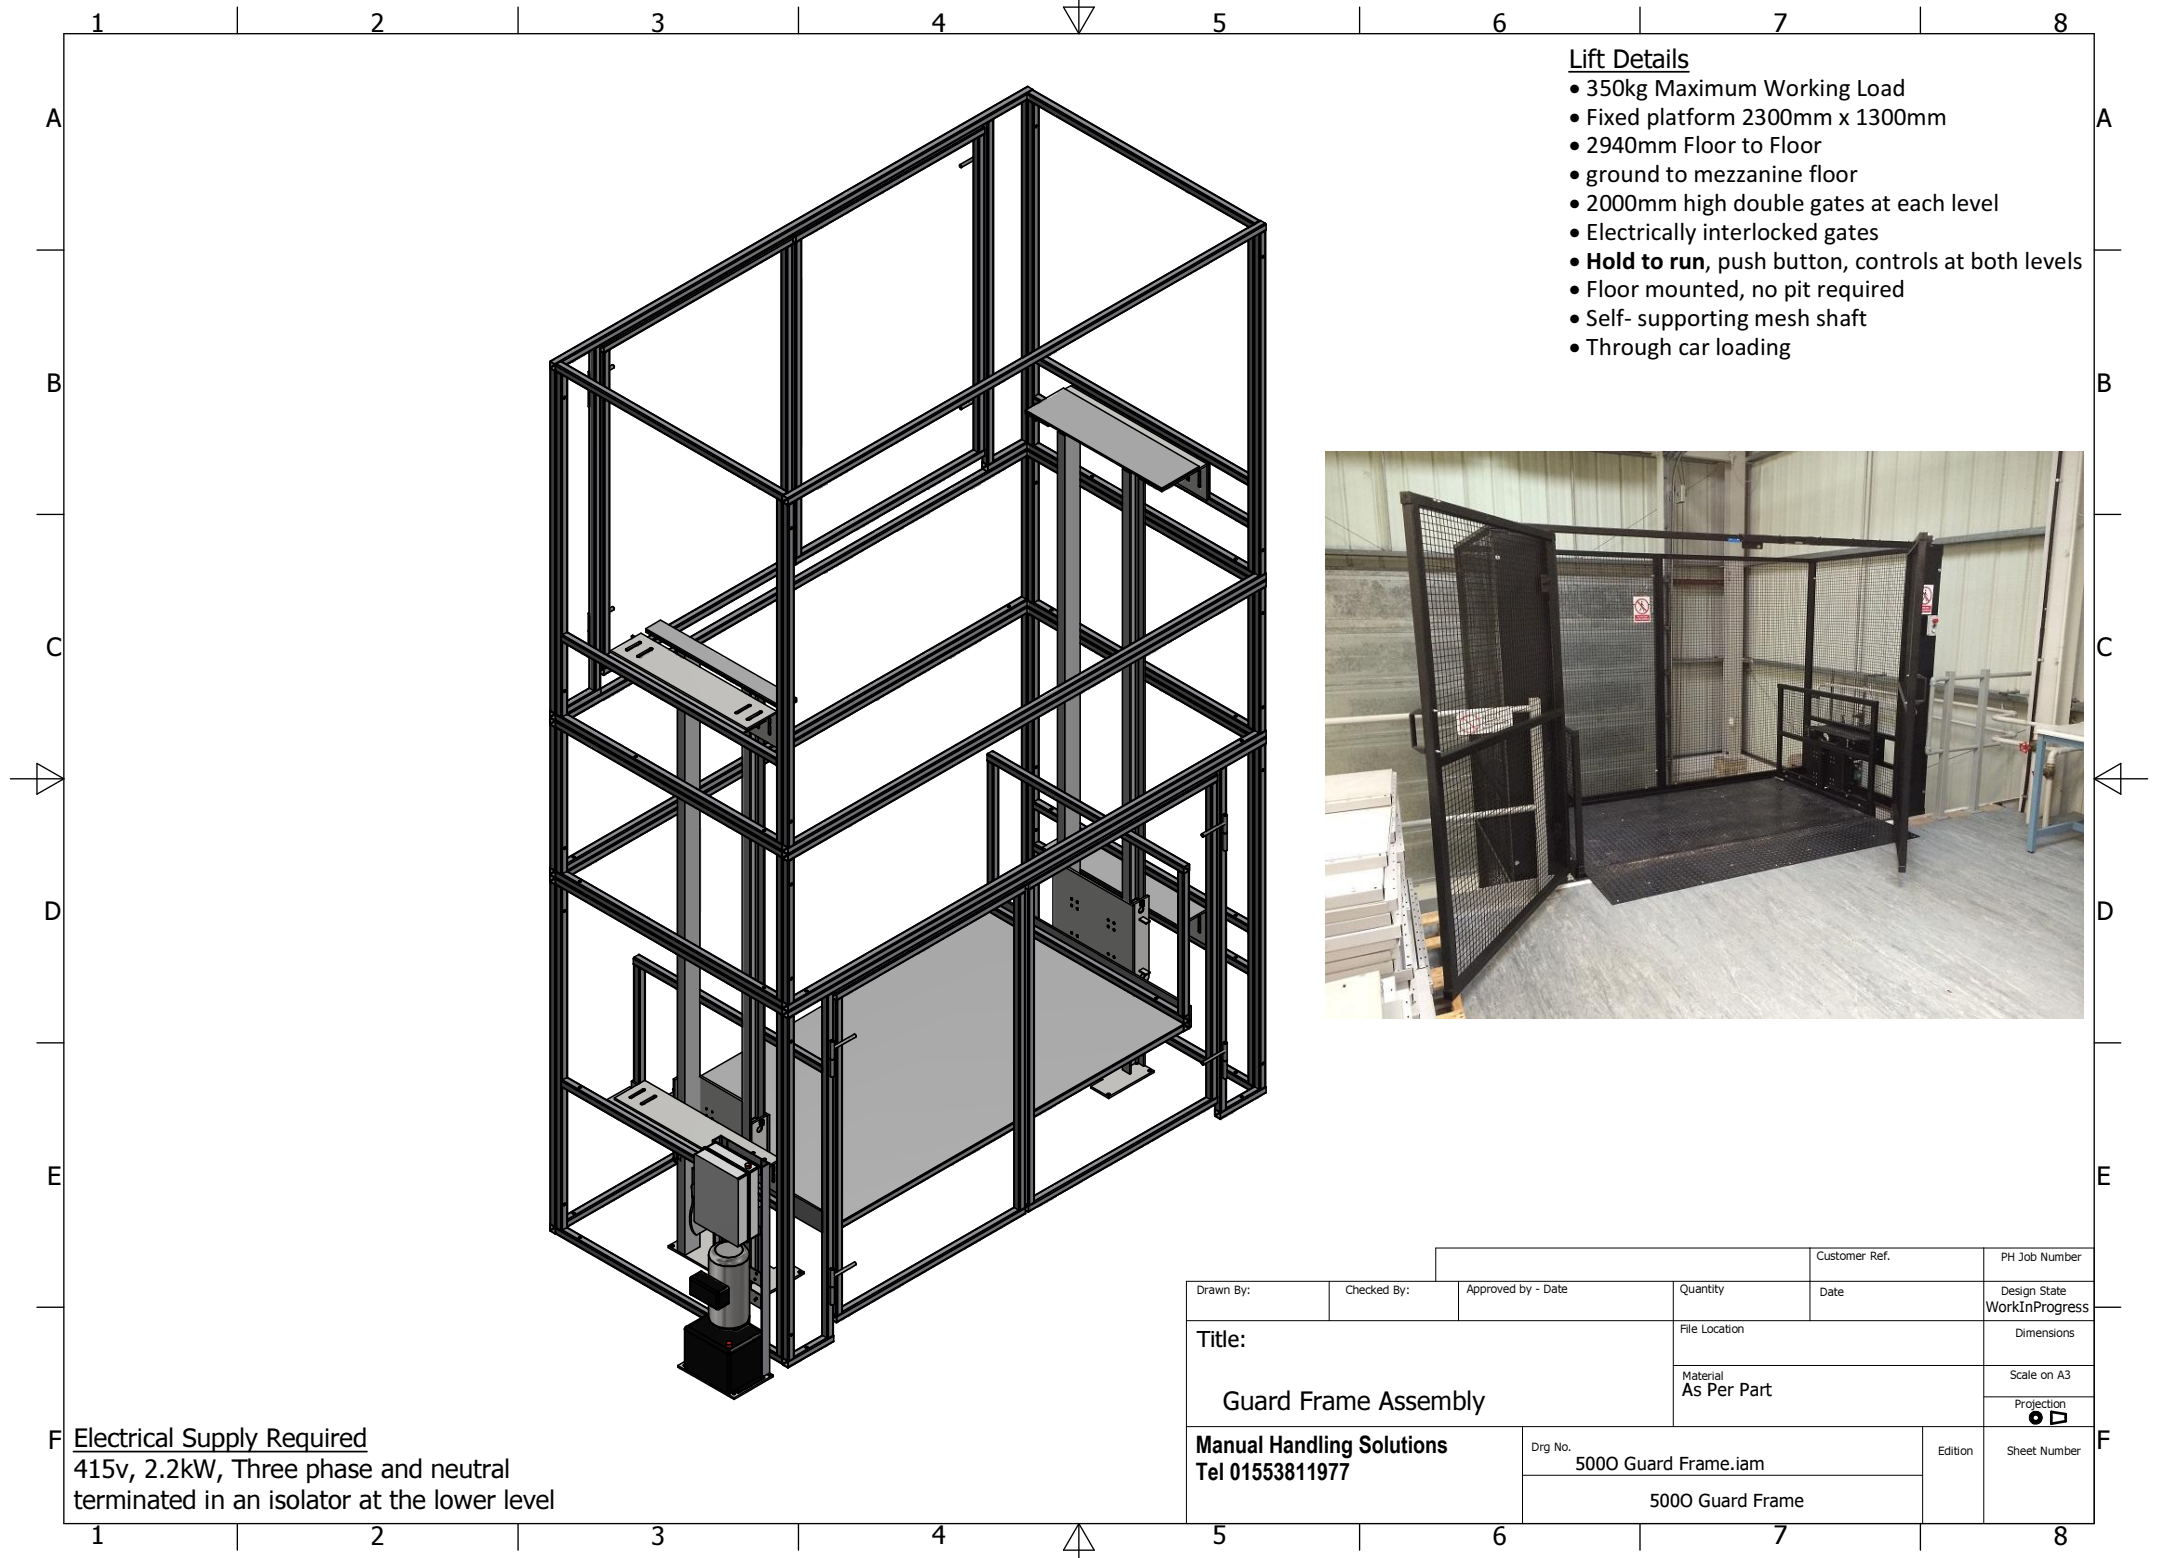

- Lift Details**
- 350kg Maximum Working Load
 - Fixed platform 2300mm x 1300mm
 - 2940mm Floor to Floor
 - ground to mezzanine floor
 - 2000mm high double gates at each level
 - Electrically interlocked gates
 - **Hold to run**, push button, controls at both levels
 - Floor mounted, no pit required
 - Self- supporting mesh shaft
 - Through car loading

Electrical Supply Required
415v, 2.2kW, Three phase and neutral
terminated in an isolator at the lower level

				Customer Ref.	PH Job Number
Drawn By:	Checked By:	Approved by - Date	Quantity	Date	Design State WorkInProgress
Title: Guard Frame Assembly			File Location		Dimensions
			Material As Per Part		Scale on A3
			Projection ● □		Sheet Number
Manual Handling Solutions Tel 01553811977			Drg No. 5000 Guard Frame.iam	Edition	
			5000 Guard Frame		