

See **Page 2** for Product Specification

CUSTOMER APPROVAL SIGNATURE

UNLESS STATED OTHERWISE, GENERAL TOLERANCES TO ISO 2768
 TOLERANCE CLASS 'm' FOR MACHINING & 'V' FOR FABRICATION

Customer Ref.	PH Job Number
---------------	---------------

Drawn By:	Checked By:	Approved by - Date	Quantity	Date 17/06/2015	Design State WorkInProgress
-----------	-------------	--------------------	----------	--------------------	--------------------------------

Title: MHS - Falmouth Exeter Plus Goods Lift 500 kg General Arrangement			Material As per part	Dimensions mm
--	--	--	-------------------------	------------------

Manual Handling Solutions 58, Paige Close, Watlington Kings Lynn, Norfolk PE33 0TQ Tel 01553811977			Part No. Q150725_MEZZi_QUOTE	Scale on A3 1:38
---	--	--	---------------------------------	---------------------

Projection 1st Angle	Material As per part	Reference Q150725	Edition A	Sheet Number 1 of 2
-------------------------	-------------------------	----------------------	--------------	------------------------


Additional Site Requirements

* Minimum structural opening

Falmouth Exeter Plus (Q150725)

Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	500 kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - 3005 mm First to Second Floor - 0 mm
Usable Platform Size	1300 mm (w) x 1300 mm (d)
Platform Guarding	900 mm high barriers to suit loading direction - No gates
Lift Speed	0.2 m/s
Power Supply Required	415 V, 2.2 kW, Three phase and Neutral supply terminated in a double pole isolator at lower level
Controls	Hold to run push button controls (12 v), with emergency stop, adjacent to the gates at each level
Drive Type	Suspension chains with hydraulic motor drive (Twin Mast)
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Load Through
Closed Height	50 mm platform thickness
Ramp	500mm fixed ramp provided
Lift Pit	Floor mounted, no pit required
External Shaft Footprint	2160 mm (w) x 1580 mm (d)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	Electrically Interlocked 2000 mm high double gates
Lift & Guard Colour	standard matt black
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.
Lift Mass (excluding load)	1414 Kg

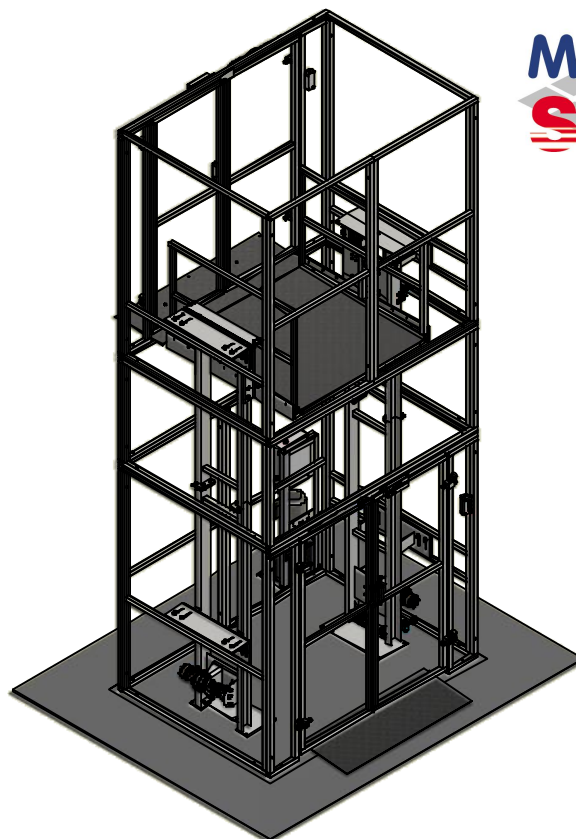

CAD version of your Lift