
IF IN DOUBT ASK

ENCLOSURE: 1900mm x 1660mm **PLATFORM: 1510mm x 1410mm** USABLE AREA: 1350mm x 1350mm

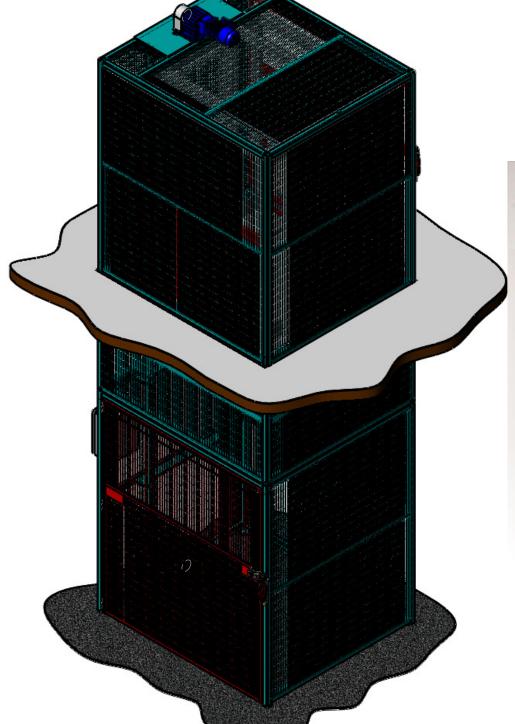

Description: Goods only mezzanine floor lift, with no operator access to platform for loading/unloading

Capacity: 300kg uniformly distributed over platform

Enclosure: Free standing for positioning adjacent to mezzanine floor

Gates: electrically and mechanically interlocked

Enclosure extending approximately 2.3m above mezzanine floor

Access through gate 1.9m high

Controls: Hold to run controls at both levels **Duty cycle:** One operation every 15 minutes

Power requirements: 13 Amp, single phase, 240 Volt

Lift mechanism: Direct motor on chain drive **Structure:** Enclosure to be three sections:

Standard lower section (2.15m high) supply fully assembled and wired

with platform installed

Upper section (2.3m high) - standard c/w limit switch and gate interlock supplied wired with long cable lengths with plugs for easy installation. Mid section - built to order to achieve height required





	THIRD ANGLE PROJECTION	+
	UNLESS OTHERWISE SPECIFI	

DIMENSION TOLERANCES

LINEAR -±0.5mm HOLES -±0.1mm ANGLES -±1° RAD/CHAM -±0.5mm

REMOVE ALL BURRS AND SHARP EDGES

DRAWING. No: D-SP-MZL-250-33873-Presentation-A-A

FINISH: TBD

PART NAME: GOODS ONLY LIFT 300kg CAPACITY MATERIAL: SEE COMPONENTS

WEIGHT: 1433.4 kg.DRAWN:: **APPROVED** 14/05/2013 SHEET: 1 OF 2

No. OFF.

DO NOT SCALE

SHEET SIZE: A3

SHEET SCALE 1:30

REV.	DESCRIPTION	DATE
Α	ISSUED DRAWING	14/05/2013

