

Signed as correct


Name..... Position.....  
 Date.....

See Page 2 for Product Specification

CUSTOMER APPROVAL SIGNATURE

UNLESS STATED OTHERWISE, GENERAL TOLERANCES TO ISO 2768  
 TOLERANCE CLASS 'm' FOR MACHINING & 'v' FOR FABRICATION

Customer Ref.	PH Job Number
01/09/2016	Design State WorkInProgress
Quantity	Dimensions mm
As per part	Scale on A3 1:40
Material	Projection ⊕
As per part	Sheet Number 1 of 2
Drawn By:	Checked By:
Approved by - Date	Date
Quantity	01/09/2016
Title: CoventryGoods Lift 500 kg General Arrangement	Design State WorkInProgress
Material As per part	Dimensions mm
Scale on A3 1:40	Projection ⊕
Sheet Number 1 of 2	

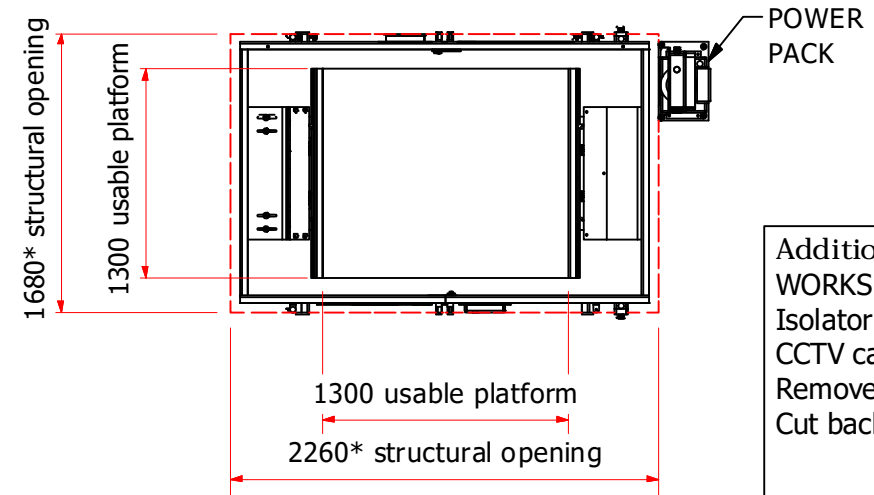

\* Minimum structural opening

Additional Site Requirements  
 WORKS REUQUIRED BY OTHERS -  
 Isolator to be installed on pillar to RHS of lift at lower level  
 CCTV camera to be removed from mezzanine edge  
 Remove orange plate from racking at lower level  
 Cut back handrail on mezzanine to allow for lift

Manual Handling Solutions  
 58 Paige Close, Watlington  
 Kings Lynn, Norfolk PE33 0TQ  
 Tel 01553811977  
 sales@manualhandlingsolutions.co.uk

Drg No.  
Q158670\_GF\_MASTER


Part No  
GF\_MASTER

Reference  
Q158670

Edition  
D

# Coventry (Q158670) Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	500 kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - 4500 mm First to Second Floor - 0 mm
Usable Platform Size	1300 mm (w) x 1300 mm (d)
Platform Guarding	900 mm high barriers to suit loading direction - No gates
Lift Speed	0.2 m/s
Power Supply Required	415 V, 2.2 kW, Three phase and Neutral supply terminated in a double pole isolator at lower level
Controls	Hold to run push button controls (12 v), with emergency stop, adjacent to the gates at each level
Drive Type	Suspension chains with hydraulic motor drive (Twin Mast)
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Load Through
Closed Height	50 mm platform thickness
Ramp	500mm fixed ramp provided
Lift Pit	Floor mounted, no pit required
External Shaft Footprint	2160 mm (w) x 1580 mm (d)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	Electrically Interlocked 2000 mm high double gates
Lift & Guard Colour	std matt black
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.
Unit Mass	1288 Kg

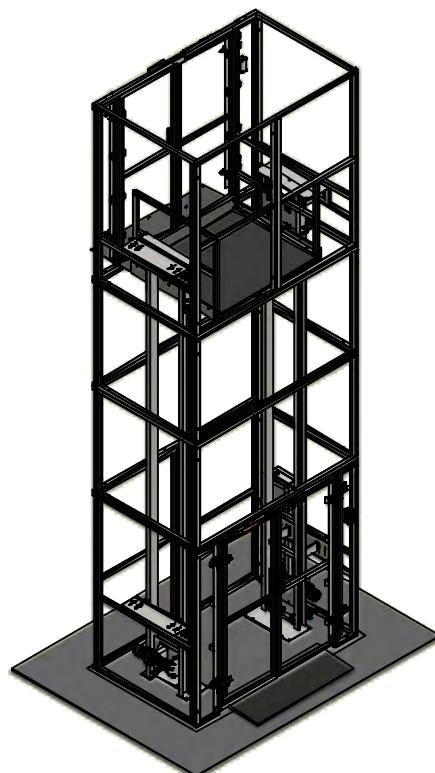

CAD version of your Lift