

* Minimum structural opening

See Page 2 for Product Specification

CUSTOMER APPROVAL SIGNATURE

UNLESS STATED OTHERWISE, GENERAL TOLERANCES TO ISO 2768 TOLERANCE CLASS 'm' FOR MACHINING & 'v' FOR FABRICATION


Additional Site Requirements

Drawn By:	Checked By:	Approved by - Date	Quantity	Date 17/01/2017	Design State WorkInProgress
Title: High Street, Coventry 250 kg General Arrangement			Material As per part	Dimensions mm	Scale on A3 1:38
Manual Handling Solutions 58 Paige Close, Watlington Kings Lynn, Norfolk PE33 0TQ Tel 01553811977 sales@manualhandlingsolutions.co.uk			Drg No. Q172057_GF_MASTER	Reference Q172057	Projection 1st Angle
Edition A				Sheet Number 1 of 2	

High Street, Coventry (Q172057)

Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	250 kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - 2500 mm First to Second Floor - 0 mm
Usable Platform Size	1000 mm (w) x 1000 mm (d)
Platform Guarding	900 mm high barriers to suit loading direction - No gates
Lift Speed	0.2 m/s
Power Supply Required	240 V, 20 Amp, Single phase supply terminated in a double pole isolator at lower level
Controls	Hold to run push button controls (12 v), with emergency stop, adjacent to the gates at each level
Drive Type	Suspension chains with hydraulic motor drive (Single Mast)
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Load Through
Closed Height	50 mm platform thickness
Ramp	500mm fixed ramp provided
Lift Pit	Floor mounted, no pit required
External Shaft Footprint	1610 mm (w) x 1280 mm (d)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	Electrically Interlocked 2000 mm high double gates
Lift & Guard Colour	Std Matt Black
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.
Unit Mass	750 Kg

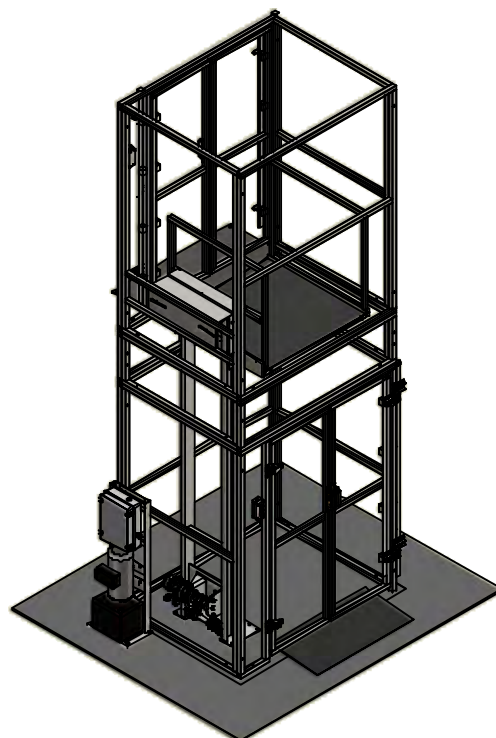

CAD version of your Lift