

Additional Site Requirements
Lift suitable for external conditions

See Page 2 for Product Specification

CUSTOMER APPROVAL SIGNATURE


UNLESS STATED OTHERWISE, GENERAL TOLERANCES TO ISO 2768 TOLERANCE CLASS 'm' FOR MACHINING & 'v' FOR FABRICATION		Customer Ref.	PH Job Number
Drawn By:	Checked By:	Approved by - Date	Quantity
Title: Site, Eastbourne Goods Only - 500 kg General Arrangement		Date 10/11/2016	Design State WorkInProgress
Manual Handling Solutions 58 Paige Close, Watlington Kings Lynn, Norfolk PE33 0TQ Tel 01553811977 sales@manualhandlingsolutions.co.uk		Material As per part	Dimensions mm
Manual Handling Solutions 58 Paige Close, Watlington Kings Lynn, Norfolk PE33 0TQ Tel 01553811977 sales@manualhandlingsolutions.co.uk	Drg No. Q169964_GF_MASTER	Reference Q169964	Scale on A3 1:45
Part No GF_MASTER	Reference Q169964	Projection 1st Angle	Sheet Number 1 of 2
Edition B		Sheet Number 1 of 2	

* Minimum structural opening

Site, Eastbourne (Q169964)

Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	500 kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - 3000 mm First to Second Floor - 0 mm
Usable Platform Size	2000 mm (w) x 1500 mm (d)
Platform Guarding	900 mm high barriers to suit loading direction - No gates
Lift Speed	0.2 m/s
Power Supply Required	415 V, 2.2 kW, Three phase and Neutral supply terminated in a double pole isolator at lower level
Controls	Hold to run push button controls (12 v), with emergency stop, adjacent to the gates at each level
Drive Type	Suspension chains with hydraulic motor drive (Twin Mast)
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Load Through
Closed Height	50 mm platform thickness
Ramp	500mm fixed ramp provided
Lift Pit	Floor mounted, no pit required
External Shaft Footprint	2860 mm (w) x 1780 mm (d)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	Electrically Interlocked 2000 mm high double gates
Lift & Guard Colour	std matt black
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.
Unit Mass	1341 Kg

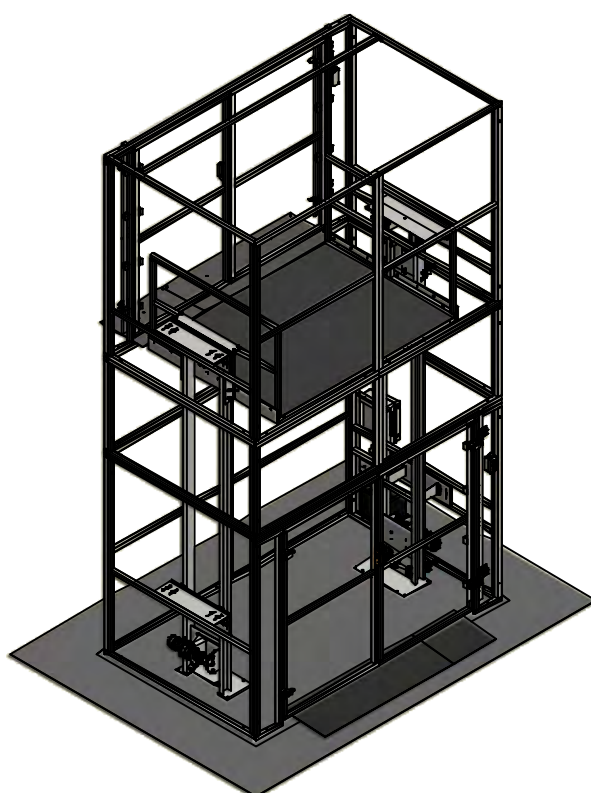

CAD version of your Lift